


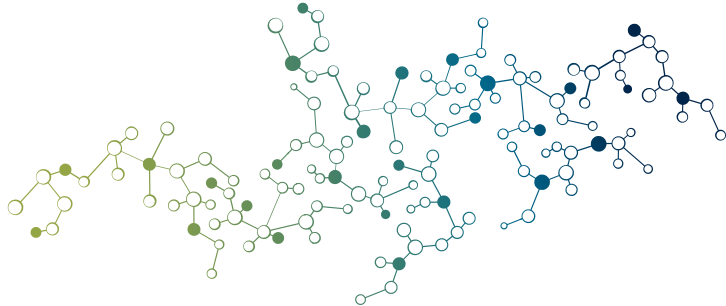

InStruc® PEEKCF30

PRODUCT DESCRIPTION 30% CARBON FIBER REINFORCED POLYETHERETHERKETONE

MATERIAL STATUS Commercial: Active

AVAILABILITY Africa & Middle East, Asia Pacific, Europe, Latin America, North America

FILLER / REINFORCEMENT Carbon Fiber, 30% Filler by Weight

FEATURES Filled, Good Dimensional Stability, High Stiffness, High Strength

USES Aerospace Applications, Connectors, Electrical/Electronic Applications, Engineering Parts, Housings, Industrial Applications, Industrial Parts, Metal Replacement, Military/Defense Applications, Oil/Gas Applications, Outdoor Applications, Semiconductor Applications

FORMS Pellets

PROCESSING METHOD Injection Molding

PHYSICAL	NOMINAL VALUE	UNIT	TEST METHOD
Density / Specific Gravity	1.41		ASTM D792
Molding Shrinkage - Flow (0.125 in)	5.0E-4 to 1.5E-3	in/in	ASTM D955
Water Absorption (24 hr)	0.060	%	ASTM D570
MECHANICAL	NOMINAL VALUE	UNIT	TEST METHOD
Tensile Modulus	3.60E+6	psi	ASTM D638
Tensile Strength	34000	psi	ASTM D638
Tensile Elongation (Yield)	1.0 to 2.0	%	ASTM D638
Flexural Modulus	3.50E+6	psi	ASTM D790
Flexural Strength	48000	psi	ASTM D790
IMPACT	NOMINAL VALUE	UNIT	TEST METHOD
Notched Izod Impact (0.125 in)	1.5	ft-lb/in	ASTM D256
THERMAL	NOMINAL VALUE	UNIT	TEST METHOD
Deflection Temperature Under Load 264 psi, Unannealed	600	°F	ASTM D648
ELECTRICAL	NOMINAL VALUE	UNIT	TEST METHOD
Surface Resistivity	< 1.0E+5	ohms	ASTM D257

INJECTION	NOMINAL VALUE	UNIT
Drying Temperature	300	°F
Drying Time	4.0	hr
Suggested Max Moisture	0.10	%
Processing (Melt) Temp	700 to 750	°F
Mold Temperature	350 to 400	°F
Back Pressure	50.0 to 100	psi
Screw Speed	40 to 70	rpm

NOTES

¹ Typical properties: these are not to be construed as specifications.