



ULTEM™ Resin STM1700

Americas: COMMERCIAL

Siltem STM1700 is a flexible copolymer designed for wire and cable applications. It offers a halogen free (according VDE 0472) flame retardant solution that also offers low smoke emission and toxicity. It is an amber colored transparent material that can be selfcolored and easily processed on conventional equipment. The material may also have a fit in flexible profiles or injection molded parts.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Tensile Stress, yld, Type I, 5 mm/min	630	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 5 mm/min	540	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 5 mm/min	5	%	ASTM D 638
Tensile Strain, brk, Type I, 5 mm/min	20	%	ASTM D 638
Tensile Modulus, 5 mm/min	24400	kgf/cm ²	ASTM D 638
Flexural Stress	950	kgf/cm ²	ASTM D 790
Flexural Stress, yld, 1.3 mm/min, 50 mm span	950	kgf/cm ²	ASTM D 790
Flexural Modulus	21900	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	21900	kgf/cm ²	ASTM D 790
Hardness, Shore D	80	-	ASTM D 2240
Taber Abrasion, CS-17, 1 kg	50	mg/1000cy	ASTM D 1044
Tensile Stress, yield, 50 mm/min	68	MPa	ISO 527
Tensile Stress, break, 50 mm/min	59	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	5	%	ISO 527
Tensile Strain, break, 50 mm/min	15	%	ISO 527
Tensile Modulus, 1 mm/min	2300	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	98	MPa	ISO 178
Flexural Modulus, 2 mm/min	2000	MPa	ISO 178
Tear Strength @ 1.6mm	37	N/mm	ISO 34 (Method A)
IMPACT			
Izod Impact, notched, 23°C	17	cm-kgf/cm	ASTM D 256
Izod Impact, notched 80*10*4 +23°C	16	kJ/m ²	ISO 180/1A

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLER S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller s materials, products, services or recommendations for the user s particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller s Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

© 2015 Saudi Basic Industries Corporation (SABIC).





ULTEM™ Resin STM1700
Americas: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
IMPACT			
Izod Impact, notched 80*10*4 -30°C	8	kJ/m²	ISO 180/1A
THERMAL			
HDT, 1.82 MPa, 3.2mm, unannealed	145	°C	ASTM D 648
Vicat Softening Temp, Rate B/120	180	°C	ISO 306
HDT/Bf, 0.45 MPa Flatw 80*10*4 sp=64mm	164	°C	ISO 75/Bf
PHYSICAL			
Specific Gravity	1.2	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm (5)	0.87 - 0.92	%	SABIC Method
Melt Flow Rate, 295°C/6.6 kgf	7	g/10 min	ASTM D 1238
Density	1.2	g/cm³	ISO 1183
Water Absorption, (23°C/sat)	0.76	%	ISO 62
Matrix Tg	200	°C	DMA
ELECTRICAL			
Volume Resistivity	>1.E+16	Ohm-cm	ASTM D 257
Surface Resistivity	>1.E+15	Ohm	ASTM D 257
Dielectric Strength, in oil, 3.2 mm	16.7	kV/mm	ASTM D 149
Relative Permittivity, 100 Hz	3.13	-	ASTM D 150
Relative Permittivity, 100 kHz	3	-	ASTM D 150
Relative Permittivity, 1 MHz	3.04	-	ASTM D 150
Dissipation Factor, 100 Hz	0.011	-	ASTM D 150
Dissipation Factor, 100 kHz	0.0061	-	ASTM D 150
Dissipation Factor, 1 MHz	0.0054	-	ASTM D 150
FLAME CHARACTERISTICS			
UL Compliant, 94V-0 Flame Class Rating (3)(4)	1.6	mm	UL 94 by SABIC-IP
Oxygen Index (LOI)	48	%	ASTM D 2863

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
(4) Internal measurements according to UL standards.
(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.
(6) Needs hard coat to consistently pass 60 sec Vertical Burn.


Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLER S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller s materials, products, services or recommendations for the user s particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller s Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

©2015Saudi Basic Industries Corporation (SABIC).

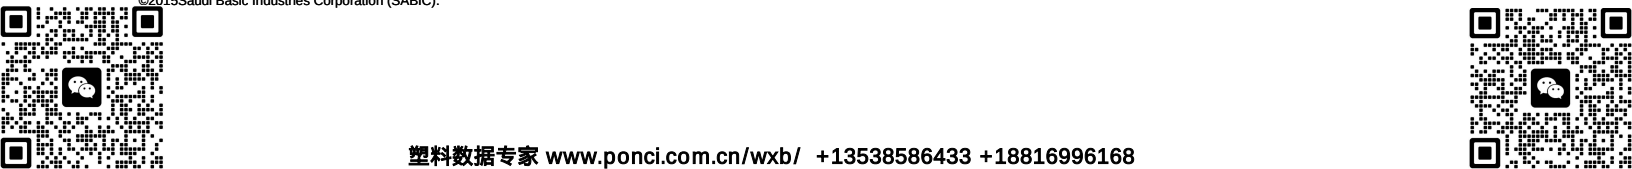



ULTEM™ Resin STM1700

Americas: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	105	°C
Drying Time	4 - 6	hrs
Drying Time (Cumulative)	8	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	320 - 330	°C
Nozzle Temperature	320 - 330	°C
Front - Zone 3 Temperature	320 - 330	°C
Middle - Zone 2 Temperature	320 - 330	°C
Rear - Zone 1 Temperature	320 - 330	°C
Mold Temperature	110 - 120	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	50 - 100	rpm
Shot to Cylinder Size	40 - 60	%
Vent Depth	0.025 - 0.076	mm
Wire Coating Extrusion		
Drying Temperature	110 - 130	°C
Drying Time	4 - 6	hrs
Maximum Moisture Content	0.02	%
Extruder Length/Diameter Ratio (L/D)	22:1 to 28:1	-
Compression Ratio	2.1:1 to 2.7:1	-
Feed - Compression - Metering	10 - 5 - 10	D
Screw Speed	5 - 50	rpm
Feed Zone Temperature	310 - 340	°C
Middle Zone Temperatures	320 - 350	°C
Head Zone Temperature	330 - 360	°C
Neck Temperature	330 - 360	°C
Cross-head Temperature	330 - 360	°C
Die Temperature	330 - 360	°C

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
(4) Internal measurements according to UL standards.
(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.
(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLER S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller s materials, products, services or recommendations for the user s particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller s Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

©2015Saudi Basic Industries Corporation (SABIC).





ULTEM™ Resin STM1700
Americas: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Wire Coating Extrusion		
Melt Temperature	330 - 360	°C
Conductor Pre-heat Temperature	100 - 150	°C
Screen Pack	100 - 200	-
Water Bath Temperature	70 - 90	°C

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
(4) Internal measurements according to UL standards.
(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.
(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES (SELLER) ARE SOLD SUBJECT TO SELLER S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller s materials, products, services or recommendations for the user s particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller s Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates.

©2015Saudi Basic Industries Corporation (SABIC).

