



CYCOLAC™ Resin G366

Europe-Africa-Middle East: LIMITED USE

CYCOLAC G366 is a "new technology" grade of ABS exhibiting outstanding property balance, a good flow, medium impact, medium to high heat resistant and an excellent stability during injection moulding. It is recommended for large or complex parts in automotive, electrical power tool segments and consumer industry.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Taber Abrasion, CS-17, 1 kg	100	mg/1000cy	SABIC Method
Tensile Stress, yield, 5 mm/min	45	MPa	ISO 527
Tensile Stress, break, 5 mm/min	30	MPa	ISO 527
Tensile Stress, yield, 50 mm/min	50	MPa	ISO 527
Tensile Stress, break, 50 mm/min	40	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	2	%	ISO 527
Tensile Strain, break, 5 mm/min	15	%	ISO 527
Tensile Strain, yield, 50 mm/min	3	%	ISO 527
Tensile Strain, break, 50 mm/min	15	%	ISO 527
Tensile Modulus, 1 mm/min	2600	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	74	MPa	ISO 178
Flexural Modulus, 2 mm/min	2600	MPa	ISO 178
Hardness, H358/30	99	MPa	ISO 2039-1
Hardness, Rockwell R	115	-	ISO 2039-2
IMPACT			
Izod Impact, notched 80*10*4 +23°C	12	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	6	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	12	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm	7	kJ/m ²	ISO 179/1eA
THERMAL			
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, 23°C to 60°C, flow	8.E-05	1/°C	ISO 11359-2
CTE, 23°C to 60°C, xflow	8.E-05	1/°C	ISO 11359-2

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
(4) Internal measurements according to UL standards.
(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.



CYCOLAC™ Resin G366

Europe-Africa-Middle East: LIMITED USE

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
Ball Pressure Test, 75°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	106	°C	ISO 306
Vicat Softening Temp, Rate B/120	108	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	96	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	82	°C	ISO 75/Ae
Relative Temp Index, Elec	80	°C	UL 746B
Relative Temp Index, Mech w/impact	80	°C	UL 746B
Relative Temp Index, Mech w/o impact	80	°C	UL 746B
PHYSICAL			
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.5 - 0.7	%	SABIC Method
Density	1.05	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	1	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.2	%	ISO 62
Melt Flow Rate, 220°C/10.0 kg	8	g/10 min	ISO 1133
Melt Volume Rate, MVR at 220°C/10.0 kg	8	cm ³ /10 min	ISO 1133
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	35	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	26	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	18	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	2.8	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.011	-	IEC 60250
Dissipation Factor, 1 MHz	0.014	-	IEC 60250
Comparative Tracking Index	575	V	IEC 60112

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
(4) Internal measurements according to UL standards.
(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.



CYCOLAC™ Resin G366
Europe-Africa-Middle East: LIMITED USE

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
ELECTRICAL			
Relative Permittivity, 50/60 Hz	2.9	-	IEC 60250
FLAME CHARACTERISTICS			
UL Recognized, 94HB Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94HB Flame Class Rating 2nd value (3)	3	mm	UL 94
Glow Wire Flammability Index 650°C, passes at	3.2	mm	IEC 60695-2-12
Glow Wire Flammability Index 750°C, passes at	1	mm	IEC 60695-2-12
FMVSS Burning Speed, thickness 1 mm	25	mm/min	FMVSS 302

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
(4) Internal measurements according to UL standards.
(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.



CYCOLAC™ Resin G366

Europe-Africa-Middle East: LIMITED USE

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	90 - 100	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.1	%
Melt Temperature	250 - 280	°C
Nozzle Temperature	245 - 275	°C
Front - Zone 3 Temperature	250 - 280	°C
Middle - Zone 2 Temperature	250 - 280	°C
Rear - Zone 1 Temperature	230 - 260	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	40 - 80	°C

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:



CYCOLAC™ Resin G366

Europe-Africa-Middle East: LIMITED USE


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

CYCOLAC® G366

Melt Temperature : 260°C

Mold Temperature : 60°C

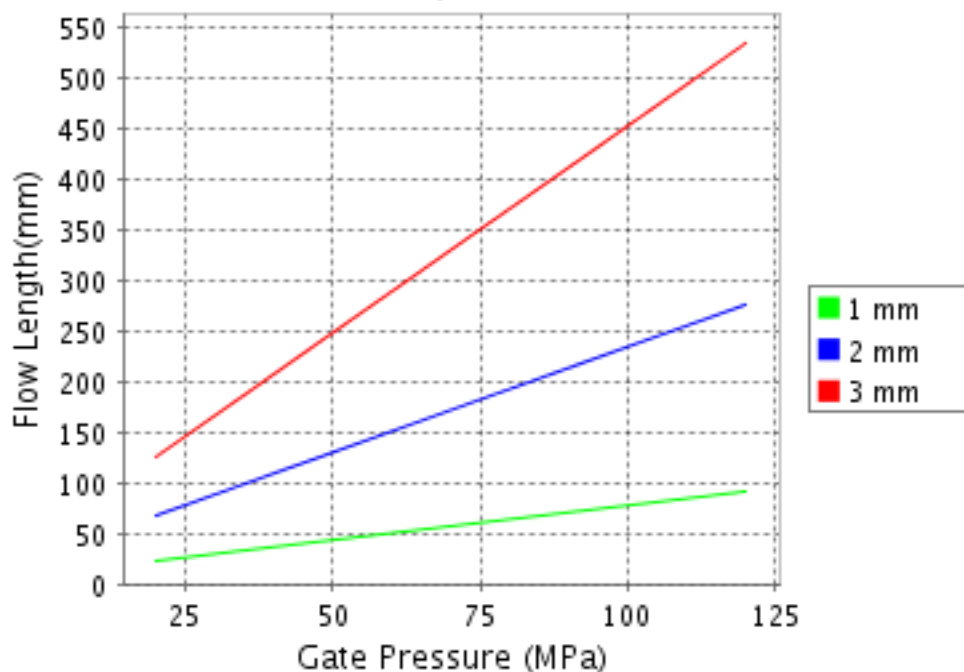

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

® Moldflow is a registered trademark of the Moldflow Corporation.

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.