



CYCOLOY™ Resin C1000HF

Europe-Africa-Middle East: LIMITED USE

CYCOLOY C1000HF is a general purpose PC+ABS blend specially developed for thin wall applications requiring a high flow with a good balance of properties. It is suitable for applications in the automotive and appliance industry.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Taber Abrasion, CS-17, 1 kg	71	mg/1000cy	SABIC Method
Tensile Stress, yield, 5 mm/min	50	MPa	ISO 527
Tensile Stress, break, 5 mm/min	40	MPa	ISO 527
Tensile Stress, yield, 50 mm/min	55	MPa	ISO 527
Tensile Stress, break, 50 mm/min	45	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	4	%	ISO 527
Tensile Strain, break, 5 mm/min	45	%	ISO 527
Tensile Strain, yield, 50 mm/min	4	%	ISO 527
Tensile Strain, break, 50 mm/min	25	%	ISO 527
Tensile Modulus, 1 mm/min	2400	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	86	MPa	ISO 178
Flexural Modulus, 2 mm/min	2300	MPa	ISO 178
Hardness, H358/30	98	MPa	ISO 2039-1
Hardness, Rockwell R	117	-	ISO 2039-2
IMPACT			
Izod Impact, notched 80*10*3 +23°C	40	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	15	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	40	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	15	kJ/m ²	ISO 179/1eA
THERMAL			
Thermal Conductivity	0.2	W/m·°C	ISO 8302
CTE, -40°C to 40°C, flow	8.E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	8.E-05	1/°C	ISO 11359-2

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:





CYCOLOY™ Resin C1000HF

Europe-Africa-Middle East: LIMITED USE

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
Ball Pressure Test, 75°C +/- 2°C	PASSES	-	IEC 60695-10-2
Ball Pressure Test, approximate maximum	100	°C	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	114	°C	ISO 306
Vicat Softening Temp, Rate B/120	116	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	117	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	95	°C	ISO 75/Ae
Relative Temp Index, Elec	60	°C	UL 746B
Relative Temp Index, Mech w/impact	60	°C	UL 746B
Relative Temp Index, Mech w/o impact	60	°C	UL 746B
PHYSICAL			
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.5 - 0.7	%	SABIC Method
Density	1.12	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.7	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.2	%	ISO 62
Melt Volume Rate, MVR at 260°C/5.0 kg	24	cm ³ /10 min	ISO 1133
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	35	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	25	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	17	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	2.7	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.002	-	IEC 60250
Dissipation Factor, 1 MHz	0.007	-	IEC 60250
Relative Permittivity, 50/60 Hz	2.8	-	IEC 60250

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:





CYCOLOY™ Resin C1000HF
Europe-Africa-Middle East: LIMITED USE

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
FLAME CHARACTERISTICS			
UL Recognized, 94HB Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94HB Flame Class Rating 2nd value (3)	3	mm	UL 94
Glow Wire Flammability Index 650°C, passes at	3.2	mm	IEC 60695-2-12

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
(4) Internal measurements according to UL standards.
(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.
(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:





CYCOLOY™ Resin C1000HF

Europe-Africa-Middle East: LIMITED USE

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	95 - 105	°C
Drying Time	3 - 4	hrs
Drying Time (Cumulative)	8	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	260 - 290	°C
Nozzle Temperature	260 - 290	°C
Front - Zone 3 Temperature	255 - 290	°C
Middle - Zone 2 Temperature	255 - 290	°C
Rear - Zone 1 Temperature	250 - 280	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	60 - 90	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 70	rpm
Shot to Cylinder Size	30 - 80	%
Vent Depth	0.038 - 0.076	mm

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

Source GMD, last updated:





CYCOLOY™ Resin C1000HF

Europe-Africa-Middle East: LIMITED USE


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

CYCOLOY® C1000HF

Melt Temperature : 275°C

Mold Temperature : 75°C

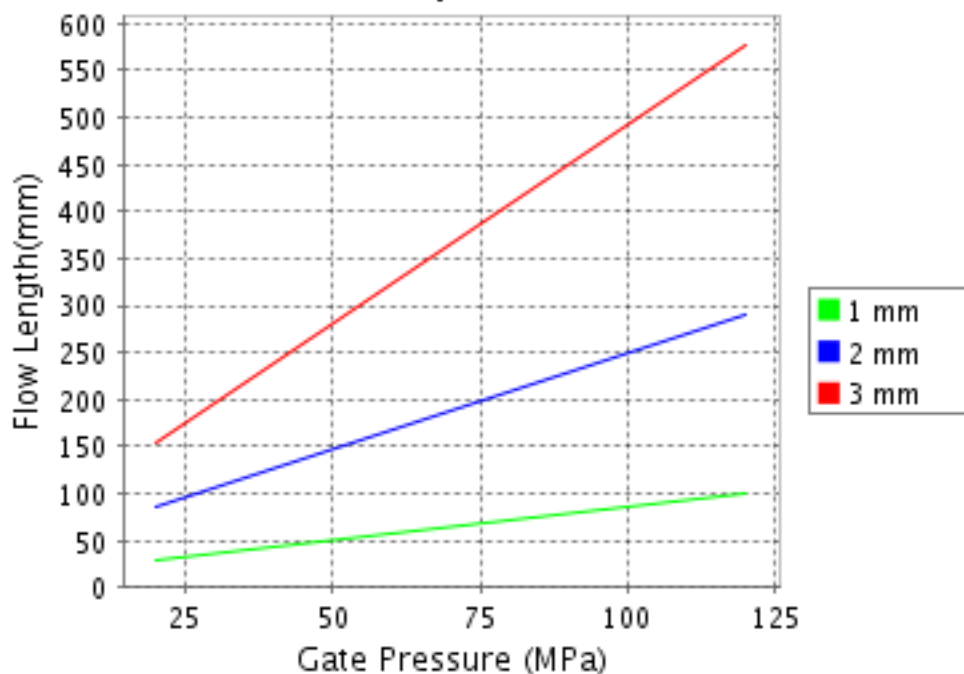

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

® Moldflow is a registered trademark of the Moldflow Corporation.

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
(4) Internal measurements according to UL standards.
(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.
(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

