



Braskem PP FPT300F

Braskem America Inc. - Polypropylene Homopolymer

Wednesday, October 9, 2019

General Information

Product Description

Good mold release, excellent part finish (low bloom)

Applications

Suggested uses include housewares, caps and closures, cups, thin-walled containers

General

Material Status	• Commercial: Active
Availability	• North America
Features	• Good Mold Release • Good Surface Finish • Low Blooming
Uses	• Caps • Containers • Household Goods • Closures • Cups
Agency Ratings	• FDA 21 CFR 177.1520

ASTM & ISO Properties¹


Physical	Nominal Value	Unit	Test Method
Melt Mass-Flow Rate (MFR) (230°C/2.16 kg)	30	g/10 min	ASTM D1238
Mechanical	Nominal Value	Unit	Test Method
Tensile Strength ² (Yield)	33.1	MPa	ASTM D638
Tensile Elongation ² (Yield)	10	%	ASTM D638
Flexural Modulus - 1% Secant ³	1380	MPa	ASTM D790A
Impact	Nominal Value	Unit	Test Method
Notched Izod Impact (23°C)	37	J/m	ASTM D256A
Hardness	Nominal Value	Unit	Test Method
Rockwell Hardness (R-Scale)	104		ASTM D785

Notes

¹ Typical properties: these are not to be construed as specifications.

² 51 mm/min

³ 1.3 mm/min

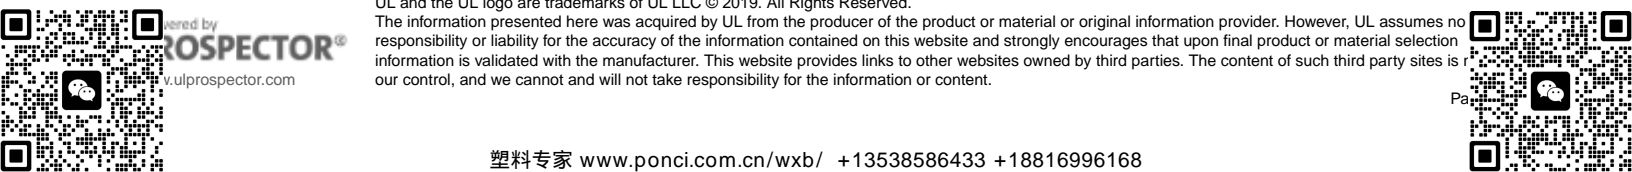

UL and the UL logo are trademarks of UL LLC © 2019. All Rights Reserved.

The information presented here was acquired by UL from the producer of the product or material or original information provider. However, UL assumes no responsibility or liability for the accuracy of the information contained on this website and strongly encourages that upon final product or material selection information is validated with the manufacturer. This website provides links to other websites owned by third parties. The content of such third party sites is not under our control, and we cannot and will not take responsibility for the information or content.