



Cycolac* Resin S157

Europe-Africa-Middle East: COMMERCIAL

CYCOLAC S157 is a high flow flame retardant ABS with good processability developed for applications requiring UL94 V0 at reduced wall thickness.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Taber Abrasion, CS-17, 1 kg	145	mg/1000cy	SABIC Method
Tensile Stress, yield, 5 mm/min	40	MPa	ISO 527
Tensile Stress, break, 5 mm/min	35	MPa	ISO 527
Tensile Stress, yield, 50 mm/min	45	MPa	ISO 527
Tensile Stress, break, 50 mm/min	35	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	2	%	ISO 527
Tensile Strain, break, 5 mm/min	10	%	ISO 527
Tensile Strain, yield, 50 mm/min	2	%	ISO 527
Tensile Strain, break, 50 mm/min	10	%	ISO 527
Tensile Modulus, 1 mm/min	2700	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	70	MPa	ISO 178
Flexural Modulus, 2 mm/min	2500	MPa	ISO 178
Hardness, H358/30	100	MPa	ISO 2039-1
Hardness, Rockwell R	112	-	ISO 2039-2
IMPACT			
Izod Impact, unnotched 80*10*4 +23°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*4 -30°C	55	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*4 +23°C	9	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	4	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	8	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm	3	kJ/m ²	ISO 179/1eA
THERMAL			
Thermal Conductivity	0.2	W/m-°C	ISO 8302



Cycolac* Resin S157

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
CTE, 23°C to 60°C, flow	8.E-05	1/°C	ISO 11359-2
CTE, 23°C to 60°C, xflow	8.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 75°C +/- 2°C	PASSES	-	IEC 60695-10-2
Ball Pressure Test, approximate maximum	80	°C	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	84	°C	ISO 306
Vicat Softening Temp, Rate B/120	86	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	81	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	74	°C	ISO 75/Ae
Relative Temp Index, Elec	60	°C	UL 746B
Relative Temp Index, Mech w/impact	60	°C	UL 746B
Relative Temp Index, Mech w/o impact	60	°C	UL 746B
PHYSICAL			
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.4 - 0.7	%	SABIC Method
Density	1.18	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	1	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.2	%	ISO 62
Melt Flow Rate, 220°C/5.0 kg	17	g/10 min	ISO 1133
Melt Flow Rate, 220°C/10.0 kg	78	g/10 min	ISO 1133
Melt Volume Rate, MVR at 220°C/5.0 kg	16	cm ³ /10 min	ISO 1133
Melt Volume Rate, MVR at 220°C/10.0 kg	72	cm ³ /10 min	ISO 1133
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	35	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	26	kV/mm	IEC 60243-1



Cycolac* Resin S157

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
ELECTRICAL			
Dielectric Strength, in oil, 3.2 mm	18	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	2.7	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.005	-	IEC 60250
Dissipation Factor, 1 MHz	0.01	-	IEC 60250
Comparative Tracking Index	450	V	IEC 60112
Relative Permittivity, 50/60 Hz	2.8	-	IEC 60250
FLAME CHARACTERISTICS			
UL Recognized, 94V-0 Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94-5VA Rating (3)	3	mm	UL 94
UL Recognized, 94-5VB Rating (3)	2.5	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	1	mm	IEC 60695-2-12
Oxygen Index (LOI)	28	%	ISO 4589



Cycolac* Resin S157

Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	80 - 85	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.1	%
Melt Temperature	180 - 210	°C
Nozzle Temperature	180 - 200	°C
Front - Zone 3 Temperature	185 - 205	°C
Middle - Zone 2 Temperature	185 - 205	°C
Rear - Zone 1 Temperature	170 - 190	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	40 - 80	°C



Cyclac* Resin S157

Europe-Africa-Middle East: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

Cyclac* S157

Melt Temperature : 220°C

Mold Temperature : 60°C

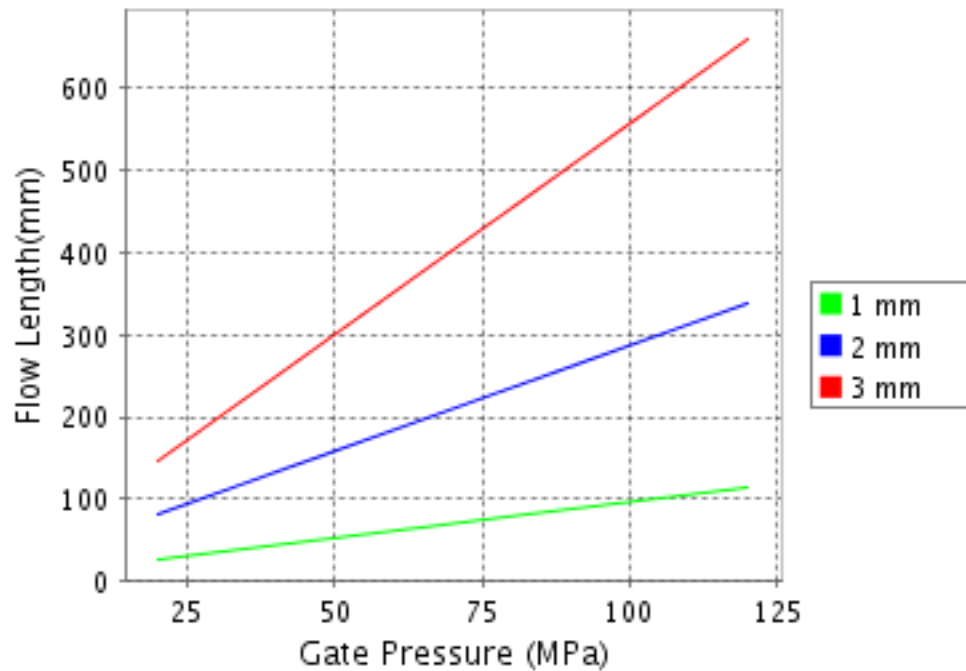

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

© Moldflow is a registered trademark of the Moldflow Corporation.