



VALOX™ Resin 3607U

Europe-Africa-Middle East: COMMERCIAL

COMMERCIAL, VALOX 3607U is a UV-stabilized, flame retardant, injection moulding PBT resin, offering excellent weatherability resistance. Applications: powerplugs

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Taber Abrasion, CS-17, 1 kg	30	mg/1000cy	SABIC Method
Tensile Stress, yield, 50 mm/min	50	MPa	ISO 527
Tensile Stress, break, 50 mm/min	45	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	4.7	%	ISO 527
Tensile Strain, break, 50 mm/min	100	%	ISO 527
Tensile Modulus, 1 mm/min	2050	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	70	MPa	ISO 178
Flexural Modulus, 2 mm/min	2050	MPa	ISO 178
Hardness, H358/30	91	MPa	ISO 2039-1
Hardness, Rockwell R	116	-	ISO 2039-2
IMPACT			
Izod Impact, unnotched 80*10*4 +23°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*4 -30°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*4 +23°C	50	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	20	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	50	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm	20	kJ/m ²	ISO 179/1eA
Charpy 23°C, Unnotch Edgew 80*10*4 sp=62mm	NB	kJ/m ²	ISO 179/1eU
Charpy -30°C, Unnotch Edgew 80*10*4 sp=62mm	NB	kJ/m ²	ISO 179/1eU
THERMAL			
CTE, 23°C to 80°C, flow	1.05E-04	1/°C	ISO 11359-2
CTE, 23°C to 80°C, xflow	1.1E-04	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2



VALOX™ Resin 3607U

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
Vicat Softening Temp, Rate A/50	160	°C	ISO 306
Vicat Softening Temp, Rate B/50	125	°C	ISO 306
Vicat Softening Temp, Rate B/120	130	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	110	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	80	°C	ISO 75/Ae
Relative Temp Index, Elec	80	°C	UL 746B
Relative Temp Index, Mech w/impact	80	°C	UL 746B
Relative Temp Index, Mech w/o impact	80	°C	UL 746B
PHYSICAL			
Mold Shrinkage on Tensile Bar, flow (2) (5)	1 - 1.8	%	SABIC Method
Mold Shrinkage on Tensile Bar, xflow (2) (5)	0.9 - 1.8	%	SABIC Method
Density	1.25	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.5	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.14	%	ISO 62
Melt Flow Rate, 250°C/5.0 kg	16	g/10 min	ISO 1133
Melt Volume Rate, MVR at 250°C/5.0 kg	14	cm ³ /10 min	ISO 1133
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 3.2 mm	16	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	2.7	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.002	-	IEC 60250
Dissipation Factor, 1 MHz	0.012	-	IEC 60250
Comparative Tracking Index	225	V	IEC 60112
Relative Permittivity, 50/60 Hz	2.8	-	IEC 60250



VALOX™ Resin 3607U
Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
FLAME CHARACTERISTICS			
UL Recognized, 94V-1 Flame Class Rating (3)	3	mm	UL 94
Glow Wire Flammability Index 850°C, passes at	1.6	mm	IEC 60695-2-12



VALOX™ Resin 3607U


Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	110 - 120	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	250 - 270	°C
Nozzle Temperature	240 - 260	°C
Front - Zone 3 Temperature	245 - 265	°C
Middle - Zone 2 Temperature	240 - 255	°C
Rear - Zone 1 Temperature	230 - 245	°C
Hopper Temperature	40 - 60	°C
Mold Temperature	40 - 100	°C



VALOX™ Resin 3607U

Europe-Africa-Middle East: COMMERCIAL

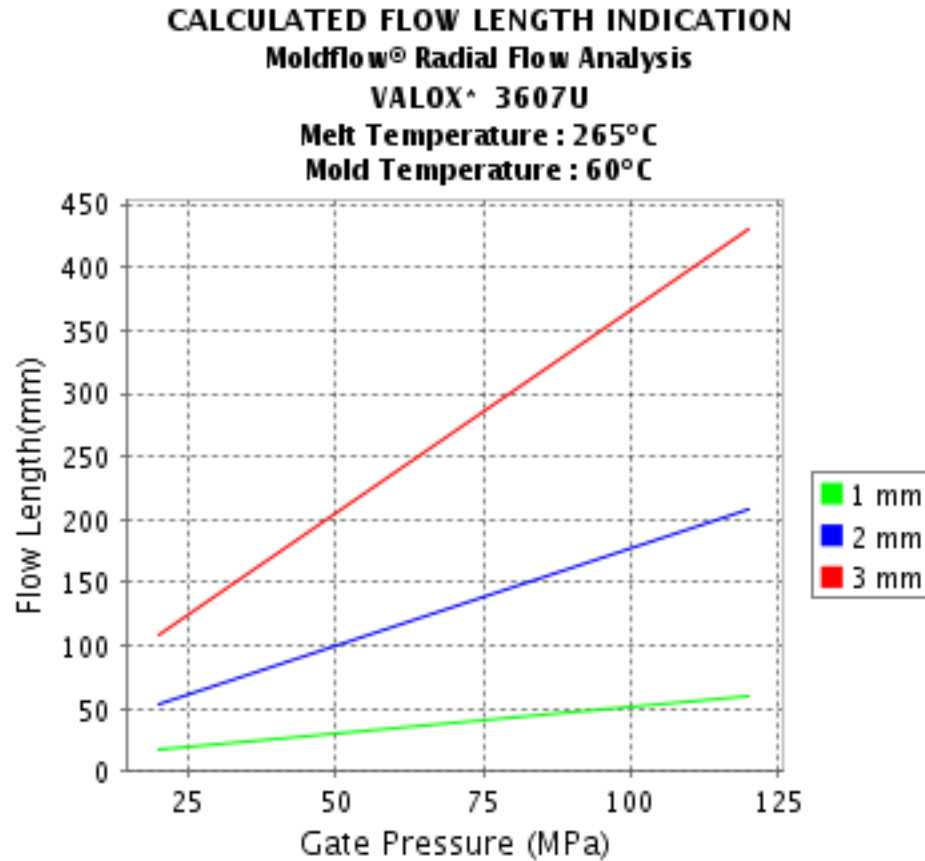

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

© Moldflow is a registered trademark of the Moldflow Corporation.