



VALOX™ Resin 865

Europe-Africa-Middle East: COMMERCIAL

VALOX 865 is a 30% glass fibre reinforced, non blooming flame retardant PBT+PET blend with an excellent surface appearance. Applications: External housings, steam irons, appliance housings and lighting parts.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Tensile Stress, yld, Type I, 5 mm/min	1370	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 5 mm/min	1370	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 5 mm/min	2	%	ASTM D 638
Tensile Strain, brk, Type I, 5 mm/min	2	%	ASTM D 638
Tensile Modulus, 5 mm/min	112100	kgf/cm ²	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	1880	kgf/cm ²	ASTM D 790
Flexural Stress, brk, 1.3 mm/min, 50 mm span	1880	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	91700	kgf/cm ²	ASTM D 790
Tensile Stress, yield, 5 mm/min	130	MPa	ISO 527
Tensile Stress, break, 5 mm/min	130	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	2	%	ISO 527
Tensile Strain, break, 5 mm/min	2	%	ISO 527
Tensile Modulus, 1 mm/min	11000	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	195	MPa	ISO 178
Flexural Stress, break, 2 mm/min	195	MPa	ISO 178
Flexural Strain, break, 2 mm/min	3	%	ISO 178
Flexural Modulus, 2 mm/min	9200	MPa	ISO 178
Hardness, H358/30	115	MPa	ISO 2039-1
Hardness, Rockwell R	120	-	ISO 2039-2
IMPACT			
Charpy Impact, unnotched, 23°C	55	kJ/m ²	ISO 179/2C
Charpy Impact, unnotched, -30°C	50	kJ/m ²	ISO 179/2C



VALOX™ Resin 865

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
IMPACT			
Izod Impact, unnotched, 23°C	74	cm-kgf/cm	ASTM D 4812
Izod Impact, unnotched, -30°C	73	cm-kgf/cm	ASTM D 4812
Izod Impact, notched, 23°C	7	cm-kgf/cm	ASTM D 256
Izod Impact, notched, 0°C	7	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	7	cm-kgf/cm	ASTM D 256
Izod Impact, unnotched 80*10*4 +23°C	50	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*4 -30°C	45	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*4 +23°C	8	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 0°C	8	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	7	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	8	kJ/m ²	ISO 179/1eA
Charpy Impact, notched, 23°C	8	kJ/m ²	ISO 179/2C
Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm	8	kJ/m ²	ISO 179/1eA
Charpy Impact, notched, -30°C	8	kJ/m ²	ISO 179/2C
Charpy 23°C, Unnotch Edgew 80*10*4 sp=62mm	50	kJ/m ²	ISO 179/1eU
Charpy -30°C, Unnotch Edgew 80*10*4 sp=62mm	NB	kJ/m ²	ISO 179/1eU
THERMAL			
Vicat Softening Temp, Rate A/50	220	°C	ASTM D 1525
Vicat Softening Temp, Rate B/50	200	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	215	°C	ASTM D 648
HDT, 1.82 MPa, 3.2mm, unannealed	195	°C	ASTM D 648
CTE, -40°C to 40°C, flow	1.96E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	6.05E-05	1/°C	ISO 11359-2
CTE, 23°C to 80°C, flow	3.5E-05	1/°C	ISO 11359-2



VALOX™ Resin 865

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
CTE, 23°C to 80°C, xflow	1.E-04	1/°C	ISO 11359-2
CTE, 23°C to 150°C, flow	1.68E-05	1/°C	ISO 11359-2
CTE, 23°C to 150°C, xflow	1.48E-04	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate A/50	220	°C	ISO 306
Vicat Softening Temp, Rate B/50	200	°C	ISO 306
Vicat Softening Temp, Rate B/120	200	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	215	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	195	°C	ISO 75/Ae
HDT/Bf, 0.45 MPa Flatw 80*10*4 sp=64mm	215	°C	ISO 75/Bf
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	195	°C	ISO 75/Af
Relative Temp Index, Elec	110	°C	UL 746B
Relative Temp Index, Mech w/impact	110	°C	UL 746B
Relative Temp Index, Mech w/o impact	110	°C	UL 746B
PHYSICAL			
Specific Gravity	1.65	-	ASTM D 792
Filler Content	30	%	ASTM D 229
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.4 - 0.8	%	SABIC Method
Mold Shrinkage on Tensile Bar, xflow (2) (5)	0.6 - 1	%	SABIC Method
Melt Flow Rate, 266°C/5.0 kgf	70	g/10 min	ASTM D 1238
Density	1.65	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.32	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.03	%	ISO 62
Melt Volume Rate, MVR at 250°C/5.0 kg	23	cm ³ /10 min	ISO 1133
Melt Volume Rate, MVR at 265°C/1.2 kg	7	cm ³ /10 min	ISO 1133
Melt Volume Rate, MVR at 265°C/2.16 kg	15	cm ³ /10 min	ISO 1133
Melt Volume Rate, MVR at 265°C/5.0 kg	50	cm ³ /10 min	ISO 1133



VALOX™ Resin 865

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
PHYSICAL			
Melt Viscosity, 260°C, 1500 sec-1	145	Pa-s	ISO 11443
ELECTRICAL			
Volume Resistivity	1.E+15	Ohm-cm	ASTM D 257
Dielectric Strength, in oil, 0.8 mm	25	kV/mm	ASTM D 149
Dielectric Strength, in oil, 1.6 mm	19	kV/mm	ASTM D 149
Dielectric Strength, in oil, 3.2 mm	15	kV/mm	ASTM D 149
Arc Resistance, Tungsten {PLC}	6	PLC Code	ASTM D 495
Hot Wire Ignition {PLC}	1	PLC Code	UL 746A
High Voltage Arc Track Rate {PLC}	4	PLC Code	UL 746A
High Ampere Arc Ign, surface {PLC}	3	PLC Code	UL 746A
Comparative Tracking Index (UL) {PLC}	3	PLC Code	UL 746A
Volume Resistivity	1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	25	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	19	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	15	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	3.3	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.001	-	IEC 60250
Dissipation Factor, 1 MHz	0.012	-	IEC 60250
Comparative Tracking Index	225	V	IEC 60112
Comparative Tracking Index, M	150	V	IEC 60112
Relative Permittivity, 50/60 Hz	3.4	-	IEC 60250
FLAME CHARACTERISTICS			
UL Recognized, 94V-0 Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94-5VA Rating (3)	3	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	1	mm	IEC 60695-2-12
Oxygen Index (LOI)	31	%	ISO 4589



VALOX™ Resin 865


Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	110 - 120	°C
Drying Time	4 - 6	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	260 - 285	°C
Nozzle Temperature	265 - 275	°C
Front - Zone 3 Temperature	260 - 280	°C
Middle - Zone 2 Temperature	255 - 280	°C
Rear - Zone 1 Temperature	240 - 260	°C
Hopper Temperature	40 - 60	°C
Mold Temperature	60 - 110	°C



VALOX™ Resin 865

Europe-Africa-Middle East: COMMERCIAL

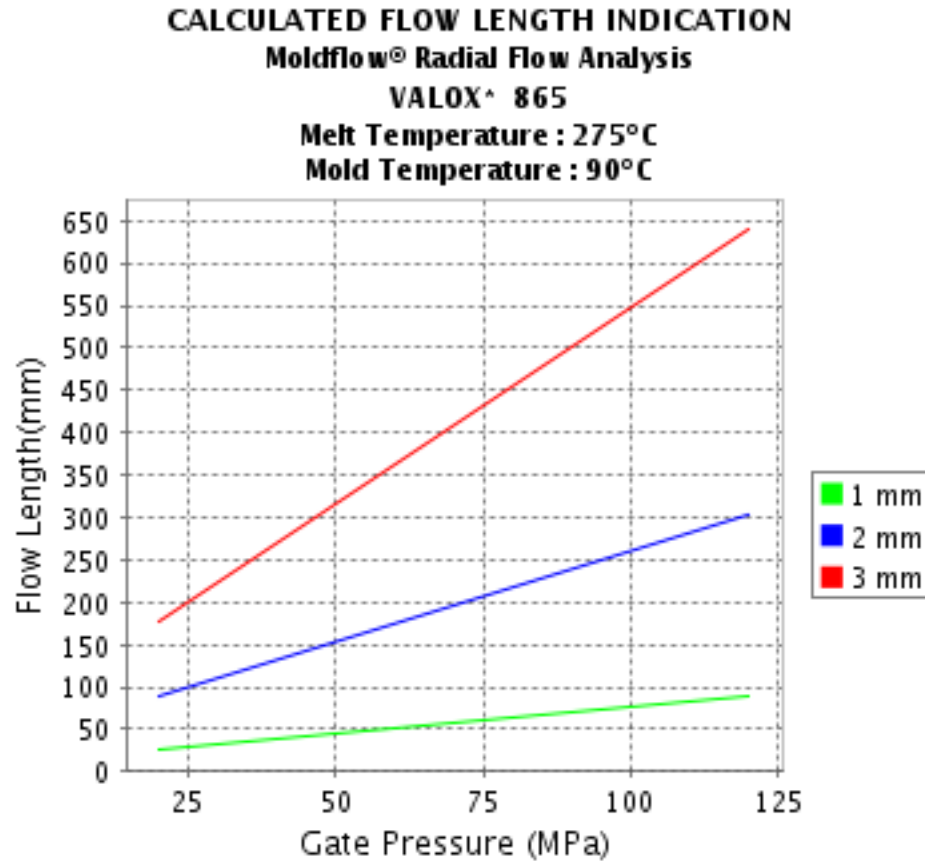

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

© Moldflow is a registered trademark of the Moldflow Corporation.