



LEXAN™ Resin FXG1413T
Asia Pacific: COMMERCIAL

PC-siloxane copolymer in special "Diamond Sparkle" colors. Medium flow. Improved toughness compared to medium flow standard PC in same color. Color package may affect performance.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	600	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	470	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	6	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	69	%	ASTM D 638
Tensile Modulus, 50 mm/min	23100	kgf/cm ²	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	860	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	23100	kgf/cm ²	ASTM D 790
Tensile Stress, yield, 50 mm/min	57	MPa	ISO 527
Tensile Stress, break, 50 mm/min	46	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	5.6	%	ISO 527
Tensile Strain, break, 50 mm/min	38	%	ISO 527
Tensile Modulus, 1 mm/min	2330	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	90	MPa	ISO 178
Flexural Modulus, 2 mm/min	2190	MPa	ISO 178
IMPACT			
Izod Impact, notched, 23°C	58	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	38	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	552	cm-kgf	ASTM D 3763
Izod Impact, notched 80*10*4 +23°C	36	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	16	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	19	kJ/m ²	ISO 179/1eA
THERMAL			
Vicat Softening Temp, Rate B/50	142	°C	ASTM D 1525



LEXAN™ Resin FXG1413T
Asia Pacific: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
HDT, 1.82 MPa, 3.2mm, unannealed	123	°C	ASTM D 648
CTE, -40°C to 95°C, flow	7.15E-05	1/°C	ASTM E 831
CTE, -40°C to 95°C, xflow	7.93E-05	1/°C	ASTM E 831
CTE, 23°C to 80°C, flow	7.15E-05	1/°C	ISO 11359-2
CTE, 23°C to 80°C, xflow	7.93E-05	1/°C	ISO 11359-2
Ball Pressure Test, 75°C +/- 2°C	PASS	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	141	°C	ISO 306
Vicat Softening Temp, Rate B/120	143	°C	ISO 306
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	119	°C	ISO 75/Af
PHYSICAL			
Specific Gravity	1.18	-	ASTM D 792
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.4 - 0.8	%	SABIC Method
Mold Shrinkage, flow, 3.2 mm (5)	0.4 - 0.8	%	SABIC Method
Mold Shrinkage, xflow, 3.2 mm (5)	0.4 - 0.8	%	SABIC Method
Melt Flow Rate, 300°C/1.2 kgf	10	g/10 min	ASTM D 1238
Density	1.18	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.12	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.09	%	ISO 62
Melt Volume Rate, MVR at 300°C/1.2 kg	9	cm ³ /10 min	ISO 1133



LEXAN™ Resin FXG1413T
Asia Pacific: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	120	°C
Drying Time	3 - 4	hrs
Drying Time (Cumulative)	48	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	295 - 315	°C
Nozzle Temperature	290 - 310	°C
Front - Zone 3 Temperature	295 - 315	°C
Middle - Zone 2 Temperature	280 - 305	°C
Rear - Zone 1 Temperature	215 - 295	°C
Mold Temperature	70 - 95	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 70	rpm
Shot to Cylinder Size	40 - 60	%
Vent Depth	0.025 - 0.076	mm

• NOTE: Back Pressure, Screw Speed, Shot to Cylinder Size and Vent Depth are only mentioned as general guidelines. These may not apply or need adjustment in specific situations such as low shot sizes, thin wall molding and gas-assist molding.



LEXAN™ Resin FXG1413T
Asia Pacific: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

LEXAN® FXG1413T

Melt Temperature : 305°C

Mold Temperature : 85°C

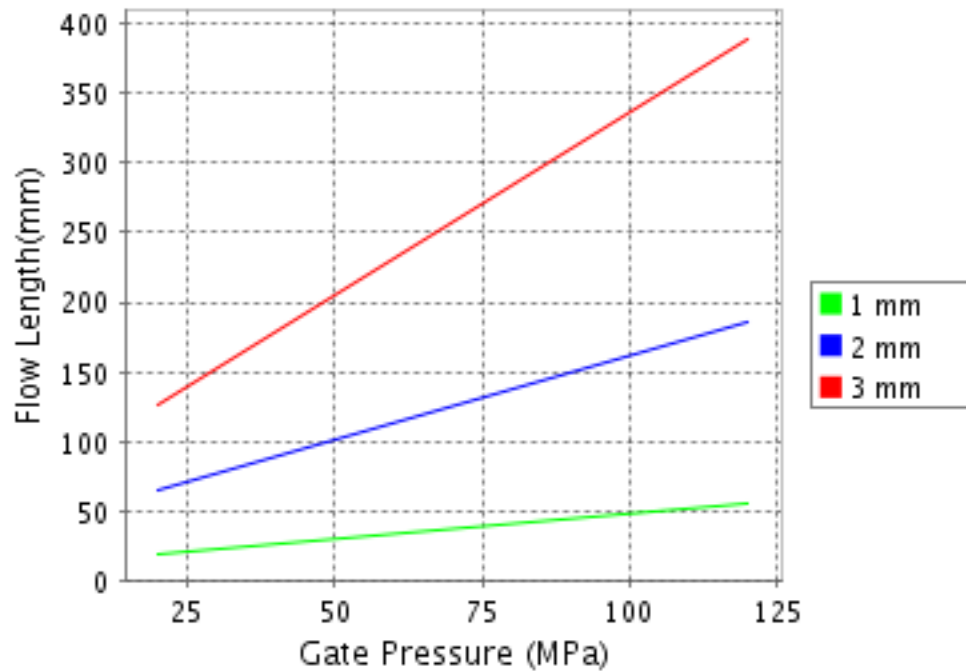

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

© Moldflow is a registered trademark of the Moldflow Corporation.