



Lexan* Resin EXL1162T

Asia Pacific: COMMERCIAL

Lexan* EXL1162T polycarbonate (PC) siloxane copolymer resin is a transparent injection molding (IM) grade with extra release properties. This resin offers good low temperature (-20 C) ductility in combination with high flow characteristics and excellent processability with opportunities for shorter IM cycle times compared to standard PC resins. Lexan EXL1162T resin is a general purpose product available in transparent and opaque colors and may be an excellent candidate for a broad range of applications.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	590	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	580	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	5.7	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	117.9	%	ASTM D 638
Tensile Modulus, 50 mm/min	23000	kgf/cm ²	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	960	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	22900	kgf/cm ²	ASTM D 790
Tensile Stress, yield, 50 mm/min	57	MPa	ISO 527
Tensile Stress, break, 50 mm/min	56	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	5.4	%	ISO 527
Tensile Strain, break, 50 mm/min	119.4	%	ISO 527
Tensile Modulus, 1 mm/min	2340	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	89	MPa	ISO 178
Flexural Modulus, 2 mm/min	2140	MPa	ISO 178
Hardness, Rockwell L	89	-	ISO 2039-2
IMPACT			
Izod Impact, notched, 23°C	75	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	63	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	763	cm-kgf	ASTM D 3763
Izod Impact, unnotched 80*10*3 +23°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*3 -30°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*3 +23°C	55	kJ/m ²	ISO 180/1A



Lexan* Resin EXL1162T

Asia Pacific: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
IMPACT			
Izod Impact, notched 80*10*3 -30°C	40	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	65	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	45	kJ/m ²	ISO 179/1eA
Charpy 23°C, Unnotch Edgew 80*10*3 sp=62mm	NB	kJ/m ²	ISO 179/1eU
Charpy -30°C, Unnotch Edgew 80*10*3 sp=62mm	NB	kJ/m ²	ISO 179/1eU
THERMAL			
Vicat Softening Temp, Rate A/50	138	°C	ASTM D 1525
HDT, 1.82 MPa, 3.2mm, unannealed	121	°C	ASTM D 648
CTE, -40°C to 95°C, flow	7.48E-05	1/°C	ASTM E 831
CTE, -40°C to 95°C, xflow	7.64E-05	1/°C	ASTM E 831
CTE, 23°C to 80°C, flow	7.48E-05	1/°C	ISO 11359-2
CTE, 23°C to 80°C, xflow	7.64E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	pass	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	138	°C	ISO 306
Vicat Softening Temp, Rate B/120	139	°C	ISO 306
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	116	°C	ISO 75/Af
Relative Temp Index, Elec	130	°C	UL 746B
Relative Temp Index, Mech w/o impact	130	°C	UL 746B
PHYSICAL			
Specific Gravity	1.19	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm (5)	0.4 - 0.8	%	SABIC Method
Mold Shrinkage, xflow, 3.2 mm (5)	0.4 - 0.8	%	SABIC Method
Melt Flow Rate, 300°C/1.2 kgf	20	g/10 min	ASTM D 1238
Density	1.19	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.12	%	ISO 62



Lexan* Resin EXL1162T

Asia Pacific: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
PHYSICAL			
Moisture Absorption (23°C / 50% RH)	0.09	%	ISO 62
Melt Volume Rate, MVR at 300°C/1.2 kg	19	cm ³ /10 min	ISO 1133
OPTICAL			
Light Transmission, 2.54 mm	82	%	ASTM D 1003
Haze, 2.54 mm	3	%	ASTM D 1003
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	ASTM D 257
Surface Resistivity	>1.E+15	Ohm	ASTM D 257
FLAME CHARACTERISTICS			
UL Recognized, 94HB Flame Class Rating (3)	1.5	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	3	mm	IEC 60695-2-12
Glow Wire Ignitability Temperature, 0.8 mm	850	°C	IEC 60695-2-13
Glow Wire Ignitability Temperature, 3.0 mm	850	°C	IEC 60695-2-13



Lexan* Resin EXL1162T

Asia Pacific: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
Injection Molding		
Drying Temperature	120	°C
Drying Time	3 - 4	hrs
Drying Time (Cumulative)	48	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	295 - 315	°C
Nozzle Temperature	290 - 310	°C
Front - Zone 3 Temperature	295 - 315	°C
Middle - Zone 2 Temperature	280 - 305	°C
Rear - Zone 1 Temperature	215 - 295	°C
Mold Temperature	70 - 95	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 70	rpm
Shot to Cylinder Size	40 - 60	%
Vent Depth	0.025 - 0.076	mm

• NOTE: Back Pressure, Screw Speed, Shot to Cylinder Size and Vent Depth are only mentioned as general guidelines. These may not apply or need adjustment in specific situations such as low shot sizes, thin wall molding and gas-assist molding.



Lexan* Resin EXL1162T

Asia Pacific: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

Lexan* EXL1162T

Melt Temperature : 305°C

Mold Temperature : 85°C

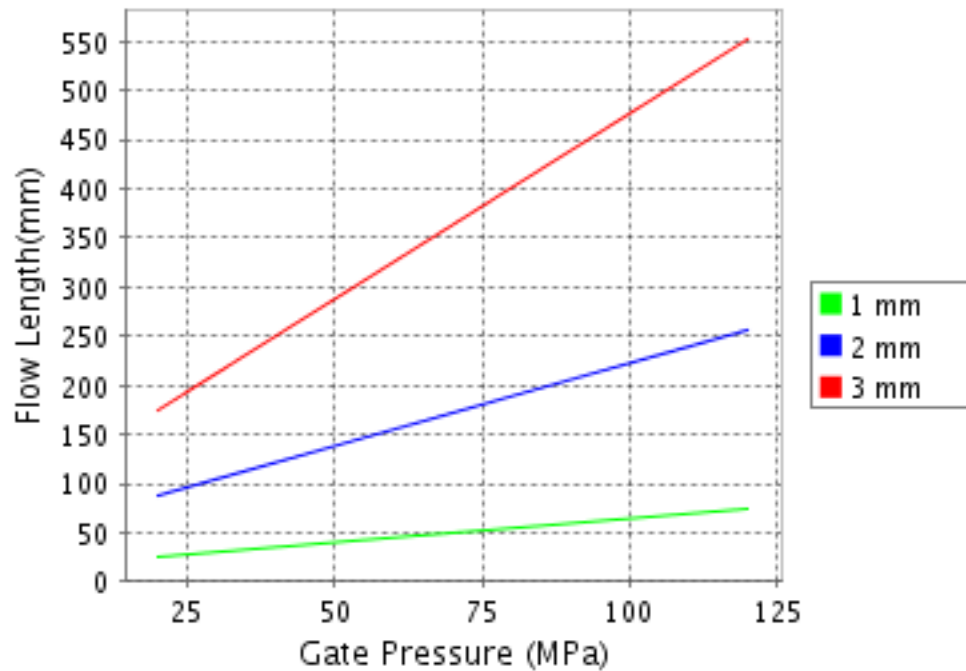

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

© Moldflow is a registered trademark of the Moldflow Corporation.