

Grivory HTV-5H1 black 9205


PA6T/6I-GF50

EMS-GRIVORY | a unit of EMS-CHEMIE AG


机械性能	干 / 湿	单位	测试标准
拉伸模量	18000 / 17500	MPa	ISO 527-1/-2
无缺口简支梁冲击强度 (+23°C)	80 / 80	kJ/m ²	ISO 179/1eU
简支梁冲击强度 (-30°C)	80 / 80	kJ/m ²	ISO 179/1eU
简支梁缺口冲击强度 (+23°C)	11 / 11	kJ/m ²	ISO 179/1eA
简支梁缺口冲击强度 (-30°C)	10 / 10	kJ/m ²	ISO 179/1eA
热性能	干 / 湿	单位	测试标准
熔融温度 (10°C/min)	325 / -	°C	ISO 11357-1/-3
热变形温度 (1.80 MPa)	285 / -	°C	ISO 75-1/-2
热变形温度 (8.00 MPa)	210 / -	°C	ISO 75-1/-2
线性热膨胀系数 (平行)	15 / -	E-6/K	ISO 11359-1/-2
线性热膨胀系数 (垂直)	40 / -	E-6/K	ISO 11359-1/-2
厚度为h时的燃烧性	HB / -	class	IEC 60695-11-10
测试用试样的厚度	0.8 / -	mm	IEC 60695-11-10
电气性能	干 / 湿	单位	测试标准
体积电阻率	1E11 / 1E11	Ohm*m	IEC 60093
表面电阻率	- / 1E12	Ohm	IEC 60093
电介质强度	30 / 30	kV/mm	IEC 60243-1
相对漏电起痕指数	- / 600	-	IEC 60112
其它性能	干 / 湿	单位	测试标准
吸水性	3 / -	%	类似ISO 62
吸湿性	1.3 / -	%	类似ISO 62
密度	1650 / -	kg/m ³	ISO 1183
流变性能	干 / 湿	单位	测试标准
模塑收缩率 (平行)	0.1 / -	%	ISO 294-4, 2577
模塑收缩率 (垂直)	0.5 / -	%	ISO 294-4, 2577

函数


粘度 - 剪切速度

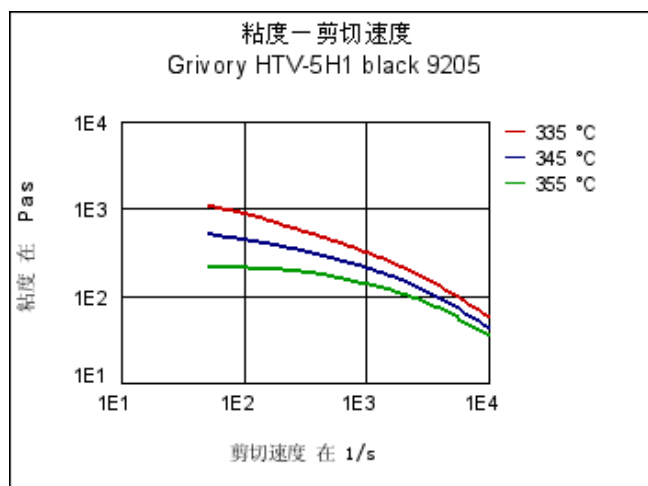


剪切应力 - 剪切速度

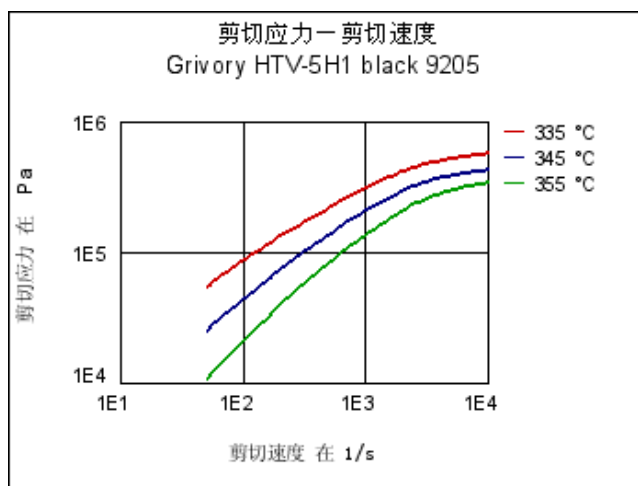


动态剪切模量 - 温度

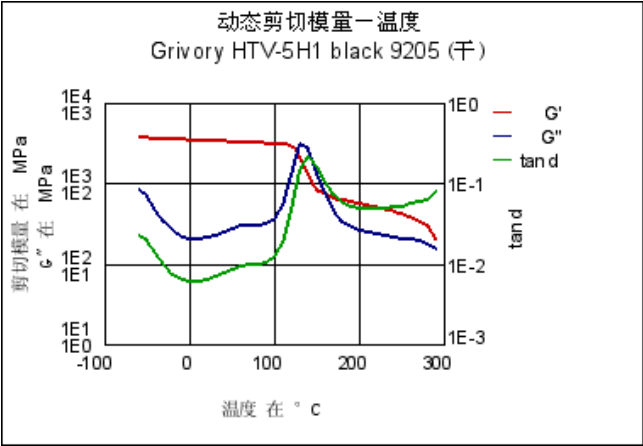


动态剪切模量 - 温度

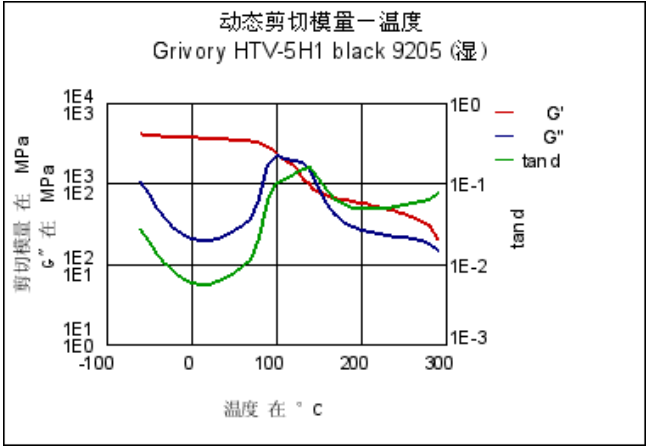


应力 - 应变.

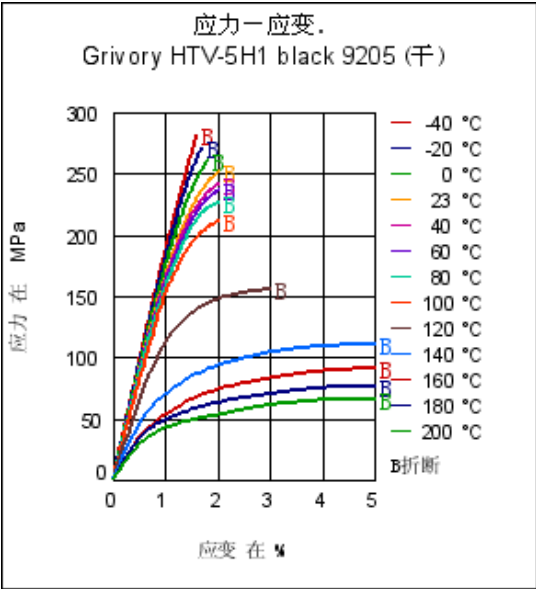


应力 - 应变.

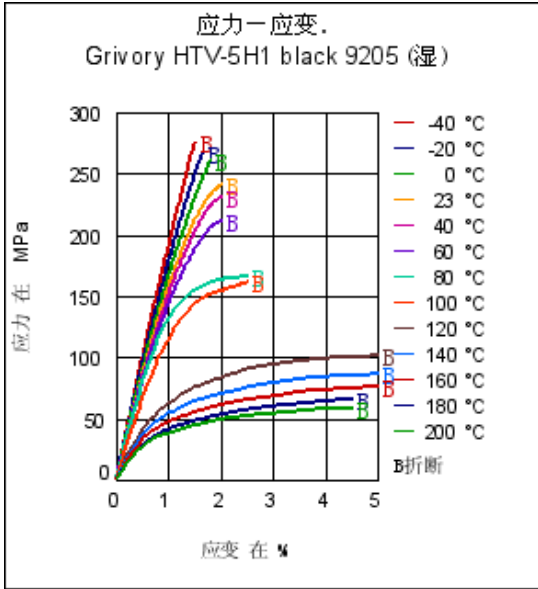


正割模量 - 应变.

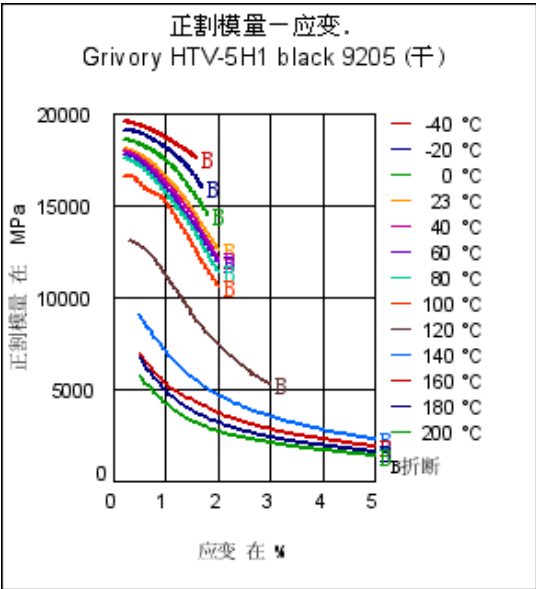


正割模量 - 应变.

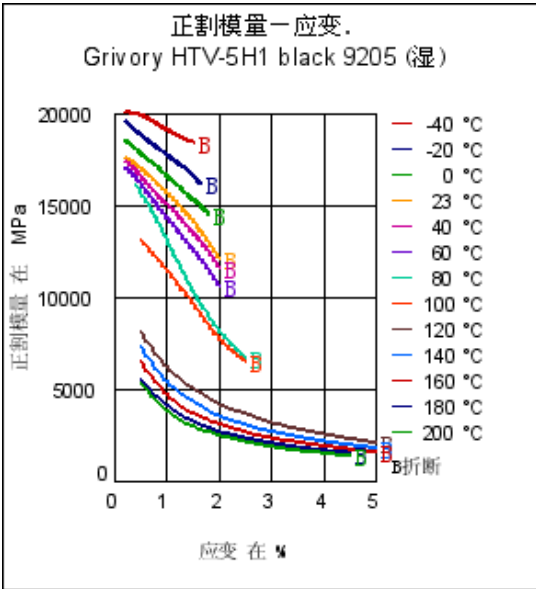


应力 - 应变(等时的) 23 °C

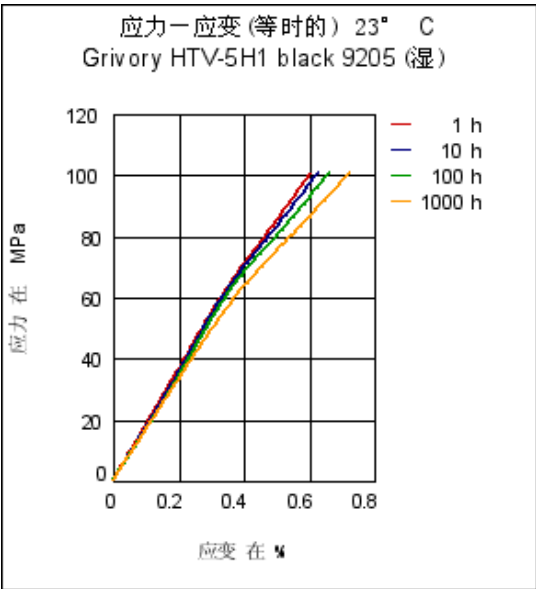


蠕变曲线 °C

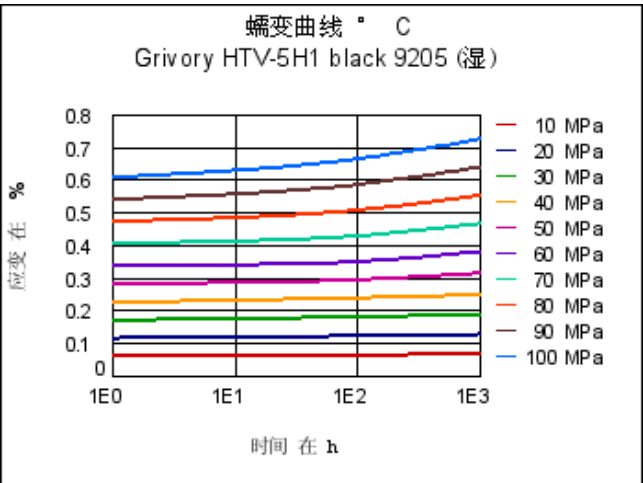


蠕变曲线 °C

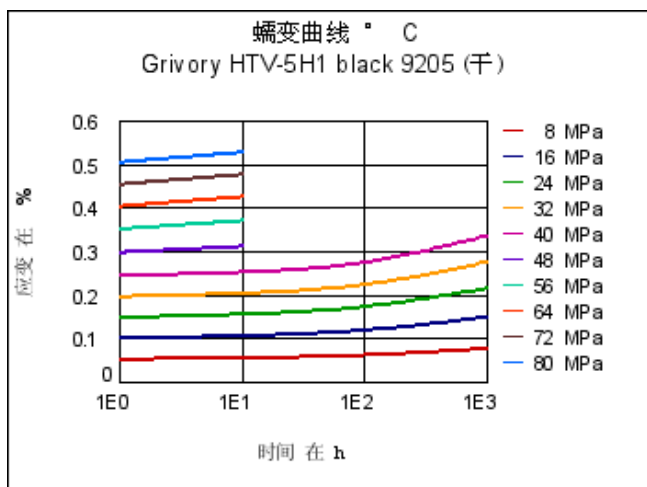


蠕变模量 - 时间. 23°C

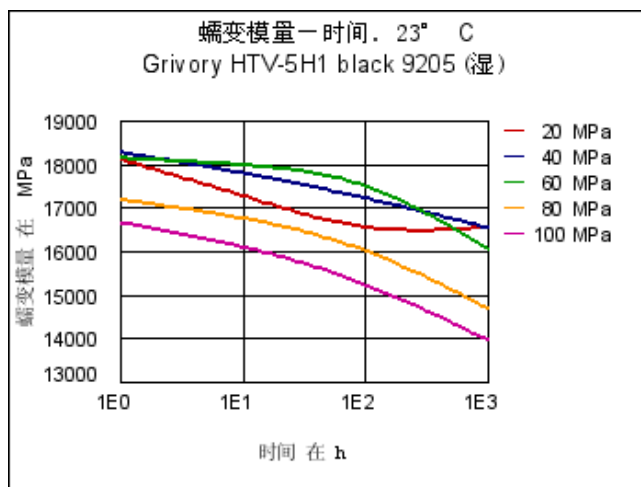


应力 - 应变(等时的) 80°C

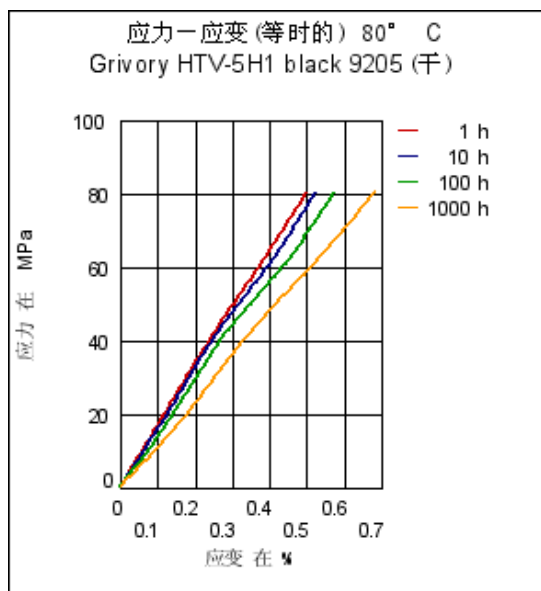


蠕变模量 - 时间. 80°C

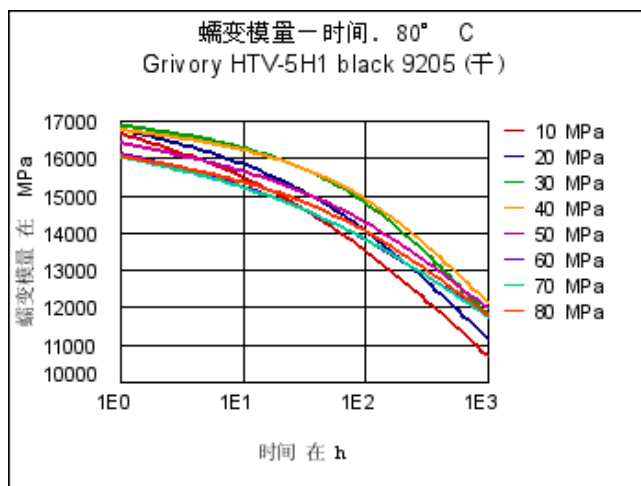

比容 - 温度(pvT)

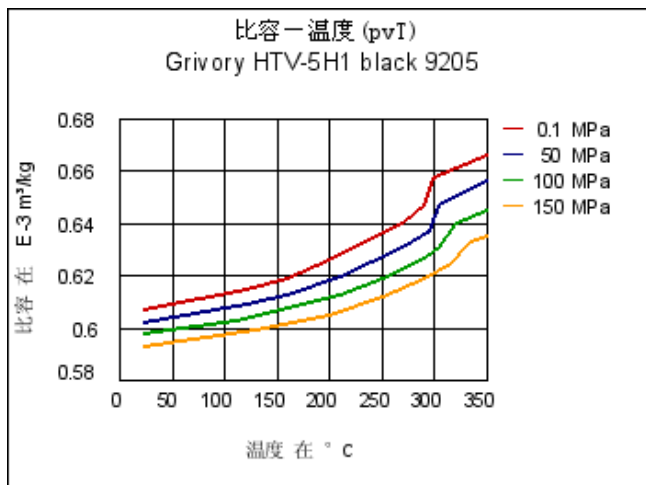

拉伸模量 - 温度

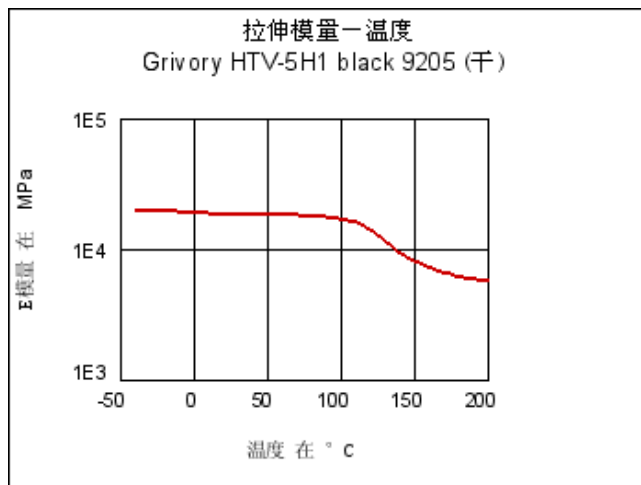

典型数据

加工方法

注塑

供货形式

切粒

特殊性能

较高的耐紫外线 (户外使用), 较高的耐热性

供应地区

北美, 欧洲, 亚太, 中南美洲, 中东/非洲

耐化学性

酸类

- 😊 醋酸 (5g/100g) (23 $^{\circ}\text{C}$)
- 😊 柠檬酸溶液 (10g/100g) (23 $^{\circ}\text{C}$)
- 😊 乳酸 (10g/100g) (23 $^{\circ}\text{C}$)
- 🚫 盐酸 (36g/100g) (23 $^{\circ}\text{C}$)
- 🚫 硝酸 (40g/100g) (23 $^{\circ}\text{C}$)
- 🚫 硫酸 (38g/100g) (23 $^{\circ}\text{C}$)
- 😊 硫酸 (5g/100g) (23 $^{\circ}\text{C}$)
- 🚫 铬酸溶液 (40g/100g) (23 $^{\circ}\text{C}$)

碱类

- 😊 氢氧化钠溶液 (35g/100g) (23 $^{\circ}\text{C}$)
- 😊 氢氧化钠溶液 (1g/100g) (23 $^{\circ}\text{C}$)
- 😊 氨水(氢氧化铵) (10g/100g) (23 $^{\circ}\text{C}$)

醇类

- 😊 异丙醇 (23 $^{\circ}\text{C}$)

汽车

油路系统, 动力系统及车身底盘, 内饰, 外饰

电子电器

电器设施, 供电系统

工业及消费品

家庭用品, 液压及气动, 机械工程, 传动装置, 体育及消费品, 工具及零件

 甲醇 (23°C) 乙醇 (23°C)**碳氢化合物** 正乙烷 (23°C) 甲苯 (23°C) 异辛烷 (23°C)**酮类** 丙酮 (23°C)**醚类** 乙醚 (23°C)**矿物油** SAE 10W40号多效润滑油 (23°C) SAE 10W40号多效润滑油 (130°C) SAE 89/90号变速箱润滑油 (130°C) 绝缘油 (23°C)**标准燃油** ISO 1817 燃油1号 (60°C) ISO 1817 燃油2号 (60°C) ISO 1817 燃油3号 (60°C) ISO 1817 燃油4号 (60°C) 不含酒精的标准燃油(优先使用C类ISO 1817 燃油) (23°C) 含酒精的标准燃油(优先使用4号ISO 1817 燃油) (23°C) 柴油(优先使用F类ISO 1817液体) (23°C) 柴油(优先使用F类ISO 1817液体) (90°C) 柴油(优先使用F类ISO 1817液体) (>90°C)**盐溶液** 氯化钠溶液(10g/100g) (23°C) 次氯化钠溶液 (10g/100g) (23°C) 碳酸钠溶液 (20g/100g) (23°C) 碳酸钠溶液 (2g/100g) (23°C) 氯化锌溶液 (50g/100g) (23°C)**其它** 乙酸乙酯 (23°C) 过氧化氢 (23°C) DOT4号刹车油 (130°C) 乙二醇水溶液 (50g/100g) (108°C) 1g/100g 基苯氧- 聚环氧乙烷乙烯水溶液 (23°C) 油酸 (50g/100g) + 橄榄油 (50g/100g) (23°C) 水 (23°C) 去离子水 (90°C) 酚溶液(5g/100g) (23°C)