

Technical Data Sheet

Diamaloy Engineered Alloys ABS NYLON 4010A

Acrylonitrile Butadiene Styrene + PA
 LyondellBasell Industries
 Engineering Plastics

General			
Features	<ul style="list-style-type: none"> • Good Weather Resistance 		
Agency Ratings	<ul style="list-style-type: none"> • EC 1907/2006 (REACH) 	<ul style="list-style-type: none"> • EU 2002/96/EC (WEEE) 	
RoHS Compliance	<ul style="list-style-type: none"> • RoHS Compliant 		
Forms	<ul style="list-style-type: none"> • Pellets 		
Processing Method	<ul style="list-style-type: none"> • Injection Molding 		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.09	1.09 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) ¹ (265°C/5.0 Kg)	37 g/10 min	37 g/10 min	ASTM D1238

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength			ASTM D638
Yield, 73°F (23°C), 0.125 In (3.18 Mm), Injection Molded ^{2,3}	6320 psi	43.6 MPa	
Yield, 73°F (23°C), 0.125 In (3.18 Mm), Injection Molded ^{2,4}	6120 psi	42.2 MPa	
Break, 73°F (23°C), 0.125 In (3.18 Mm), Injection Molded ^{5,6}	5720 psi	39.4 MPa	
Break, 73°F (23°C), 0.125 In (3.18 Mm), Injection Molded ^{5,7}	5200 psi	35.9 MPa	
Tensile Elongation ⁵			ASTM D638
Yield, 73°F (23°C), 0.125 In (3.18 Mm), Injection Molded ⁶	3.6 %	3.6 %	
Yield, 73°F (23°C), 0.125 In (3.18 Mm), Injection Molded ⁷	3.7 %	3.7 %	
Break, 73°F (23°C), 0.125 In (3.18 Mm), Injection Molded ⁶	200 %	200 %	
Break, 73°F (23°C), 0.125 In (3.18 Mm), Injection Molded ⁷	15 %	15 %	
Flexural Modulus - Tangent ⁸			ASTM D790B
73°F (23°C), 0.125 In (3.18 Mm), Injection Molded, 2.00 In (50.8 Mm) Span	214000 psi	1480 MPa	


Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact			ASTM D256A
73°F (23°C), 0.125 In (3.18 Mm), Injection Molded	No Break	No Break	

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
264 Psi (1.8 Mpa), Unannealed, 0.125 In (3.18 Mm), Injection Molded	127 °F	52.8 °C	
Vicat Softening Temperature	289 °F	143 °C	ASTM D1525 ⁹

Technical Data Sheet

Diamaloy Engineered Alloys ABS NYLON 4010A

Acrylonitrile Butadiene Styrene + PA
 LyondellBasell Industries
 Engineering Plastics

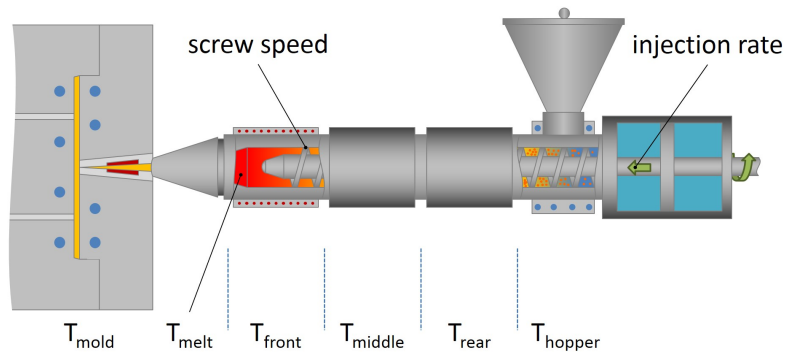

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 to 185 °F	80 to 85 °C
Drying Time	4.0 to 6.0 hr	4.0 to 6.0 hr
Suggested Max Moisture	0.10 %	0.10 %
Suggested Shot Size	40 to 70 %	40 to 70 %
Rear Temperature	446 to 500 °F	230 to 260 °C
Middle Temperature	450 to 500 °F	232 to 260 °C
Front Temperature	455 to 500 °F	235 to 260 °C
Nozzle Temperature	428 to 500 °F	220 to 260 °C
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	160 to 180 °F	71 to 82 °C
Injection Rate	Fast	Fast
Back Pressure	75.0 to 150 psi	0.517 to 1.03 MPa

Notes

- ¹ Procedure A
- ² Type I, 2.0 in/min (51 mm/min)
- ³ Single Gated
- ⁴ Double Gated
- ⁵ 2.0 in/min (51 mm/min)
- ⁶ single gate
- ⁷ double gate
- ⁸ Method I (3 point load), 0.050 in/min (1.3 mm/min)
- ⁹ Rate B (120°C/h), Loading 1 (10 N)

Notes

These are typical property values not to be construed as specification limits.