

Technical Data Sheet

Schulablend (ABS/PA) M/MK 5501 U

Acrylonitrile Butadiene Styrene + PA
LyondellBasell Industries
Engineering Plastics

Product Description

Medium flow ABS/PA6 blend, high impact strength, UV stabilised. (Former name: SCHULABLEND® M/MK UV HI)

General

Processing Method	• Injection Molding
Resin ID (ISO 1043)	• PA+ABS

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.10 g/cm ³	1.10 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (260°C/5.0 Kg)	8.0 cm ³ /10min	8.0 cm ³ /10min	ISO 1133

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	261000 psi	1800 MPa	ISO 527-1/1A/1
Tensile Stress			ISO 527-2/1A/50
Yield	5950 psi	41.0 MPa	
Break	5800 psi	40.0 MPa	
Tensile Strain			ISO 527-2/1A/50
Yield	4.0 %	4.0 %	
Break	98 %	98 %	
Flexural Modulus ¹	268000 psi	1850 MPa	ISO 178
Flexural Stress ¹ (3.5% Strain)	8270 psi	57.0 MPa	ISO 178

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	7.6 ft-lb/in ²	16 kJ/m ²	
73°F (23°C)	29 ft-lb/in ²	60 kJ/m ²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	No Break	No Break	
73°F (23°C)	No Break	No Break	

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ISO 75-2/Af
264 Psi (1.8 Mpa), Unannealed	147 °F	64.0 °C	
Vicat Softening Temperature	282 °F	139 °C	ISO 306/B50

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	1.1 in/min	29 mm/min	ISO 3795
0.0787 In (2.00 Mm)	1.1 in/min	29 mm/min	FMVSS 302

Additional Information


The tradename "Schulablend" may be abbreviated "SBL" in documents or on labels.

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

Schulablend (ABS/PA) M/MK 5501 U

Acrylonitrile Butadiene Styrene + PA
 LyondellBasell Industries
 Engineering Plastics

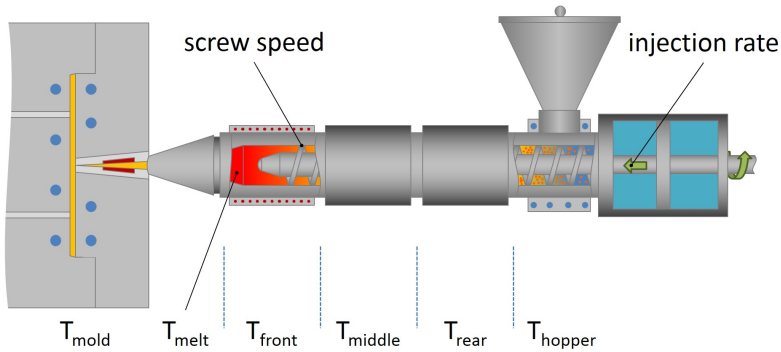

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	4.0 hr	4.0 hr
Processing (Melt) Temp	446 to 518 °F	230 to 270 °C
Mold Temperature	104 to 176 °F	40 to 80 °C

Notes

¹ 0.079 in/min (2.0 mm/min)

Notes

These are typical property values not to be construed as specification limits.