

Technical Data Sheet

**Icorene N1015**

Ethylene Vinyl Acetate Copolymer

LyondellBasell Industries

Custom Powders

Product Description

ICORENE® N1015 is a premium copolymer of ethylene vinyl acetate specifically designed for the preparation of masterbatch. The powder form can achieve better colour developments or additive dispersion in a masterbatch than the pellet form.

The vinyl acetate content is about 19%.

This grade can be used in various applications such as hot melt adhesives with a maximum processing temperature of 200°C.

General


Additive	• Heat Stabilizer		
Features	• Copolymer • Dispersible	• Food Contact Acceptable • Good Colorability	• Heat Stabilized
Uses	• Adhesives	• Masterbatch	
Agency Ratings	• EU Food Contact	• FDA Food Contact	
Forms	• Powder		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	0.941 g/cm ³	0.941 g/cm ³	Internal Method
Melt Mass-Flow Rate (MFR) (190°C/2.16 Kg)	150 g/10 min	150 g/10 min	ASTM D1238
Vinyl Acetate Content	19.0 wt%	19.0 wt%	Internal Method
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Continuous Use Temperature	< 392 °F	< 200 °C	
Peak Melting Temperature	178 °F	81.0 °C	ASTM D3418

Technical Data Sheet

Icorene N1015

Ethylene Vinyl Acetate Copolymer
LyondellBasell Industries
Custom Powders

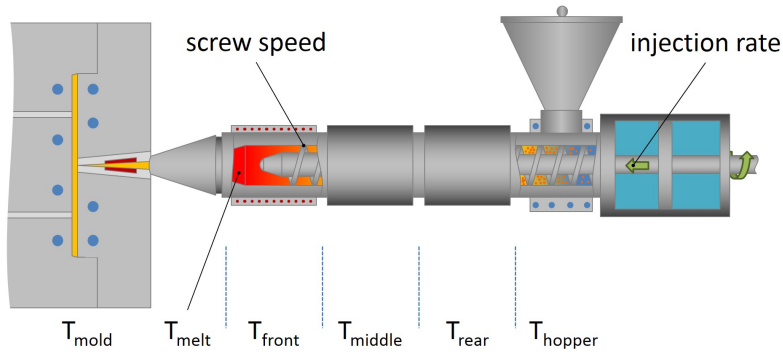

Injection	Nominal Value (English)	Nominal Value (SI)
Processing (Melt) Temp	< 392 °F	< 200 °C

Notes

These are typical property values not to be construed as specification limits.