

## Technical Data Sheet

### *Diamaloy* ABSPC 9901 50587GRY



Polycarbonate + ABS

#### Product Description


*Diamaloy* ABSPC 9901 50587GRY is a Polycarbonate + ABS material and is typically used in Injection Molding applications. Features include: Ultra High Impact Resistance.

#### Regulatory Status

For regulatory compliance information, see ABSPC 9901 50587GRY [Product Stewardship Bulletin \(PSB\)](#) and [Safety Data Sheet \(SDS\)](#).

<b>Status</b>	Commercial: Active
<b>Availability</b>	North America
<b>Processing Method</b>	Injection Molding
<b>Attribute</b>	Ultra High Impact Resistance

Typical Properties	Nominal Value	Units	Test Method
<b>Physical</b>			
Melt Flow Rate			
(200 °C/5.0 kg, Procedure A)	0.80	g/10 min	ASTM D1238
(230 °C/3.8 kg, Procedure A)	3.9	g/10 min	ASTM D1238
Density - Specific Gravity	1.12	g/cm <sup>3</sup>	ASTM D792
<b>Mechanical</b>			
Tensile Strength at Yield, (51 mm/min)	55.2	MPa	ASTM D638
Flexural Modulus	2140	MPa	ASTM D790
Tensile Modulus, (Injection Molded, Type I)	2670	MPa	ASTM D638
Flexural Strength at Break, (Method I (3 point load), Procedure A, Type I)	70.7	MPa	ASTM D790
<b>Impact</b>			
Notched Izod Impact, (23 °C, 3.18 mm)	590	J/m	ASTM D256
<b>Hardness</b>			
Rockwell Hardness, (R-Scale)	112		ASTM D785
<b>Thermal</b>			
Vicat Softening Temperature, (Loading 1 (10 N))	125	°C	ASTM D1525
Deflection Temperature Under Load Annealed (264 psi), (3.18 mm)	100	°C	ASTM D648
Deflection Temperature Under Load Unannealed (264 psi), (3.18 mm)	90.0	°C	ASTM D648
<b>UL Information</b>			
Flame Rating, (1.5 mm)	HB		UL 94
UL File Number	E119088		

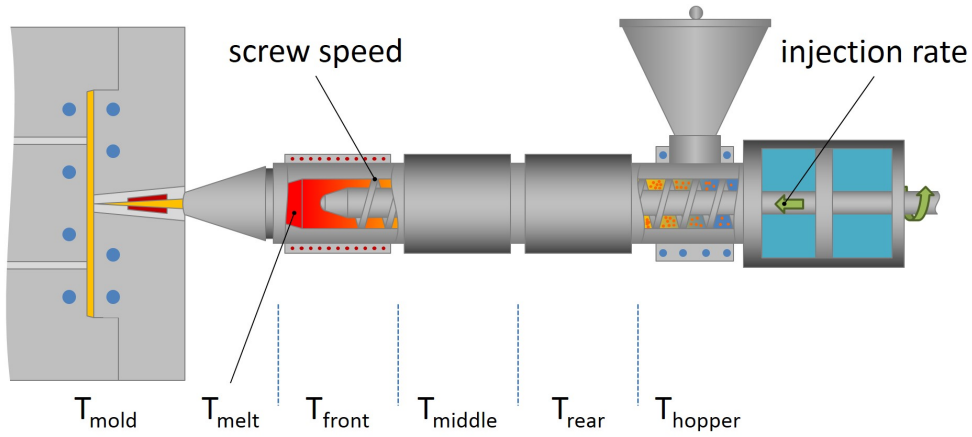

<b>Injection Parameters</b>	<b>Nominal Value</b>	<b>Units</b>
Drying Time	2.0 to 4.0	hr
Drying Temperature	90 to 100	°C
Suggested Max Moisture	0.02	%
Nozzle Temperature	238 to 272	°C
Processing (Melt) Temp	238 to 272	°C
Front Temperature	238 to 272	°C
Suggested Shot Size	40 to 70	%
Middle Temperature	235 to 265	°C
Rear Temperature	230 to 260	°C
Back Pressure	0.345 to 1.03	MPa
Mold Temperature	40 to 100	°C

## Notes

These are typical property values not to be construed as specification limits.

## Processing Techniques

Specific recommendations for resin type and processing conditions can only be made when the end use, required properties and fabrication equipment are known.

## Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2018

## Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

## Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family of companies.