

Technical Data Sheet  
**POLYFLAM<sup>®</sup> RMMB**  
**40300**

Polycarbonate + ABS  
 Engineering Plastics




Product Description			
Flame retardant ABS/PC blend; halogen free according to DIN VDE 0472 part 815			
General			
Features	<ul style="list-style-type: none"> <li>Flame Retardant</li> <li>Good Flow</li> </ul>	<ul style="list-style-type: none"> <li>Good Processability</li> <li>Halogen Free</li> </ul>	
Processing Method	<ul style="list-style-type: none"> <li>Injection Molding</li> </ul>		
Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.17 g/cm <sup>3</sup>	1.17 g/cm <sup>3</sup>	ISO 1183/A
Melt Volume-Flow Rate (MVR) (260°C/5.0 kg)	60 cm <sup>3</sup> /10min	60 cm <sup>3</sup> /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	406000 psi	2800 MPa	ISO 527-2/1A/1
Tensile Stress (Yield)	9140 psi	63.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	4.0 %	4.0 %	ISO 527-2/1A/50
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	5.7 ft·lb/in <sup>2</sup>	12 kJ/m <sup>2</sup>	
73°F (23°C)	8.6 ft·lb/in <sup>2</sup>	18 kJ/m <sup>2</sup>	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	No Break	No Break	
73°F (23°C)	No Break	No Break	
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Heat Deflection Temperature			
66 psi (0.45 MPa), Unannealed	244 °F	118 °C	ISO 75-2/Bf
264 psi (1.8 MPa), Unannealed	183 °F	84.0 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	221 °F	105 °C	ISO 306/A50
--	212 °F	100 °C	ISO 306/B50
Ball Pressure Test (194°F (90°C))	Pass	Pass	IEC 60695-10-2
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index	575 V	575 V	IEC 60112
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			ISO 3795
0.0591 in (1.50 mm), Self-Extinguishing	0.0 in/min	0.0 mm/min	
0.118 in (3.00 mm), Self-Extinguishing	0.0 in/min	0.0 mm/min	
Flame Rating			UL 94
0.06 in (1.5 mm)	V-0	V-0	IEC 60695-11-10, -20
0.12 in (3.0 mm)	V-0	V-0	
Glow Wire Flammability Index			IEC 60695-2-12
0.06 in (1.5 mm)	1760 °F	960 °C	
0.12 in (3.0 mm)	1760 °F	960 °C	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.06 in (1.5 mm)	1430 °F	775 °C	
0.12 in (3.0 mm)	1430 °F	775 °C	
Oxygen Index	29 %	29 %	ISO 4589-2



Technical Data Sheet  
**POLYFLAM<sup>®</sup> RMMB**  
**40300**

Polycarbonate + ABS  
 Engineering Plastics

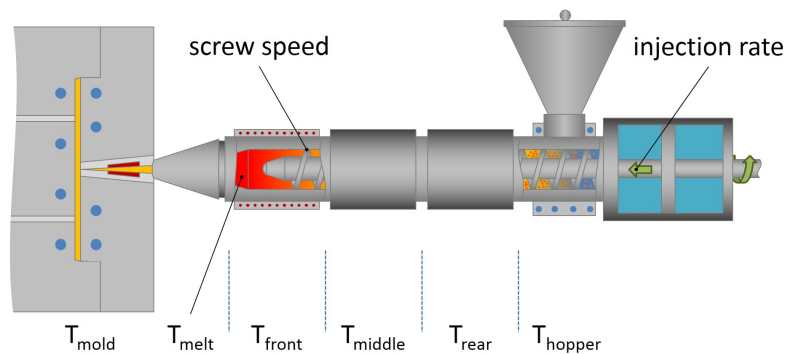

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 to 212 °F	80 to 100 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Suggested Max Moisture	0.02 %	0.02 %
Suggested Max Regrind	25 %	25 %
Processing (Melt) Temp	482 to 536 °F	250 to 280 °C
Mold Temperature	140 to 176 °F	60 to 80 °C
Injection Rate	Slow-Moderate	Slow-Moderate
Back Pressure	725 to 1450 psi	5.00 to 10.0 MPa
Screw Speed	< 709 in/min	< 18 m/min

**Notes**

These are typical property values not to be construed as specification limits.