

Technical Data Sheet

Schulablend (PC/ABS) M/MB 6103 GF20 U

Polycarbonate + ABS
LyondellBasell Industries
Engineering Plastics

Product Description

20% glass fibre reinforced ABS/PC blend. (Former name: SCHULABLEND® M/MB 5 GF20)

General

Filler / Reinforcement	• Glass Fiber, 20% Filler by Weight
Processing Method	• Injection Molding
Resin ID (ISO 1043)	• ABS+PC-GF

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.26 g/cm ³	1.26 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (260°C/5.0 Kg)	35 cm ³ /10min	35 cm ³ /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	870000 psi	6000 MPa	ISO 527-1/1A/1
Tensile Stress (Break)	11600 psi	80.0 MPa	ISO 527-2/1A/5
Tensile Strain (Break)	2.0 %	2.0 %	ISO 527-2/1A/5
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	3.3 ft·lb/in ²	7.0 kJ/m ²	
73°F (23°C)	4.3 ft·lb/in ²	9.0 kJ/m ²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	14 ft·lb/in ²	30 kJ/m ²	
73°F (23°C)	13 ft·lb/in ²	28 kJ/m ²	
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Ball Indentation Hardness (H 358/30)	21300 psi	147 MPa	ISO 2039-1
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	270 °F	132 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	250 °F	121 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	270 °F	132 °C	ISO 306/B50
--	288 °F	142 °C	ISO 306/A50
Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	1.6 in/min	40 mm/min	ISO 3795
0.0787 In (2.00 Mm)	1.6 in/min	40 mm/min	FMVSS 302

Additional Information


The tradename "Schulablend" may be abbreviated "SBL" in documents or on labels.

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

Schulablend (PC/ABS) M/MB 6103 GF20 U

Polycarbonate + ABS
 LyondellBasell Industries
 Engineering Plastics

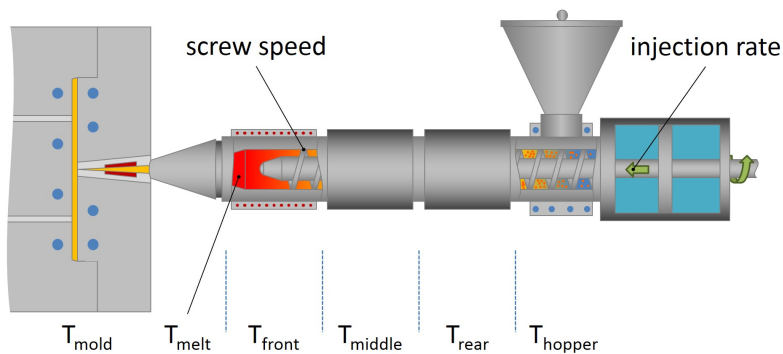

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	212 °F	100 °C
Drying Time	4.0 hr	4.0 hr
Suggested Max Moisture	0.02 %	0.02 %
Processing (Melt) Temp	500 to 536 °F	260 to 280 °C
Mold Temperature	158 to 212 °F	70 to 100 °C

Notes

These are typical property values not to be construed as specification limits.