

## Technical Data Sheet

**Schulblend M/MB 6305 SF U GRY68280**

Polycarbonate + ABS

**Product Description**

High flow and high heat resistant PC/ABS blend. Available with or without UV stabilization. (Former name: SCHULABLEND M/MB 6 SF)


**Regulatory Status**

For regulatory compliance information, see *Schulblend M/MB 6305 SF U GRY68280* [Product Stewardship Bulletin \(PSB\)](#) and [Safety Data Sheet \(SDS\)](#).

<b>Status</b>	Commercial: Active
<b>Availability</b>	Africa-Middle East; Asia-Pacific; Europe; Latin America; North America
<b>Processing Method</b>	Injection Molding
<b>Attribute</b>	Good Flow; High Heat Resistance
<b>Resin ID</b>	ABS+PC

Typical Properties	Nominal Value	Units	Test Method
<b>Physical</b>			
Melt Volume Flow Rate, (260 °C/5.0 kg)	27	cm <sup>3</sup> /10 min	ISO 1133
Density, (Method A)	1.16	g/cm <sup>3</sup>	ISO 1183
<b>Mechanical</b>			
Tensile Stress at Yield, (Type 1A, 50 mm/min)	55.0	MPa	ISO 527-2
Tensile Strain at Yield, (Type 1A, 50 mm/min)	6.0	%	ISO 527-2
Tensile Modulus, (1 mm/min, Type 1A)	2200	MPa	ISO 527-1
<b>Impact</b>			
Charpy Impact Strength - Notched, (23 °C, Type 1, Edgewise, Notch A)	55	kJ/m <sup>2</sup>	ISO 179
Charpy Impact Strength - Unnotched			
(23 °C, Type 1, Edgewise)	No Break		ISO 179
(-30 °C, Type 1, Edgewise)	No Break		ISO 179
<b>Hardness</b>			
Ball Indentation Hardness, (H 358/30)	102	MPa	ISO 2039-1
Ball Pressure Test, (130 °C)	Pass		IEC 60695-10-2
<b>Thermal</b>			
Vicat Softening Temperature, (B (50N), 50 °C/h)	135	°C	ISO 306
<b>Electrical</b>			
Volume Resistivity	>1.0E+13	ohm*m	IEC 62631-3-1
Surface Resistivity	>1.0E+15	ohm	IEC 60093
<b>Flammable</b>			
Burning Rate			
(2.00 mm)	60	mm/min	FMVSS 302
(2.00 mm)	60	mm/min	ISO 3795
Glow Wire Flammability Index, (2.0 mm)	650	°C	IEC 60695-2-12
<b>UL Information</b>			

Flammability Classification		
(1.5 mm)	HB	IEC 60695-11-10, -20
(3.0 mm)	HB	IEC 60695-11-10, -20
UL File Number	E86615	

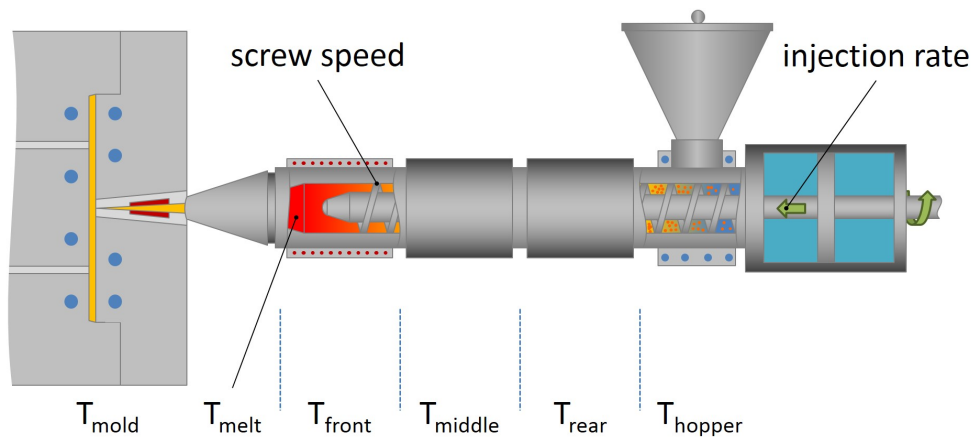

Injection Parameters	Nominal Value	Units
Drying Time	4	hr
Drying Temperature	100 to 110	°C
Processing (Melt) Temp	260 to 280	°C
Mold Temperature	70 to 100	°C

## Notes

These are typical property values not to be construed as specification limits.

## Processing Techniques

Specific recommendations for resin type and processing conditions can only be made when the end use, required properties and fabrication equipment are known.

## Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2018

## Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

## Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family of companies.