

Technical Data Sheet
FERREX® GPP35CF UL
 Polypropylene
 Engineering Plastics



General			
Filler / Reinforcement	• Calcium Carbonate, 36% Filler by Weight		
Features	• Good Processability • High Gloss	• Homopolymer • Low Shrinkage	
Uses	• Appliances	• Electrical Housing	• Housings
Forms	• Pellets		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.24	1.24 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 kg)	22 g/10 min	22 g/10 min	ASTM D1238
Molding Shrinkage - Flow	0.011 to 0.014 in/in	1.1 to 1.4 %	ASTM D955


Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Yield)	3300 psi	22.8 MPa	ASTM D638
Tensile Elongation (Break)	25 %	25 %	ASTM D638
Flexural Modulus	320000 psi	2210 MPa	ASTM D790
Flexural Strength (Yield)	5400 psi	37.2 MPa	ASTM D790

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (73°F (23°C))	0.60 ft·lb/in	32 J/m	ASTM D256
Unnotched Izod Impact (73°F (23°C))	21 ft·lb/in	1100 J/m	ASTM D256
Gardner Impact (0.125 in (3.18 mm))	130 in·lb	14.7 J	ASTM D3029

Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Durometer Hardness (Shore D)	74	74	ASTM D2240

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 psi (0.45 MPa), Unannealed	210 °F	98.9 °C	
264 psi (1.8 MPa), Unannealed	130 °F	54.4 °C	

Technical Data Sheet
FERREX[®] GPP35CF UL
 Polypropylene
 Engineering Plastics

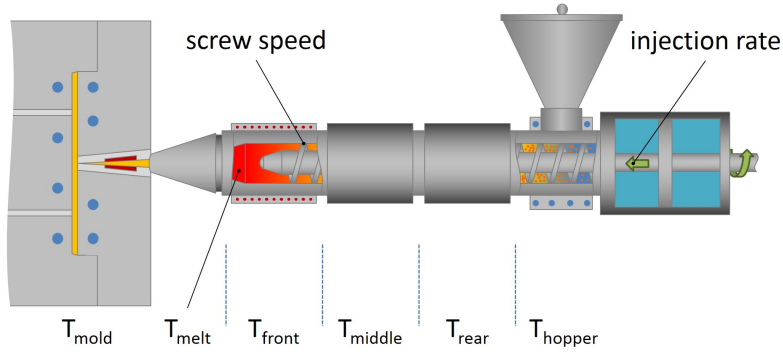

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	200 °F	93 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Rear Temperature	390 to 400 °F	199 to 204 °C
Middle Temperature	400 to 410 °F	204 to 210 °C
Front Temperature	410 to 420 °F	210 to 216 °C
Nozzle Temperature	420 to 430 °F	216 to 221 °C
Mold Temperature	115 to 140 °F	46 to 60 °C
Back Pressure	20.0 to 50.0 psi	0.138 to 0.345 MPa
Screw Speed	100 to 150 rpm	100 to 150 rpm
Clamp Tonnage	2.0 to 3.0 tons/in ²	2.8 to 4.1 kN/cm ²
Screw L/D Ratio	20.0:1.0	20.0:1.0
Screw Compression Ratio	2.0:1.0	2.0:1.0

Notes

These are typical property values not to be construed as specification limits.