

Technical Data Sheet

Polyflam RIPP 2000 HI

Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

Product Description

Unfilled flame-retardant PP-Copolymer grade, halogen free acc. DIN VDE 0172 part 815, high impact

General

Features	<ul style="list-style-type: none"> Copolymer Flame Retardant 	<ul style="list-style-type: none"> Good Processability Halogen Free 	<ul style="list-style-type: none"> High Impact Resistance Impact Modified
Processing Method	<ul style="list-style-type: none"> Injection Molding 		
Resin ID (ISO 1043)	<ul style="list-style-type: none"> PP FR(40) 		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
----------	-------------------------	--------------------	-------------

Density	0.910 g/cm ³	0.910 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (230°c/2.16 Kg)	10 cm ³ /10min	10 cm ³ /10min	ISO 1133

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
------------	-------------------------	--------------------	-------------

Tensile Modulus	160000 psi	1100 MPa	ISO 527-1/1A/1
Tensile Stress			ISO 527-2/1A/50
Yield	3340 psi	23.0 MPa	
Break	2610 psi	18.0 MPa	
Tensile Strain (Yield)	10 %	10 %	ISO 527-2/1A/50
Nominal Tensile Strain at Break	300 %	300 %	ISO 527-2/1A/50
Flexural Modulus ¹	160000 psi	1100 MPa	ISO 178
Flexural Stress ¹			ISO 178
6.4% Strain	3920 psi	27.0 MPa	
3.5% Strain	3190 psi	22.0 MPa	

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
--------	-------------------------	--------------------	-------------

Charpy Notched Impact Strength			ISO 179/1eA
-22°f (-30°c)	5.7 ft·lb/in ²	12 kJ/m ²	
73°f (23°c)	5.2 ft·lb/in ²	11 kJ/m ²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°f (-30°c)	38 ft·lb/in ²	80 kJ/m ²	
73°f (23°c)	No Break	No Break	

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
---------	-------------------------	--------------------	-------------

Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	160 °F	71.0 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	113 °F	45.0 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	142 °F	61.0 °C	ISO 306/B50
--	284 °F	140 °C	ISO 306/A50

Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
------------	-------------------------	--------------------	-------------

Comparative Tracking Index	600 V	600 V	IEC 60112
----------------------------	-------	-------	-----------



Technical Data Sheet

Polyflam RIPP 2000 HI


Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Flame Rating			
0.031 In (0.8 Mm)	V-2	V-2	UL 94
0.06 In (1.6 Mm)	V-2	V-2	UL 94 IEC 60695-11-10, -20
0.13 In (3.2 Mm)	V-2	V-2	UL 94 IEC 60695-11-10, -20
0.03 In (0.8 Mm)	V-2	V-2	IEC 60695-11-10, -20
Glow Wire Flammability Index			IEC 60695-2-12
0.030 In (0.75 Mm)	1760 °F	960 °C	
0.06 In (1.5 Mm)	1760 °F	960 °C	
0.08 In (2.0 Mm)	1760 °F	960 °C	
0.12 In (3.0 Mm)	1760 °F	960 °C	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.030 In (0.75 Mm)	1430 °F	775 °C	
0.06 In (1.5 Mm)	1340 °F	725 °C	
0.08 In (2.0 Mm)	1340 °F	725 °C	
0.12 In (3.0 Mm)	1380 °F	750 °C	

Technical Data Sheet

Polyflam RIPP 2000 HI

Polypropylene Copolymer
LyondellBasell Industries
Engineering Plastics

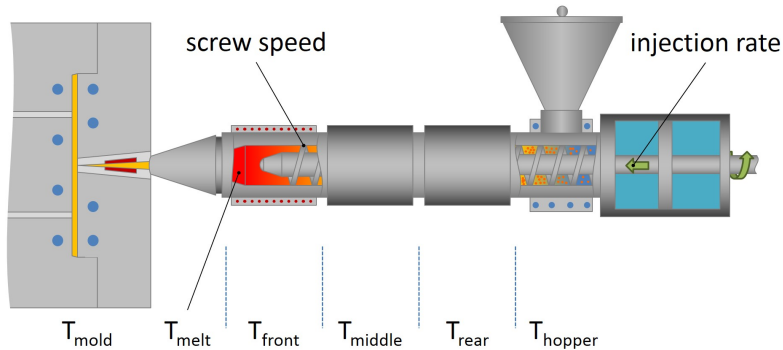

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	158 °F	70 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	356 to 428 °F	180 to 220 °C
Mold Temperature	104 to 176 °F	40 to 80 °C
Injection Pressure	11600 to 17400 psi	80.0 to 120 MPa
Injection Rate	Slow-Moderate	Slow-Moderate
Holding Pressure	5800 to 13100 psi	40.0 to 90.0 MPa
Back Pressure	725 to 1450 psi	5.00 to 10.0 MPa
Screw Speed	< 709 in/min	< 18 m/min

Injection Notes

Predrying

Predrying at 70°C for 2-4 hours is recommended as a precaution.

Reprocessing

Addition of regrind is normally possible, but it must be tested in each case regarding the percentage and requirements of the article. Thermal damage during first processing depends on processing parameters and the geometry of flow path and article.

Shut down

Avoid long melt residence time. Purge with base polymer or with polyolefines.

Finishing

Machining is usually possible.