

Technical Data Sheet
POLYFLAM® RPP 2000 E
 Polypropylene Homopolymer
 Engineering Plastics



Product Description

Flame-retardant PP-Compound; halogen free according to DIN VDE 0472 part 815; for extrusion

General

Features	<ul style="list-style-type: none"> • Flame Retardant • Good Colorability 	<ul style="list-style-type: none"> • Halogen Free • High Viscosity 	<ul style="list-style-type: none"> • Homopolymer
UL File Number	<ul style="list-style-type: none"> • E86615 		
Processing Method	<ul style="list-style-type: none"> • Extrusion 	<ul style="list-style-type: none"> • Injection Molding 	
Resin ID (ISO 1043)	<ul style="list-style-type: none"> • PP FR(40) 		

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
----------	-------------------------	--------------------	-------------

Density	0.910 g/cm ³	0.910 g/cm ³	ISO 1183/A
Melt Volume-Flow Rate (MVR) (230°C/2.16 kg)	2.00 cm ³ /10min	2.00 cm ³ /10min	ISO 1133
Water Absorption			ISO 62
Equilibrium, 73°F (23°C), 50% RH	0.16 %	0.16 %	

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
------------	-------------------------	--------------------	-------------

Tensile Modulus	276000 psi	1900 MPa	ISO 527-2/1A/1
Tensile Stress (Yield)	5510 psi	38.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	8.0 %	8.0 %	ISO 527-2/1A/50

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
--------	-------------------------	--------------------	-------------

Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	1.7 ft·lb/in ²	3.5 kJ/m ²	
73°F (23°C)	4.3 ft·lb/in ²	9.0 kJ/m ²	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	10 ft·lb/in ²	21 kJ/m ²	
73°F (23°C)	No Break	No Break	

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
---------	-------------------------	--------------------	-------------


Heat Deflection Temperature			
66 psi (0.45 MPa), Unannealed	228 °F	109 °C	ISO 75-2/Bf
264 psi (1.8 MPa), Unannealed	142 °F	61.0 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	315 °F	157 °C	ISO 306/A50
--	207 °F	97.0 °C	ISO 306/B50
Ball Pressure Test (293°F (145°C))	Pass	Pass	IEC 60695-10-2
RTI Elec			UL 746
0.030 in (0.75 mm)	149 °F	65.0 °C	
0.06 in (1.5 mm)	149 °F	65.0 °C	
0.12 in (3.0 mm)	149 °F	65.0 °C	
RTI Imp			UL 746
0.030 in (0.75 mm)	149 °F	65.0 °C	
0.06 in (1.5 mm)	149 °F	65.0 °C	
0.12 in (3.0 mm)	149 °F	65.0 °C	
RTI Str			UL 746
0.030 in (0.75 mm)	149 °F	65.0 °C	
0.06 in (1.5 mm)	149 °F	65.0 °C	
0.12 in (3.0 mm)	149 °F	65.0 °C	

Technical Data Sheet
POLYFLAM® RPP 2000 E
 Polypropylene Homopolymer
 Engineering Plastics



Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index	600 V	600 V	IEC 60112
High Amp Arc Ignition (HAI)			UL 746
0.030 in (0.75 mm)	PLC 0	PLC 0	
0.06 in (1.5 mm)	PLC 0	PLC 0	
0.12 in (3.0 mm)	PLC 0	PLC 0	
Hot-wire Ignition (HWI)			UL 746
0.030 in (0.75 mm)	PLC 4	PLC 4	
0.06 in (1.5 mm)	PLC 3	PLC 3	
0.12 in (3.0 mm)	PLC 2	PLC 2	
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 in (2.00 mm), Self-Extinguishing	0.0 in/min	0.0 mm/min	ISO 3795
0.0787 in (2.00 mm), Self-Extinguishing	0.0 in/min	0.0 mm/min	FMVSS 302
Flame Rating			UL 94 IEC 60695-11-10, -20
0.030 in (0.75 mm)	V-2	V-2	
0.06 in (1.5 mm)	V-2	V-2	
0.12 in (3.0 mm)	V-2	V-2	
Glow Wire Flammability Index			IEC 60695-2-12
0.030 in (0.75 mm)	1760 °F	960 °C	
0.06 in (1.5 mm)	1760 °F	960 °C	
0.12 in (3.0 mm)	1760 °F	960 °C	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.030 in (0.75 mm)	1610 °F	875 °C	
0.06 in (1.5 mm)	1560 °F	850 °C	
0.12 in (3.0 mm)	1470 °F	800 °C	
Oxygen Index	27 %	27 %	ISO 4589-2

Technical Data Sheet
POLYFLAM® RPP 2000 E
 Polypropylene Homopolymer
 Engineering Plastics

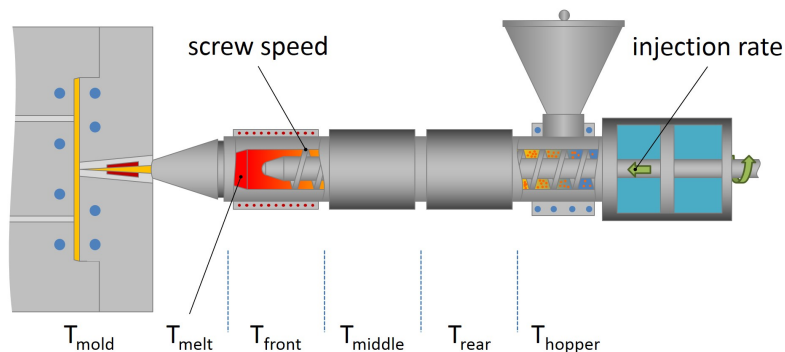

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	158 to 176 °F	70 to 80 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Rear Temperature	356 °F	180 °C
Middle Temperature	392 °F	200 °C
Front Temperature	410 °F	210 °C
Nozzle Temperature	428 °F	220 °C
Processing (Melt) Temp	356 to 410 °F	180 to 210 °C
Mold Temperature	104 to 176 °F	40 to 80 °C
Injection Pressure	11600 to 17400 psi	80.0 to 120 MPa
Injection Rate	Slow-Moderate	Slow-Moderate
Holding Pressure	5800 to 13100 psi	40.0 to 90.0 MPa
Back Pressure	725 to 1450 psi	5.00 to 10.0 MPa
Cushion	< 0.197 in	< 5.00 mm
Screw Speed	< 709 in/min	< 18 m/min

Notes

These are typical property values not to be construed as specification limits.