

ATEVA® 1241

ATEVA®

Product information

Resin Identification	(EVAC)	ISO 1043
Part Marking Code	>(EVAC)<	ISO 11469
Vinyl acetate content	12 %	

Rheological properties

Melt Flow Index	10 g/10min	ASTM D 1238
Temperature	190 °C	
Load	2.16 kg	

Typical mechanical properties

Tensile Strength	13 MPa	ASTM D 638
Elongation at break	710 %	ASTM D 638
Shore A hardness	95	ASTM D 2240
Shore D hardness	40	ASTM D 2240

Thermal properties

Melting temperature	95 °C	ASTM D 3418
---------------------	-------	-------------


Physical/Other properties

Density	932 kg/m ³	
---------	-----------------------	--

ATEVA® 1241

ATEVA®

Stress-strain

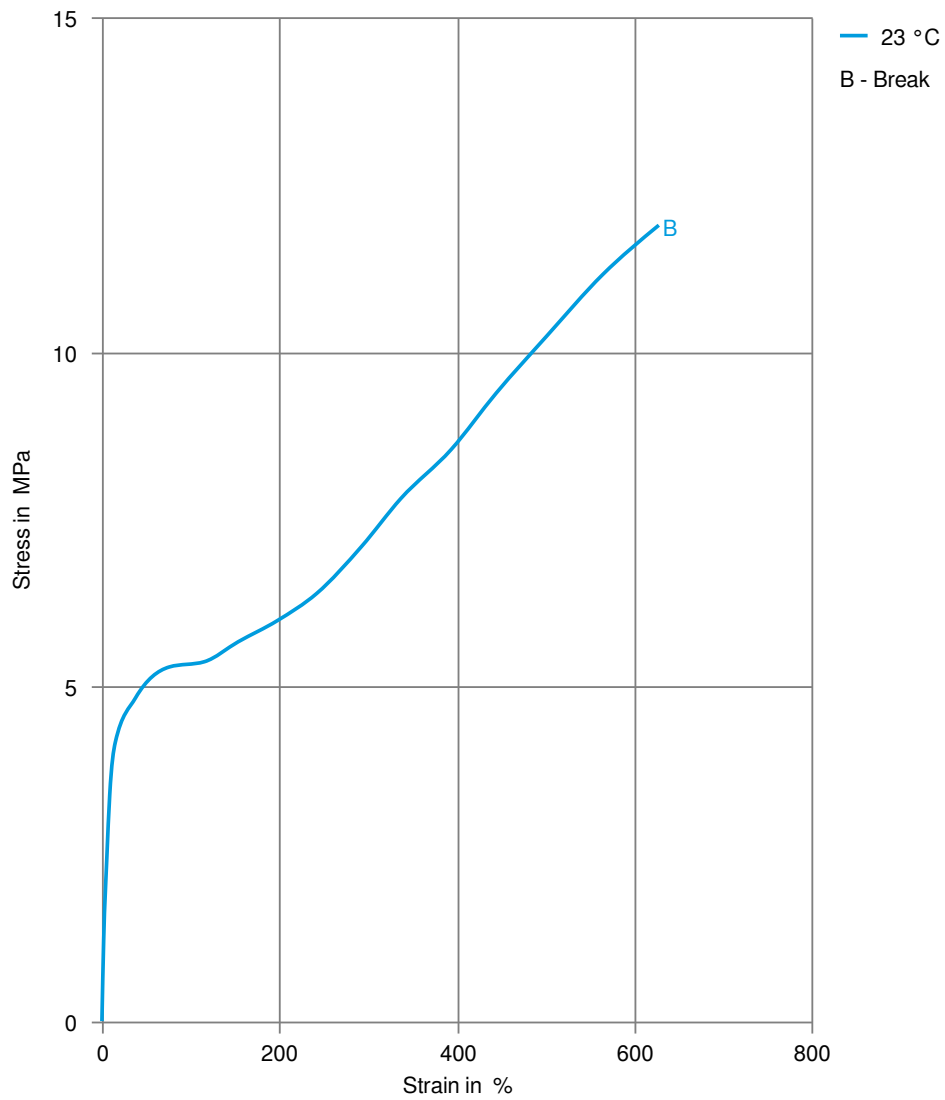

ATEVA® 1241

ATEVA®

Secant modulus-strain

