

ATEVA® 3325A

ATEVA®

Product information

Resin Identification	(EVAC)	ISO 1043
Part Marking Code	>(EVAC)<	ISO 11469
Vinyl acetate content	33 %	

Rheological properties

Melt Flow Index	43 g/10min	ASTM D 1238
Temperature	190 °C	
Load	2.16 kg	

Typical mechanical properties

Tensile Strength	9 MPa	ASTM D 638
Elongation at break	900 %	ASTM D 638
Flexural modulus	7 MPa	ASTM D 790
Shore A hardness	68	ASTM D 2240
Shore D hardness	16	ASTM D 2240

Thermal properties

Melting temperature	60 °C	ASTM D 3418
Ring and ball softening point	113 °C	ASTM E 28


Physical/Other properties

Density	952 kg/m ³	
---------	-----------------------	--

ATEVA® 3325A

ATEVA®

Stress-strain

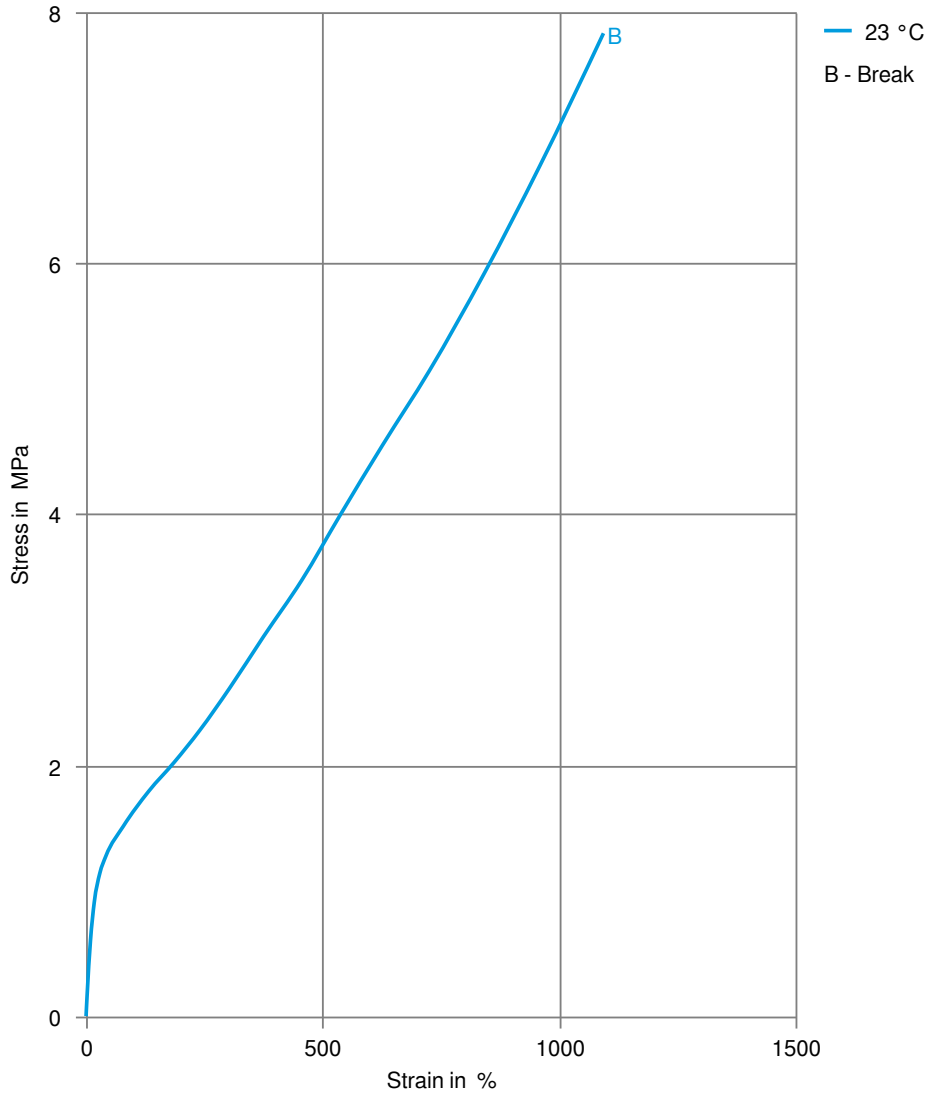

ATEVA® 3325A

ATEVA®

Secant modulus-strain

