

ATEVA® 4030ACX

ATEVA®

Product information

Resin Identification	(EVAC)	ISO 1043
Part Marking Code	>(EVAC)<	ISO 11469
Vinyl acetate content	40 %	

Rheological properties

Melt Flow Index	55 g/10min	ASTM D 1238
Temperature	190 °C	
Load	2.16 kg	

Typical mechanical properties

Tensile Strength	5 MPa	ASTM D 638
Elongation at break	>1150 %	ASTM D 638
Flexural modulus	2 MPa	ASTM D 790
Shore A hardness	53	ASTM D 2240

Thermal properties

Melting temperature	52 °C	ASTM D 3418
Ring and ball softening point	107 °C	ASTM E 28


Physical/Other properties

Density	962 kg/m ³	
---------	-----------------------	--

ATEVA® 4030ACX

ATEVA®

Stress-strain

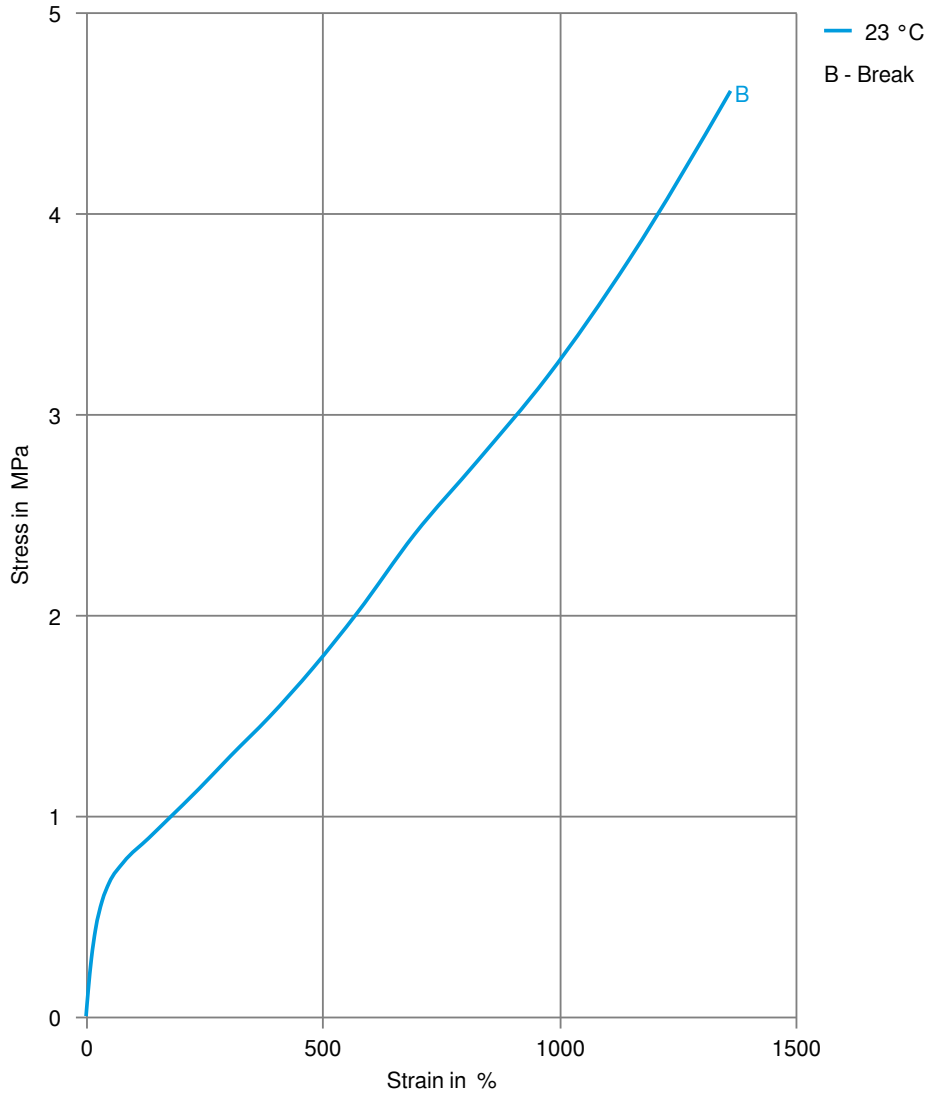

ATEVA® 4030ACX

ATEVA®

Secant modulus-strain

