

# GHR<sup>®</sup> 8020 EP

## GUR<sup>®</sup>

Coarse particle HMW-PE powder grade; melt processable

Samples of the above listed GUR<sup>®</sup> product are tested according to the requirements described in monograph 3.1.3. of Ph.Eur. 10.0 "Polyolefines". The results of those tests indicated the sampled material was compliant with monograph 3.1.3 of Ph.Eur. 10.0.

Please note that the manufacturer or seller of parts and articles made out of the above mentioned products have to take the full responsibility regarding applicable legal requirements.

### Product information

Resin Identification	(PE-HMW)	ISO 1043
Part Marking Code	>(PE-HMW)<	ISO 11469
Average molecular weight	400000 g/mol	Margolies' equation
Average particle size, d50	220 µm	laser scattering

### Rheological properties

Melt mass-flow rate	3.5 g/10min	ISO 1133
Melt mass-flow rate, Temperature	190 °C	
Melt mass-flow rate, Load	21.6 kg	
Viscosity number	400 cm <sup>3</sup> /g	ISO 307, 1628
Intrinsic viscosity	400	ISO 307, 1628

### Typical mechanical properties

Tensile modulus	1250 MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	26 MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	10 %	ISO 527-1/-2
Tensile stress at 50% strain	18 MPa	ISO 527-1/-2
Tensile stress at break, 50mm/min	38 MPa	ISO 527-1/-2
Nominal strain at break	900 %	ISO 527-1/-2
Elongational stress F, 150/10	0.01 MPa	ISO 21304-2
Charpy double notched impact strength, 23°C	35 kJ/m <sup>2</sup>	ISO 21304-2
Poisson's ratio	0.44 <sup>[C]</sup>	
Shore D hardness, 15s	63	ISO 48-4 / ISO 868

[C]: Calculated

### Tribological properties

Wear by sandslurry method (based on GUR 4120=100)	330
------------------------------------------------------	-----

### Thermal properties

Temperature of deflection under load, 1.8 MPa	44 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	80 °C	ISO 306

# GHR® 8020 EP

GUR®

## Electrical properties

Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E12 Ohm	IEC 62631-3-2

## Physical/Other properties

Density	950 kg/m <sup>3</sup>	ISO 1183
Bulk density	440 kg/m <sup>3</sup>	ISO 60


## Characteristics

Processing	Injection Moulding, Porous Sintering
Delivery form	Powder
Special characteristics	High impact or impact modified, Hydrolysis resistant, Low wear / Low friction, Chemical resistant

# GHR<sup>®</sup> 8020 EP

GUR<sup>®</sup>

Stress-strain

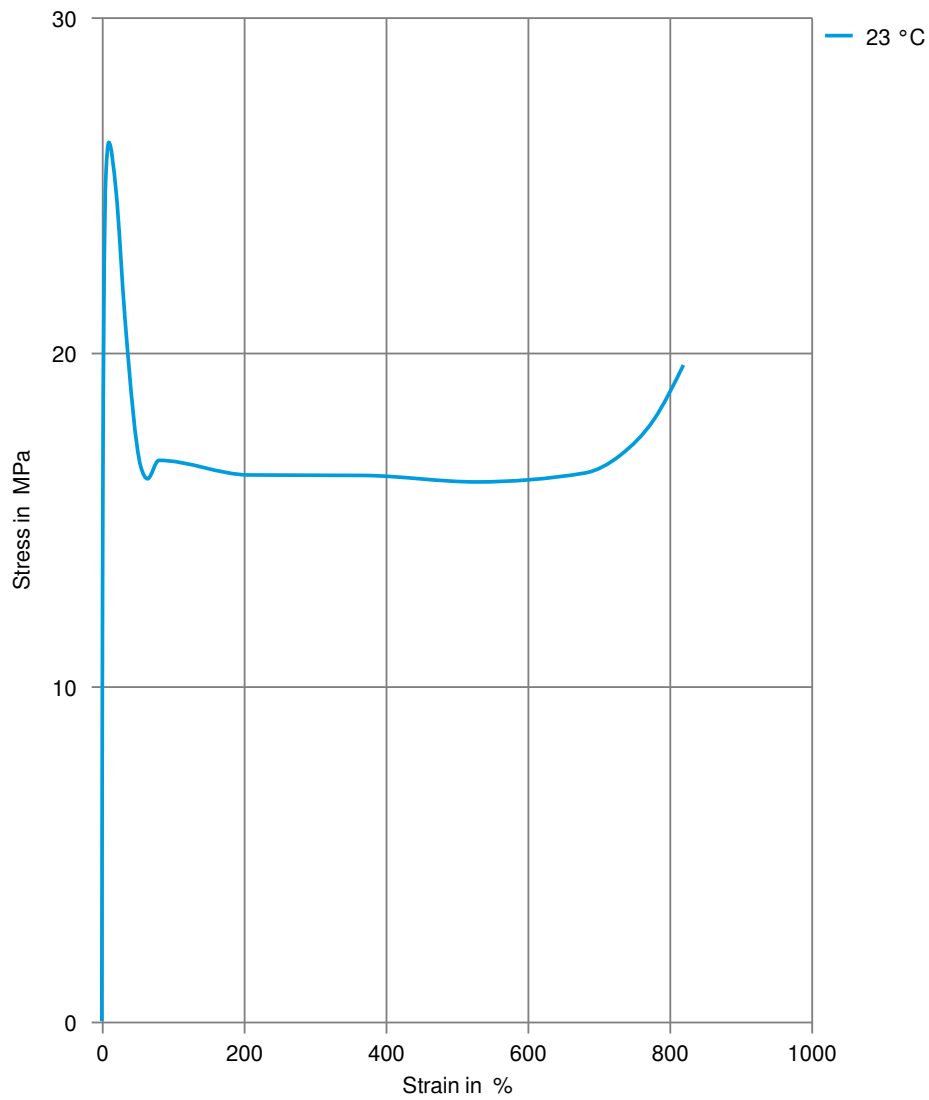

# GHR® 8020 EP

GUR®

## Secant modulus-strain

