

# COOLPOLY® D5506

## COOLPOLY®

CoolPoly D series of thermally conductive plastics transfers heat, a characteristic previously unavailable in injection molding grade polymers. CoolPoly is lightweight, netshape moldable and allows design freedom in applications previously restricted to metals. The D series is electrically non-conductive and can be used for its dielectric properties.

### Product information

Resin Identification	LCP-MD57	ISO 1043
Part Marking Code	>LCP-MD57<	ISO 11469

### Rheological properties

Moulding shrinkage, parallel	0.1 <sup>[1]</sup> %	ISO 294-4, 2577
Moulding shrinkage, normal	0.3 <sup>[1]</sup> %	ISO 294-4, 2577

[1]: RI data

### Typical mechanical properties

Tensile modulus	9890 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	50 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	0.86 %	ISO 527-1/-2
Flexural modulus	13500 MPa	ISO 178
Flexural strength	79 MPa	ISO 178
Charpy impact strength, 23°C	7 kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	3.6 kJ/m <sup>2</sup>	ISO 179/1eA
Poisson's ratio	0.37	

### Thermal properties

Temperature of deflection under load, 1.8 MPa	228 °C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	277 °C	ISO 75-1/-2
Thermal conductivity, flow	9.4 W/(m K)	ISO 22007-2
Thermal conductivity, crossflow	9 W/(m K)	ISO 22007-2
Thermal conductivity, through plane	1.9 W/(m K)	ISO 22007-2

### Flammability

Burning Behav. at thickness h	V-0 class	IEC 60695-11-10
Thickness tested	1 mm	IEC 60695-11-10
UL recognition	yes	UL 94

### Electrical properties

Relative permittivity, 1MHz	3.8	IEC 62631-2-1
Dissipation factor, 1MHz	220 E-4	IEC 62631-2-1
Volume resistivity	>1E13 <sup>[2]</sup> Ohm.m	IEC 62631-3-1
Surface resistivity	>1E15 <sup>[3]</sup> Ohm	IEC 62631-3-2
Comparative tracking index, 100 drops	525 <sup>[4]</sup>	IEC 60112
Arc Resistance	300 s	UL 746B

[2]: Result value: 7.9E13 Ohm\*m

[3]: Result value: 6.3E15 Ohm

[4]: Evaluation of CTI acc. to ASTM D 3638: 555 Volt

# COOLPOLY® D5506

COOLPOLY®

## Physical/Other properties

Density 1750 kg/m<sup>3</sup> ISO 1183


## Injection

Back pressure 0.35 MPa

## Characteristics

Processing Injection Moulding  
Special characteristics Flame retardant, High Flow

## Stress-strain

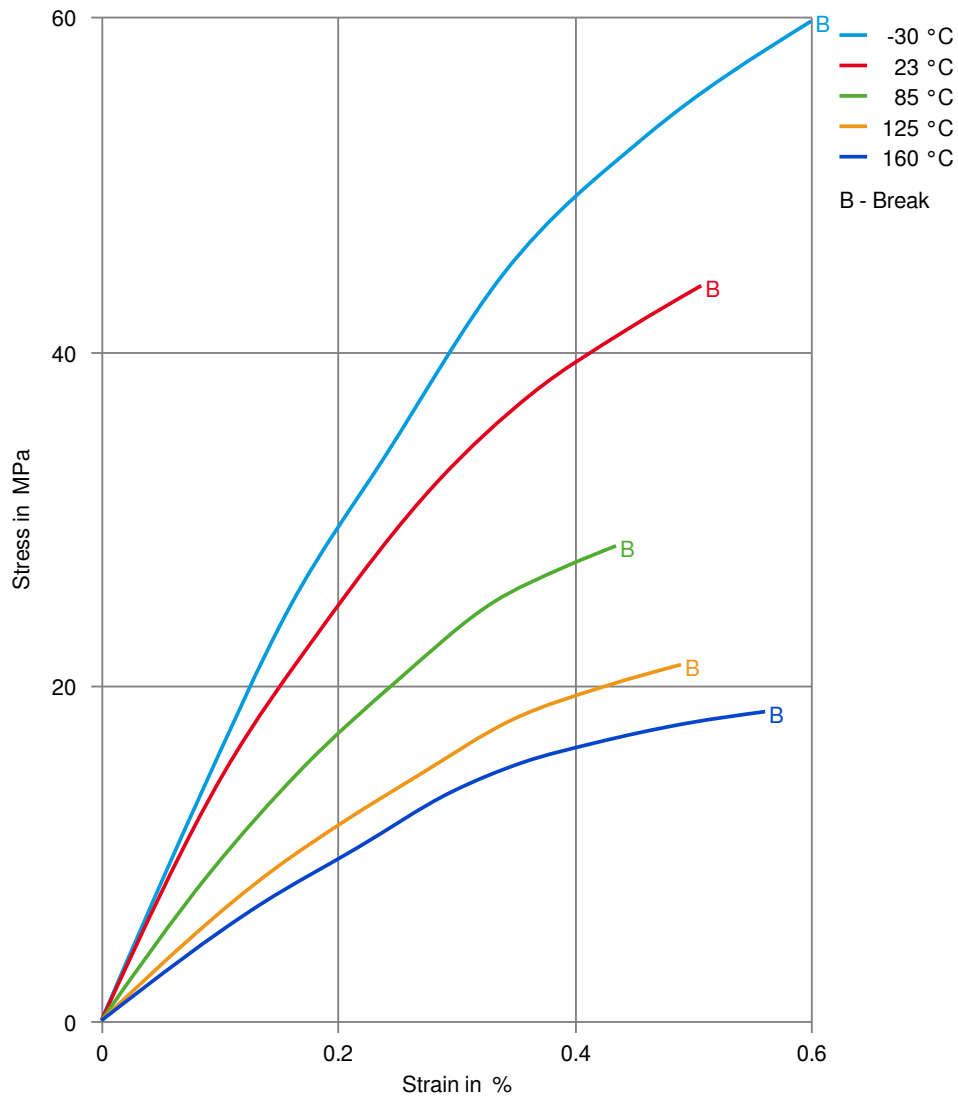

# COOLPOLY® D5506

COOLPOLY®

## Secant modulus-strain

