

VECTRA® A950

Liquid Crystal Polymer

Unreinforced Vectra grade suitable for extrusion.

Chemical abbreviation according to ISO 1043-1 : LCP Inherently flame retardant FDA compliant. UL-Listing V-0 in natural and black at 0.42mm thickness per UL 94 flame testing. Relative-Temperature-Index (RTI) according to UL 746B: electrical 240°C, mechanical 220°C. UL = Underwriters Laboratories (USA)

Product information

Resin Identification	LCP	ISO 1043
Part Marking Code	>LCP<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.7 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	7800 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	148 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	5.7 %	ISO 527-1/-2
Flexural modulus	9100 MPa	ISO 178
Flexural strength	160 MPa	ISO 178
Tensile creep modulus, 1h	9000 MPa	ISO 899-1
Tensile creep modulus, 1000h	6600 MPa	ISO 899-1
Charpy impact strength, 23°C	267 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	53 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	95 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	95 kJ/m ²	ISO 180/1A
Izod impact strength, 23°C	252 kJ/m ²	ISO 180/1U
Poisson's ratio	0.488	

Thermal properties

Melting temperature, 10°C/min	280 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	193 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	94 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	145 °C	ISO 306
Coefficient of linear thermal expansion (CLTE), parallel	-2.4 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	81 E-6/K	ISO 11359-1/-2

Flammability

Burning Behav. at thickness h	V-0 class	IEC 60695-11-10
Oxygen index	35 %	ISO 4589-1/-2

Electrical properties

Relative permittivity, 100Hz	3.2	IEC 62631-2-1
Relative permittivity, 1MHz	3	IEC 62631-2-1
Dissipation factor, 100Hz	159 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	200 E-4	IEC 62631-2-1
Volume resistivity	1E13 Ohm.m	IEC 62631-3-1

VECTRA® A950

Liquid Crystal Polymer

Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	47 kV/mm	IEC 60243-1
Comparative tracking index	150	IEC 60112
Comparative tracking index M	group IIIb	IEC 60112

Physical/Other properties

Humidity absorption, 2mm	0.03 %	Sim. to ISO 62
Water absorption, 2mm	0.06 %	Sim. to ISO 62
Density	1400 kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	150 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.01 %
Melt Temperature Optimum	290 °C
Min. melt temperature	285 °C
Max. melt temperature	295 °C
Screw tangential speed	0.2 - 0.3 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	80 °C
Max. mould temperature	120 °C
Back pressure	3 MPa
Ejection temperature	236 °C

Characteristics

Processing	Injection Moulding, Film Extrusion, Extrusion, Sheet Extrusion
Delivery form	Pellets
Special characteristics	High Flow

Additional information

Injection molding

Preprocessing

Vectra resins are well known for their excellent thermal and hydrolytic stability. In order to ensure these properties are optimum, the resin should be dried correctly prior to processing. Vectra A-grades should be dried at 150 C for a minimum of 4 hours in a desiccant dryer.

Processing

A three-zone screw evenly divided into feed, compression, and metering zones is preferred. A higher percentage of feed flights may be needed for smaller machines: 1/2 feed, 1/4 compression, 1/4 metering.

Vectra LCPs are shear thinning, their melt viscosity decreases quickly as shear rate increases. For parts that are difficult to fill, the molder can increase the injection velocity to improve melt flow.

VECTRA® A950

Liquid Crystal Polymer


Pre-Drying

VECTRA should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -40^{\circ}\text{C}$. The time between drying and processing should be as short as possible.

Storage

For subsequent storage of the material in the dryer until processed the temperature does not need to be lowered for grades A, B, C, D and V ($\leq 24\text{ h}$).

Stress-strain

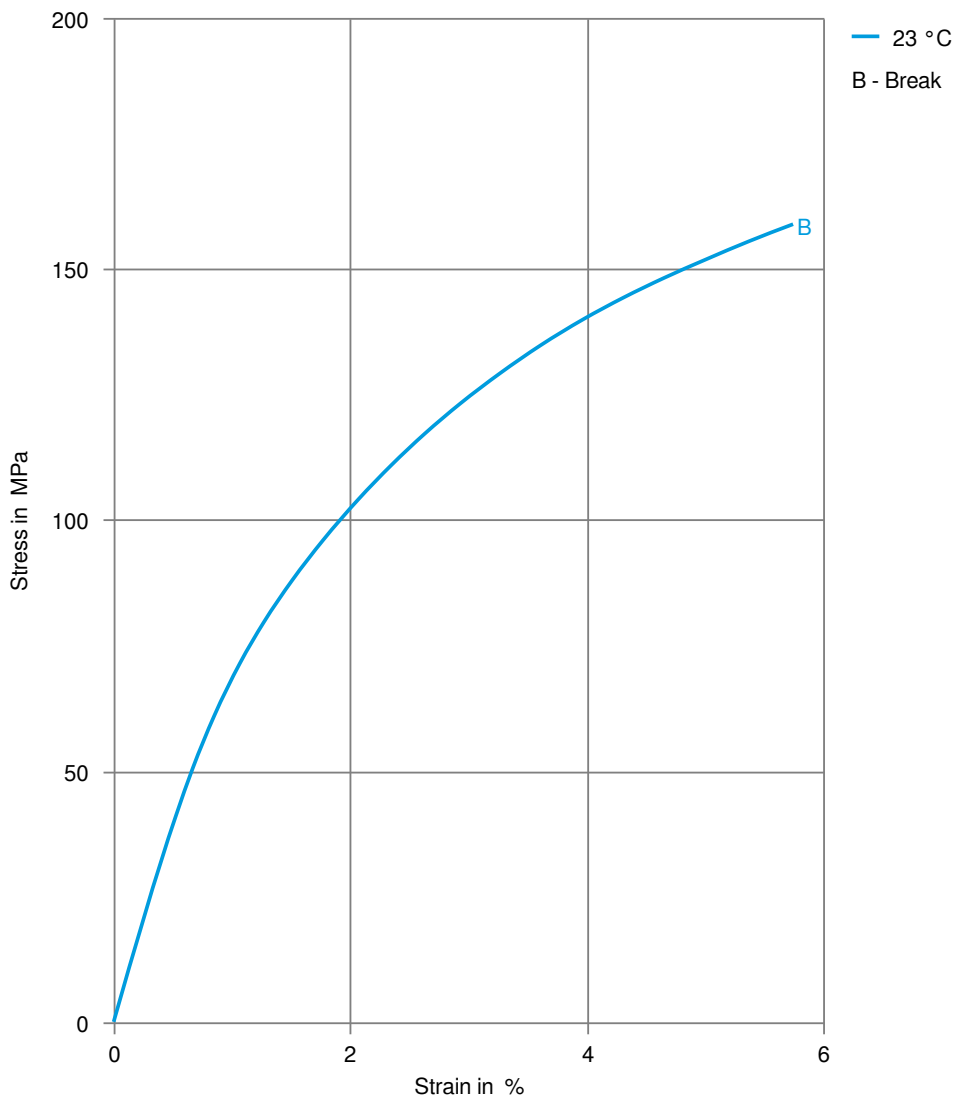

VECTRA® A950

Liquid Crystal Polymer

Secant modulus-strain

