

FRIANYL® B GF30 V0 ECO-R BK 9004/YG

FRIANYL®

FRIANYL B GF30 V0 ECO-R BK 9004/YG incorporates 30% of post-industrial recycled content by weight in the finished product. The product is designed for Electrical applications requiring self-extinguishing properties combined with good mechanical performances.

Product information

Resin Identification	(PA6)-GF30 FR(40) REC(30)	ISO 1043
Part Marking Code	>(PA6)-GF30 FR(40) REC(30)<	ISO 11469
Continuous Service Temperature	130 °C	IEC 60216-1

Rheological properties

	dry/cond.		
Viscosity number	150 / *	cm ³ /g	ISO 307, 1628
Moulding shrinkage range, parallel	0.3 - 0.6	%	ISO 294-4, 2577
Moulding shrinkage range, normal	0.6 - 0.9	%	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile modulus	10300 / 5800	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	125 / 75	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2.5 / 6.5	%	ISO 527-1/-2
Charpy impact strength, 23°C	50 / >50	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	45 / 40	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	8 / 10	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	6.5 / 6	kJ/m ²	ISO 179/1eA
Poisson's ratio	0.34 / 0.35 ^[C]		

[C]: Calculated

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	220 / *	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	190 / *	°C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	210 / *	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 10N	213	°C	ISO 306
Ball pressure test	175 / -	°C	IEC 60695-10-2

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	V-0 / *	class	IEC 60695-11-10
Burning Behav. at thickness h	V-0 / *	class	IEC 60695-11-10
Thickness tested	0.75 / *	mm	IEC 60695-11-10
UL recognition	yes / *		UL 94
Glow Wire Flammability Index, 0.75mm	850 / -	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	725 / -	°C	IEC 60695-2-13

FRIANYL® B GF30 V0 ECO-R BK 9004/YG

FRIANYL®

Electrical properties

	dry/cond.		
Volume resistivity	>1E13/-	Ohm.m	IEC 62631-3-1
Surface resistivity	*/1E13	Ohm	IEC 62631-3-2
Comparative tracking index, 100 drops	600		IEC 60112

Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	1.2/*	%	Sim. to ISO 62
Water absorption, 2mm	4.3/*	%	Sim. to ISO 62
Density	1430/-	kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.1 %
Melt Temperature Optimum	250 °C
Min. melt temperature	240 °C
Max. melt temperature	260 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	80 °C
Min. mould temperature	60 °C
Max. mould temperature	90 °C


Characteristics

Processing	Injection Moulding
Delivery form	Granules
Additives	Flame retardant, Non-halogenated/Red phosphorous free flame retardant
Special characteristics	Flame retardant, Heat stabilised or stable to heat
Sustainability	Recycled Content

FRIANYL® B GF30 V0 ECO-R BK 9004/YG

FRIANYL®


Stress-strain (dry)

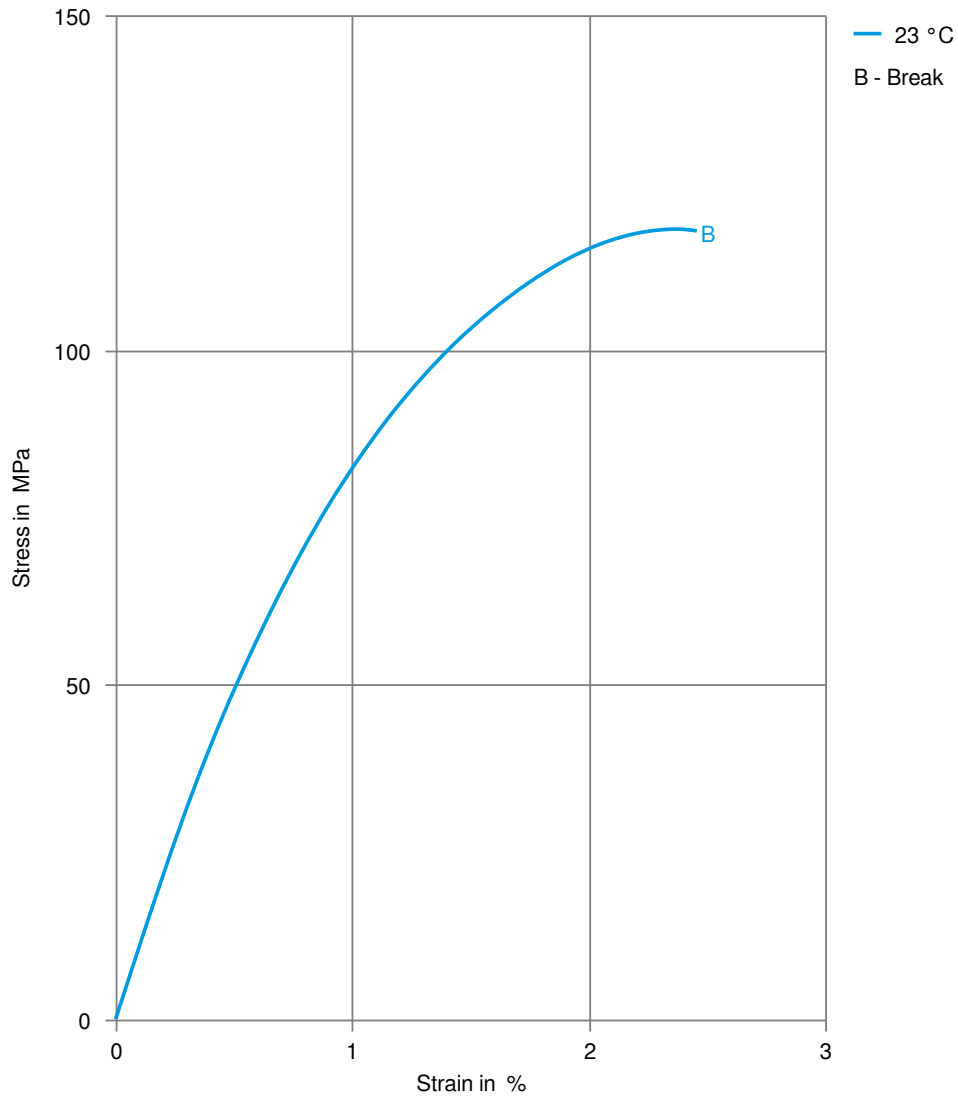

FRIANYL® B GF30 V0 ECO-R BK 9004/YG

FRIANYL®


Stress-strain (cond.)

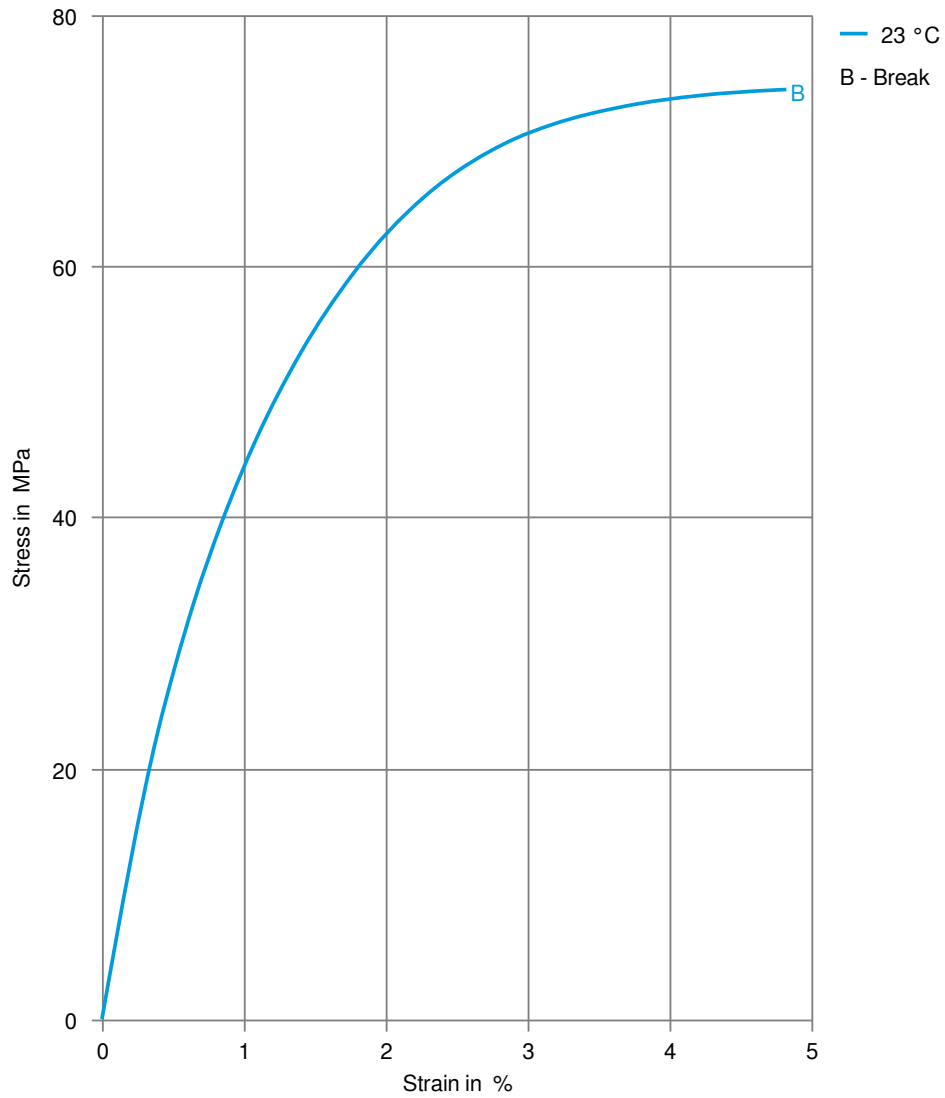

FRIANYL® B GF30 V0 ECO-R BK 9004/YG

FRIANYL®

Secant modulus-strain (dry)

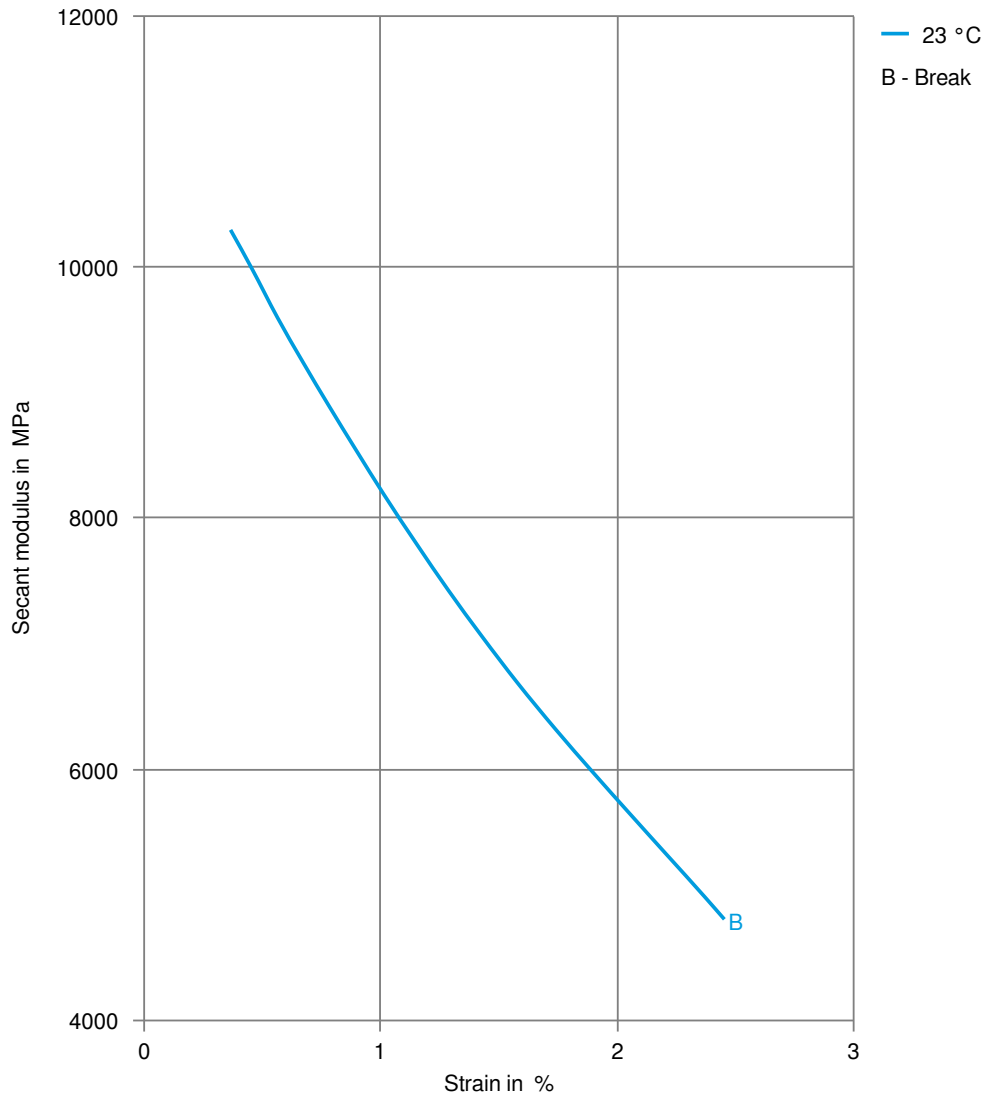

FRIANYL® B GF30 V0 ECO-R BK 9004/YG

FRIANYL®

Secant modulus-strain (cond.)

