

Zytel® LC6601 BK551

LONG CHAIN POLYAMIDE RESIN

Zytel® LCPA long chain polyamide resins provide an innovative and growing portfolio of flexible polymers with excellent thermal, chemical, and hydrolysis resistance. The diverse selection of Zytel® LCPA grades is targeted for a range of performance characteristics, balancing temperature resistance, flexibility and low permeation.

Zytel® LC6601 BK551 is a toughened, polyamide 612 resin plasticized for improved flexibility in extrusion applications.

Product information

Resin Identification	PA612-IP	ISO 1043
Part Marking Code	>PA612-IP<	ISO 11469
ISO designation	ISO 16396-PA612-I,,M1CG1H,S18-007	

Typical mechanical properties

	dry/cond.		
Tensile modulus	880/-	MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	32/-	MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	25/-	%	ISO 527-1/-2
Nominal strain at break	>50/-	%	ISO 527-1/-2
Tensile strain at break, 50mm/min	250/-	%	ISO 527-1/-2
Flexural modulus	850/-	MPa	ISO 178
Charpy impact strength, 23°C	N/-	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	70/-	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	15/-	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	15/-	kJ/m ²	ISO 179/1eA
Poisson's ratio	0.45/-		

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	215/*	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	45/*	°C	ISO 75-1/-2

Flammability

FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80 mm/min	ISO 3795 (FMVSS 302)

Physical/Other properties

	dry/cond.		
Density	1020/-	kg/m ³	ISO 1183

Extrusion

Drying Temperature	75 - 80 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	≤0.06 %
Melt Temperature Optimum	240 °C
Melt Temperature Range	230 - 245 °C

Zytel® LC6601 BK551

LONG CHAIN POLYAMIDE RESIN


Characteristics

Processing	Injection Moulding, Film Extrusion, Extrusion, Sheet Extrusion, Other Extrusion
Delivery form	Pellets
Special characteristics	Heat stabilised or stable to heat

Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
General Motors	GMW17604P-PA612	Black

Viscosity-shear rate

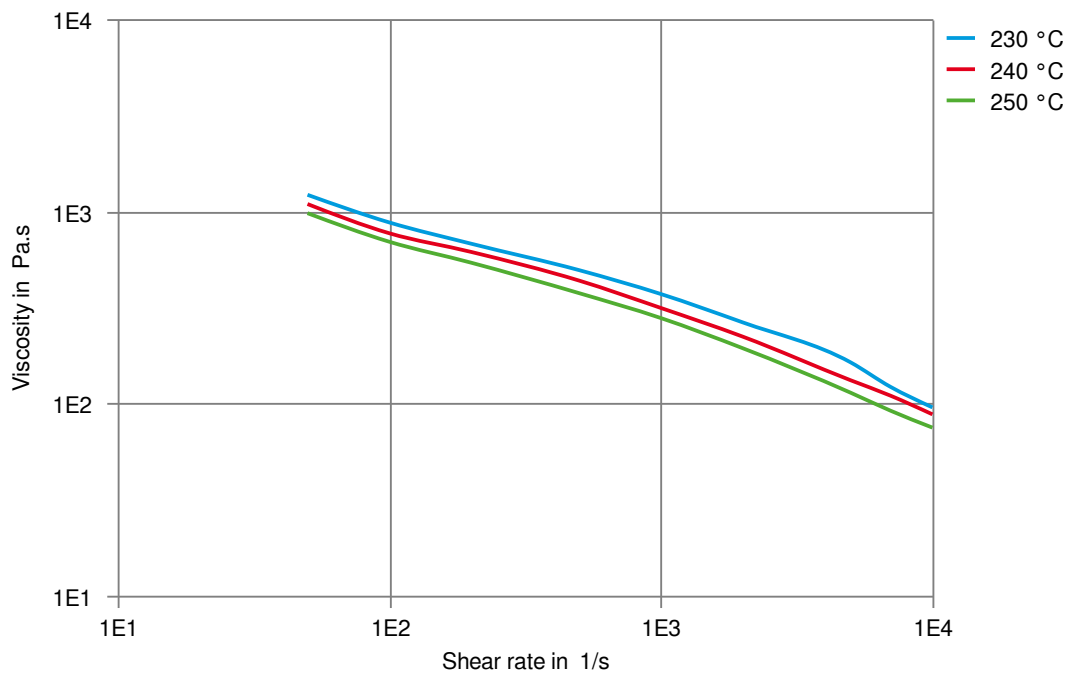

Zytel® LC6601 BK551

LONG CHAIN POLYAMIDE RESIN

Shearstress-shear rate

