

CELANYL® A3 WR GF30 NC 1102/Z/FA

CELANYL®

Designed for any technical application requiring long term heat resistance packed with prime quality mechanical performances. Suitable for drinking water applications.

Product information

Resin Identification	PA66-GF30	ISO 1043
Part Marking Code	>PA66-GF30<	ISO 11469
Continuous Service Temperature	130 °C	IEC 60216-1

Rheological properties

Moulding shrinkage range, parallel	0.3 - 0.6 %	ISO 294-4, 2577
Moulding shrinkage range, normal	0.6 - 0.9 %	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile modulus	10000/-	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	190/-	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	3/-	%	ISO 527-1/-2
Flexural modulus	8500/-	MPa	ISO 178
Flexural strength	260/-	MPa	ISO 178
Charpy impact strength, 23°C	70/-	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	13/-	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	10/-	kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	11/-	kJ/m ²	ISO 180/1A
Izod notched impact strength, -30°C	8.0/-	kJ/m ²	ISO 180/1A
Poisson's ratio	0.34/- ^[C]		

[C]: Calculated

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	265/*	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	250/*	°C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	260/*	°C	ISO 75-1/-2

Flammability

	dry/cond.		
Burning Behav. at thickness h	HB/*	class	IEC 60695-11-10
Thickness tested	0.8/*	mm	IEC 60695-11-10
UL recognition	yes/*		UL 94
FMVSS Class	B		ISO 3795 (FMVSS 302)

Electrical properties

	dry/cond.		
Volume resistivity	1E13/-	Ohm.m	IEC 62631-3-1
Surface resistivity	*/1E13	Ohm	IEC 62631-3-2
Electric strength	21/-	kV/mm	IEC 60243-1
Comparative tracking index	500/-		IEC 60112

CELANYL® A3 WR GF30 NC 1102/Z/FA

CELANYL®

Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	1.7/*	%	Sim. to ISO 62
Water absorption, 2mm	5.9/*	%	Sim. to ISO 62
Density	1370/-	kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.15 %
Melt Temperature Optimum	295 °C
Min. melt temperature	285 °C
Max. melt temperature	305 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	70 °C
Max. mould temperature	120 °C


Characteristics

Processing	Injection Moulding
Delivery form	Granules
Special characteristics	Heat stabilised or stable to heat

CELANYL® A3 WR GF30 NC 1102/Z/FA

CELANYL®


Stress-strain (dry)

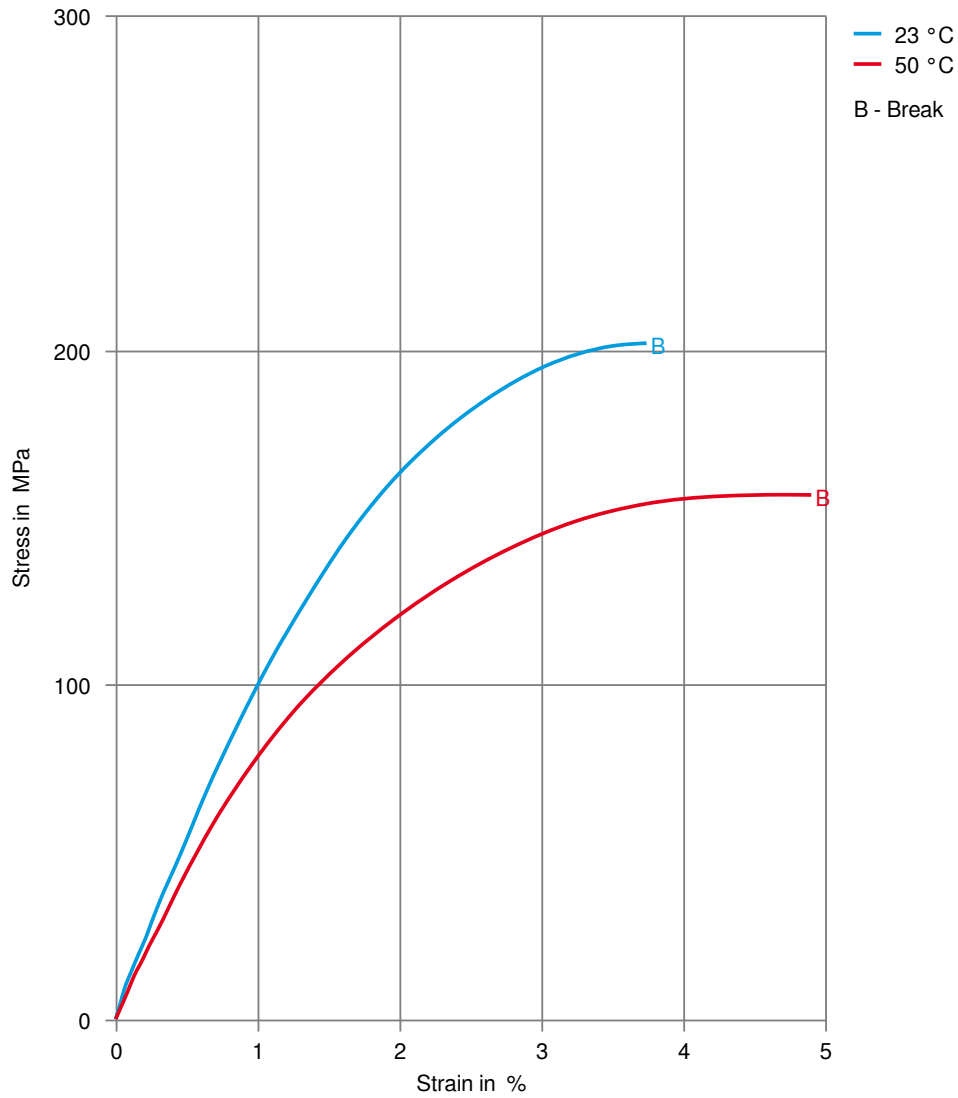

CELANYL® A3 WR GF30 NC 1102/Z/FA

CELANYL®

Secant modulus-strain (dry)

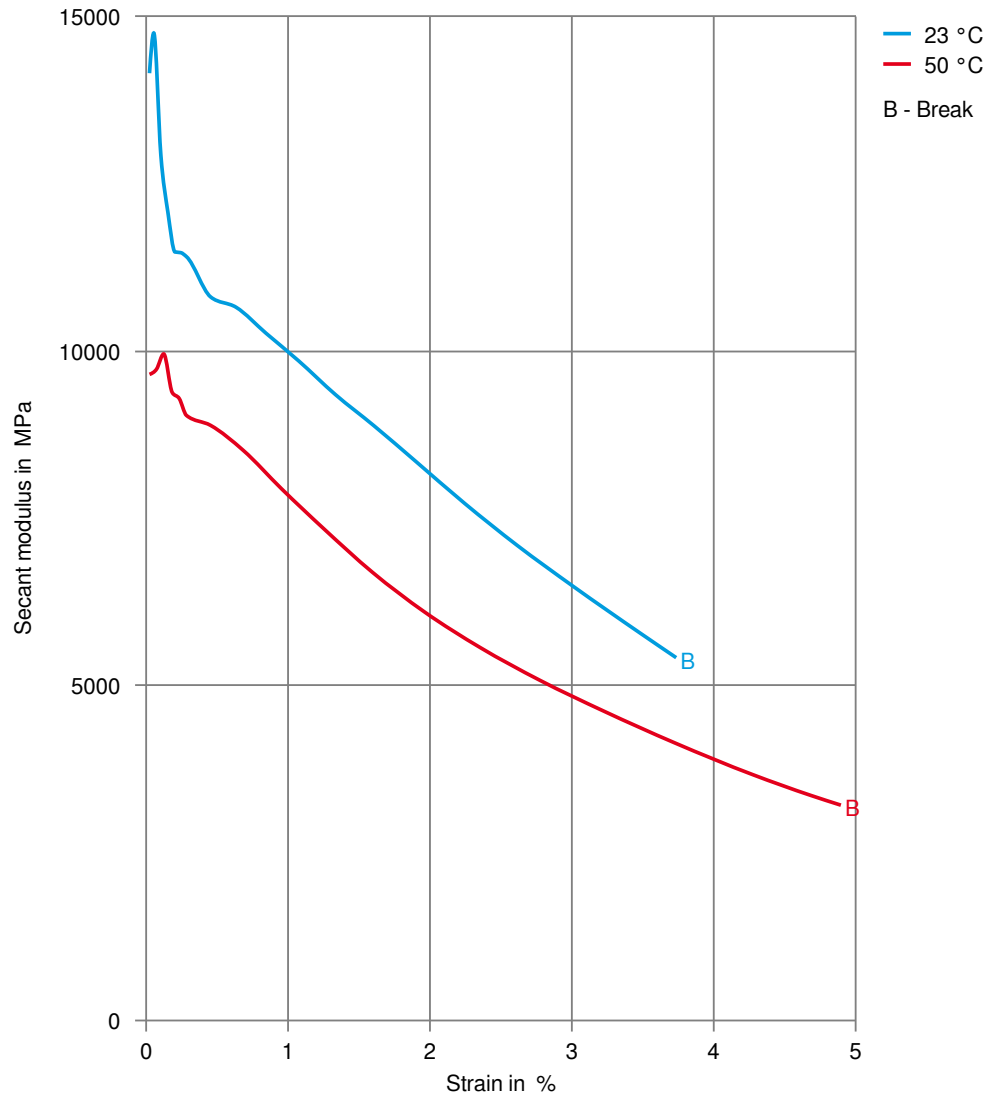

CELANYL® A3 WR GF30 NC 1102/Z/FA

CELANYL®

Chemical Media Resistance

Salt solutions

- ✓ Sodium Hypochlorite solution (10% by mass), 23°C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).