

# CELSTRAN® PA66-GF40-02 AD3002 BLACK

## CELSTRAN® Long Fibre

40% Long glass fiber reinforced, heat stabilized, Nylon 6/6

### Product information

Resin Identification	PA66-LGF40	ISO 1043
Part Marking Code	>PA66-LGF40<	ISO 11469

### Typical mechanical properties

	dry/cond.		
Tensile modulus	13700 / 11100	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	200 / 159	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	1.8 / 2	%	ISO 527-1/-2
Flexural modulus	12000 / 9200	MPa	ISO 178
Flexural strength	310 / 240	MPa	ISO 178
Charpy impact strength, 23°C	55 / 67	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	52 / -	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	25 / 21	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	28 / -	kJ/m <sup>2</sup>	ISO 179/1eA
Poisson's ratio	0.33 / - <sup>[C]</sup>		

[C]: Calculated

### Thermal properties

	dry/cond.		
Temperature of deflection under load, 1.8 MPa	259 / *	°C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	240 / *	°C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	14 / *	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	83 / *	E-6/K	ISO 11359-1/-2

### Physical/Other properties

	dry/cond.		
Density	1460 / -	kg/m <sup>3</sup>	ISO 1183

### Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	295 °C
Min. melt temperature	285 °C
Max. melt temperature	305 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	70 °C
Max. mould temperature	120 °C
Hold pressure range	50 - 100 MPa

# CELSTRAN® PA66-GF40-02 AD3002 BLACK

## CELSTRAN® Long Fibre

### Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Special characteristics	Heat stabilised or stable to heat


### Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
Ford	WSB-M4D678-A	
General Motors	GMW17810P-PA66-GF40	Black

### Dynamic Tensile modulus-temperature (dry)

# CELSTRAN® PA66-GF40-02 AD3002 BLACK


CELSTRAN® Long Fibre

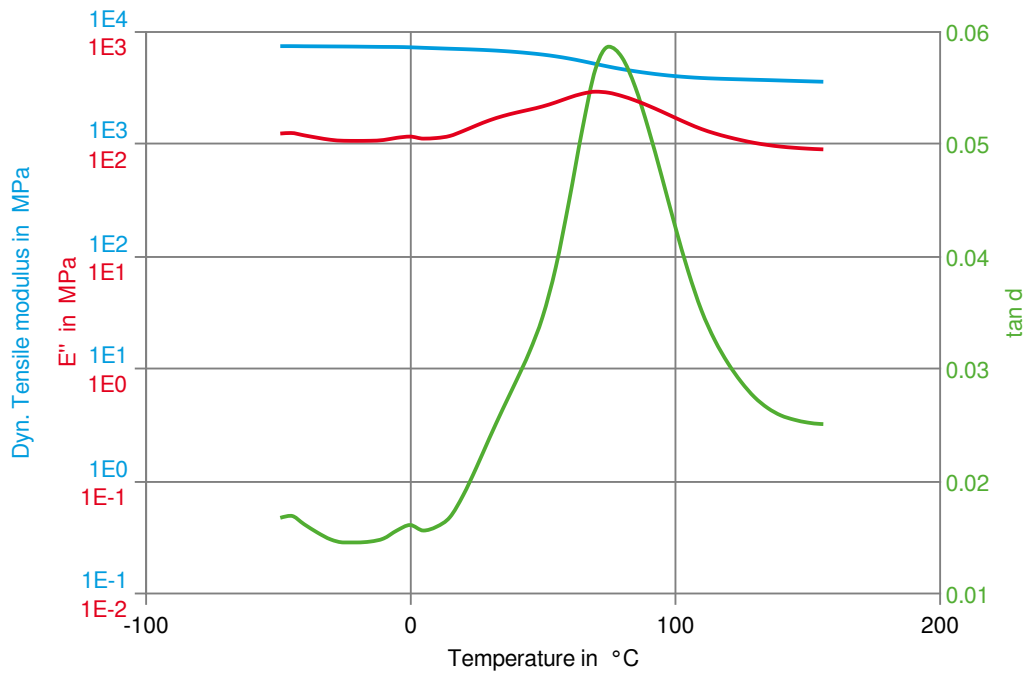

# CELSTRAN® PA66-GF40-02 AD3002 BLACK

## CELSTRAN® Long Fibre


### Stress-strain (dry)

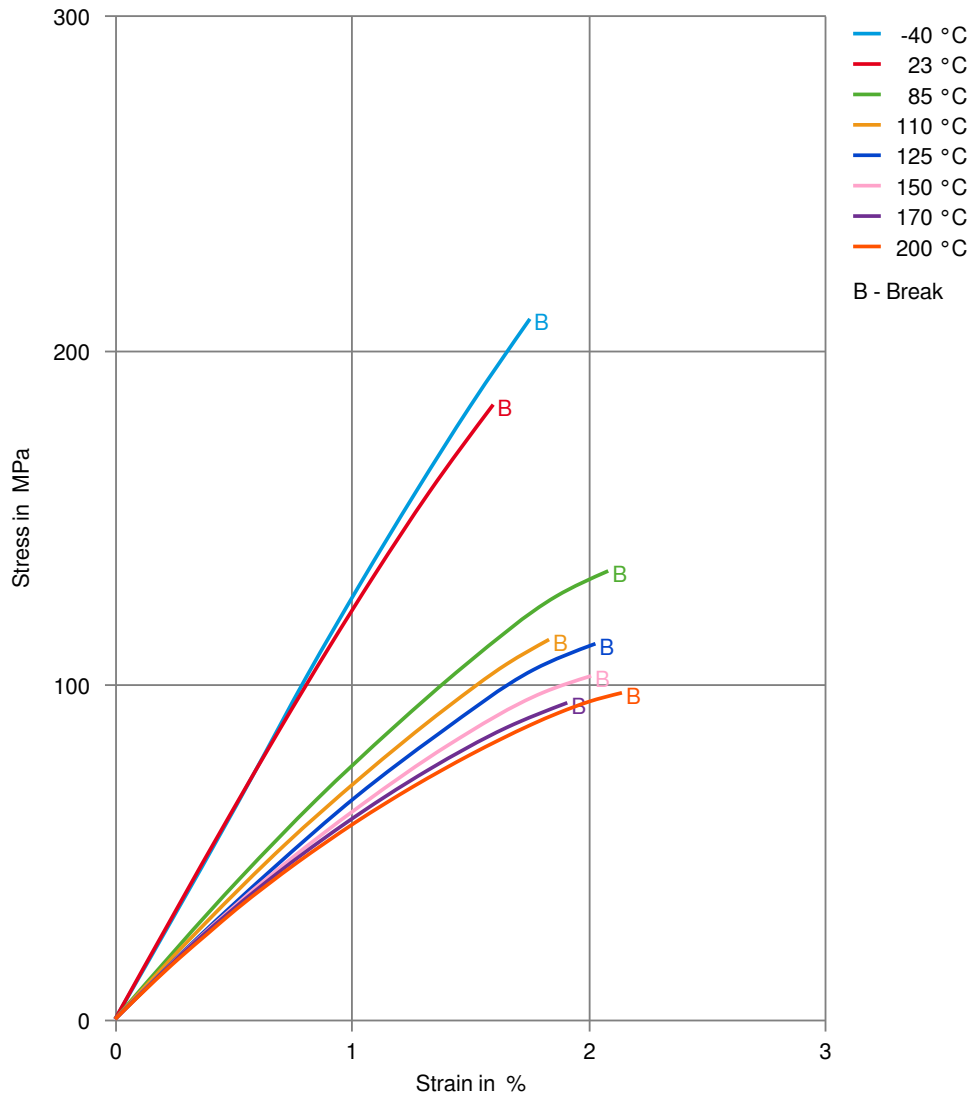

# CELSTRAN® PA66-GF40-02 AD3002 BLACK

## CELSTRAN® Long Fibre


### Stress-strain (cond.)

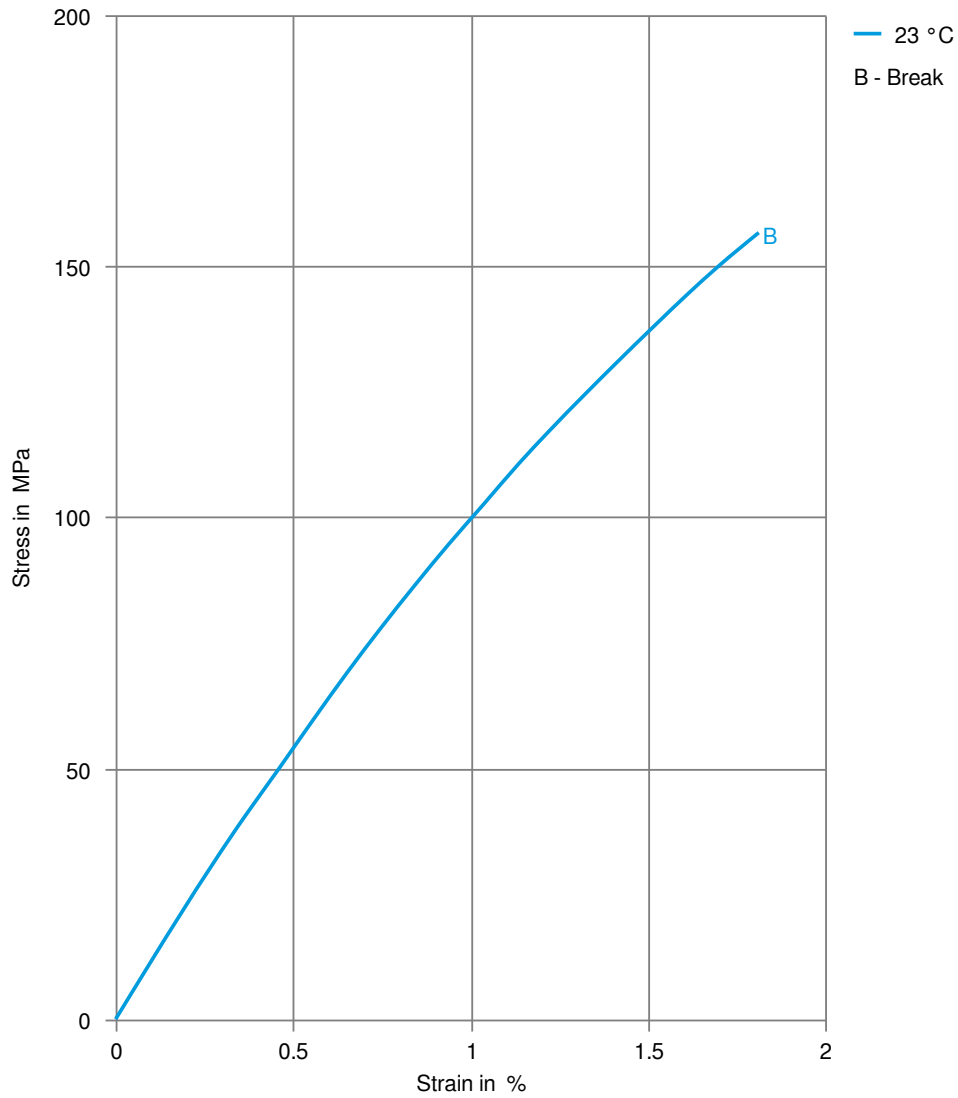

# CELSTRAN® PA66-GF40-02 AD3002 BLACK

## CELSTRAN® Long Fibre

### Secant modulus-strain (dry)

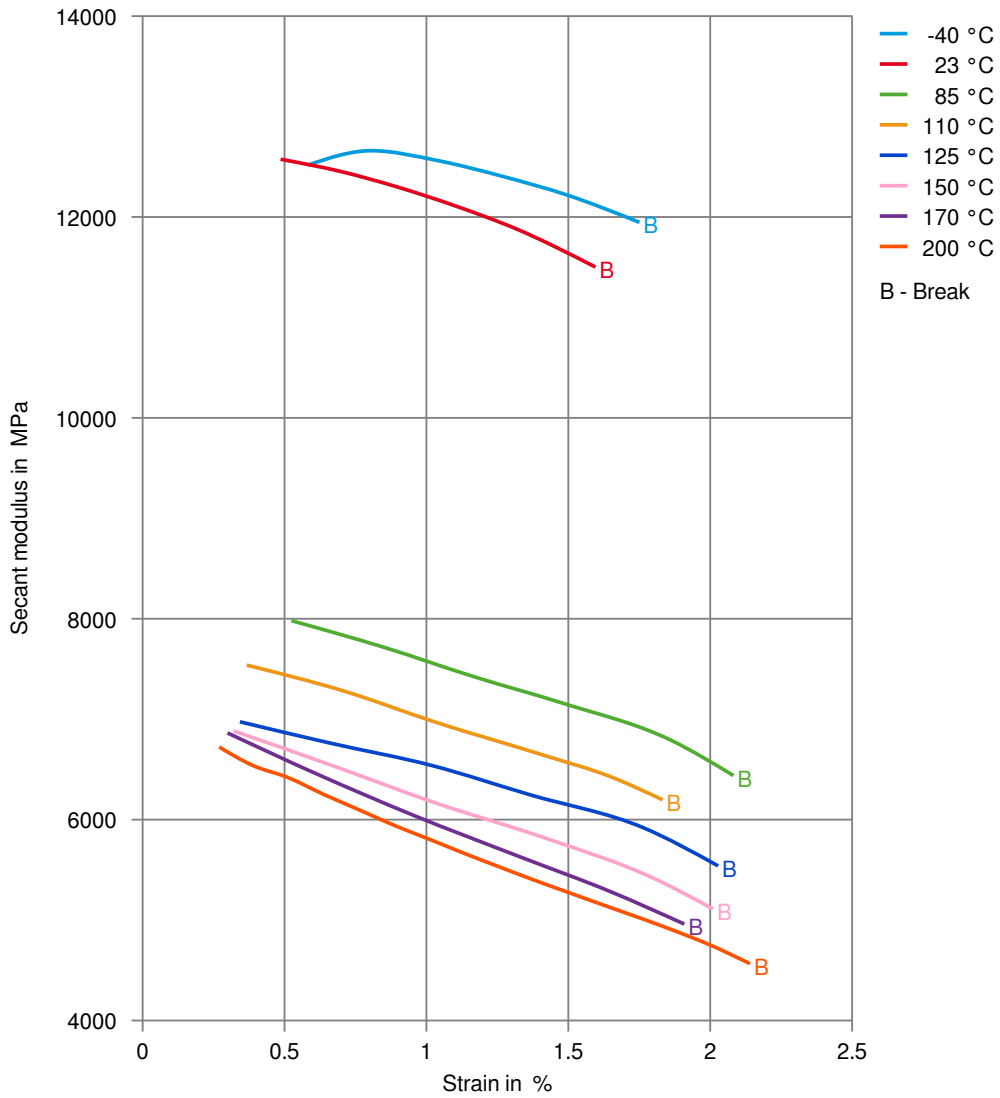

# CELSTRAN® PA66-GF40-02 AD3002 BLACK

## CELSTRAN® Long Fibre

### Secant modulus-strain (cond.)

