

CELSTRAN® PA66-GF40-02 AD3004 BLACK

CELSTRAN® Long Fibre

40% Long glass fiber reinforced, heat stabilized, Nylon 6/6

Product information

Resin Identification	PA66-LGF40	ISO 1043
Part Marking Code	>PA66-LGF40<	ISO 11469

Typical mechanical properties

	dry/cond.		
Tensile modulus	13300 / 11000	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	220 / 162	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	1.9 / 2.1	%	ISO 527-1/-2
Flexural modulus	11900 / 9000	MPa	ISO 178
Flexural strength	350 / 250	MPa	ISO 178
Charpy impact strength, 23°C	67 / 74	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	61 / -	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	38 / 30	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	31 / -	kJ/m ²	ISO 179/1eA
Poisson's ratio	0.33 / - ^[C]		

[C]: Calculated

Thermal properties

	dry/cond.		
Temperature of deflection under load, 1.8 MPa	259 / *	°C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	242 / *	°C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	17 / *	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	94 / *	E-6/K	ISO 11359-1/-2

Physical/Other properties

	dry/cond.		
Density	1460 / -	kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	295 °C
Min. melt temperature	285 °C
Max. melt temperature	305 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	70 °C
Max. mould temperature	120 °C
Hold pressure range	50 - 100 MPa


CELSTRAN® PA66-GF40-02 AD3004 BLACK

CELSTRAN® Long Fibre

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Special characteristics	Heat stabilised or stable to heat


Dynamic Tensile modulus-temperature (dry)

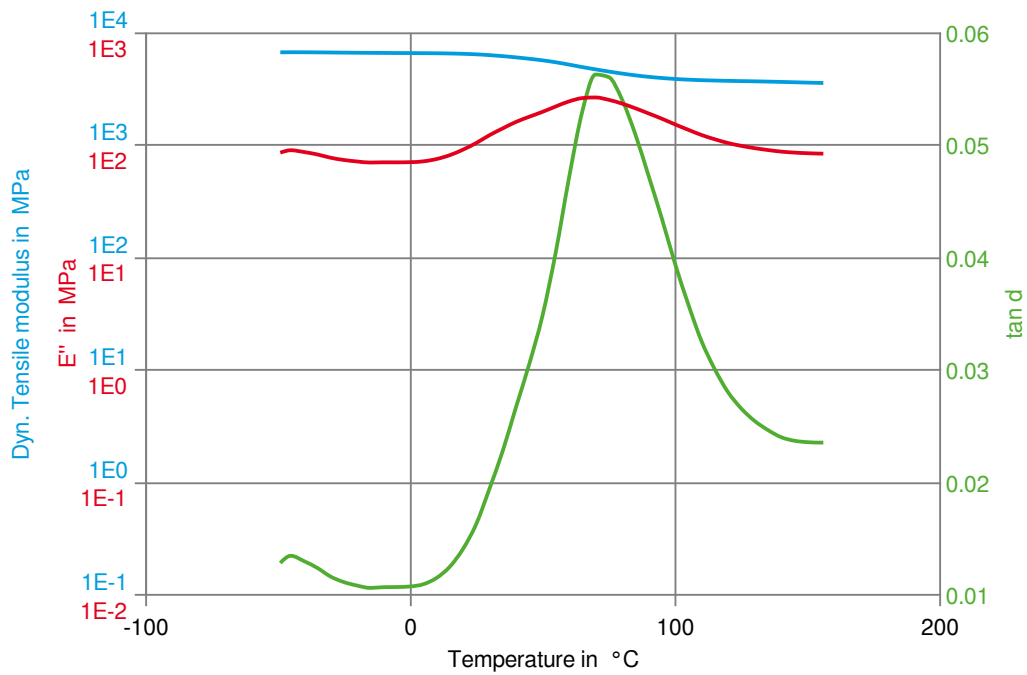

CELSTRAN® PA66-GF40-02 AD3004 BLACK

CELSTRAN® Long Fibre


Stress-strain (dry)

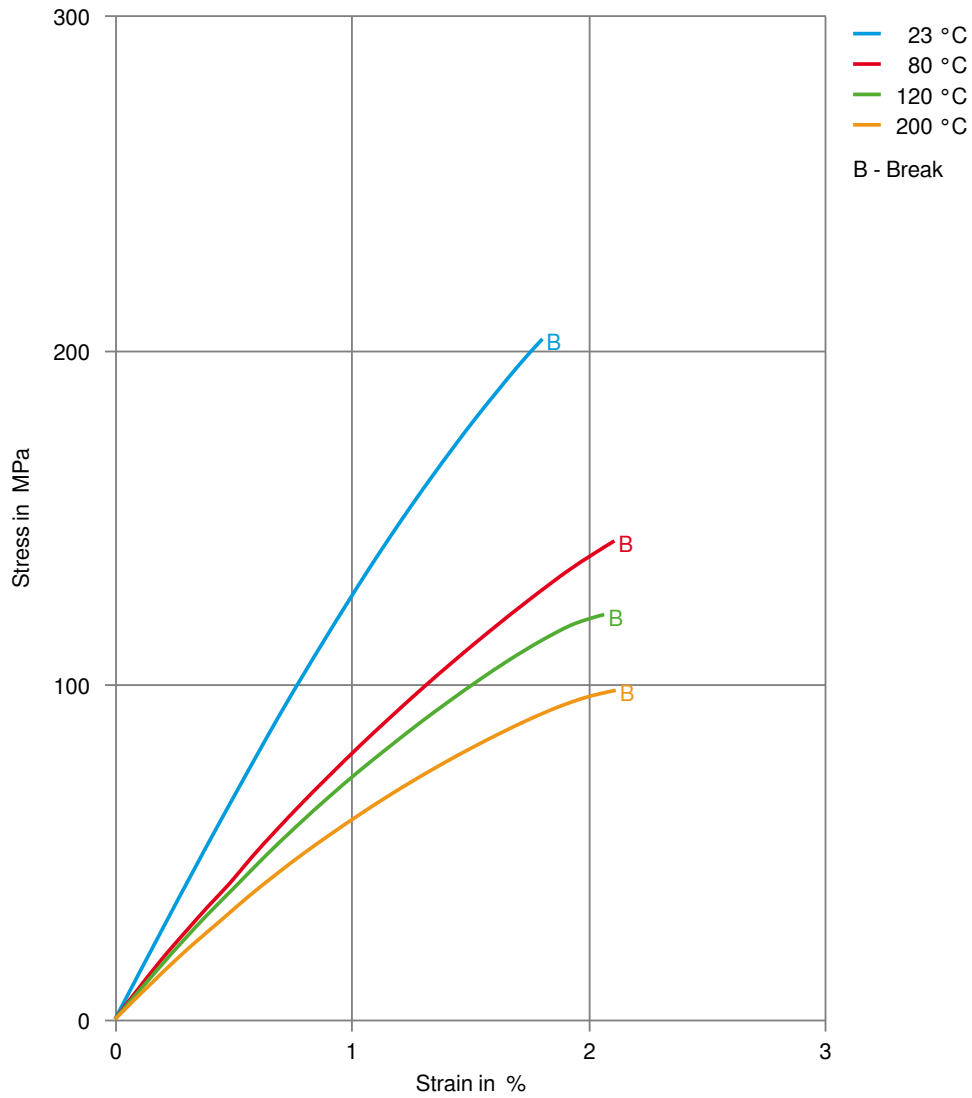

CELSTRAN® PA66-GF40-02 AD3004 BLACK

CELSTRAN® Long Fibre


Stress-strain (cond.)

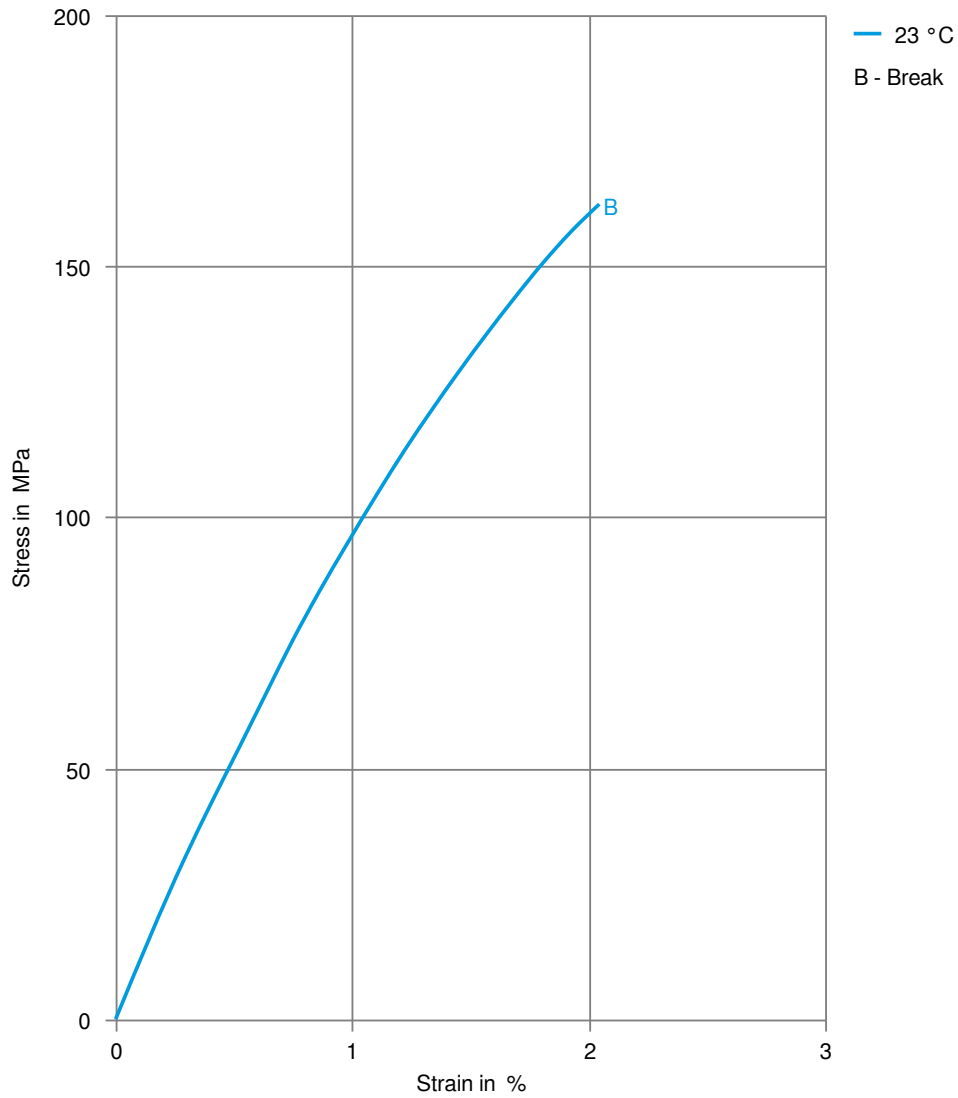

CELSTRAN® PA66-GF40-02 AD3004 BLACK

CELSTRAN® Long Fibre

Secant modulus-strain (dry)

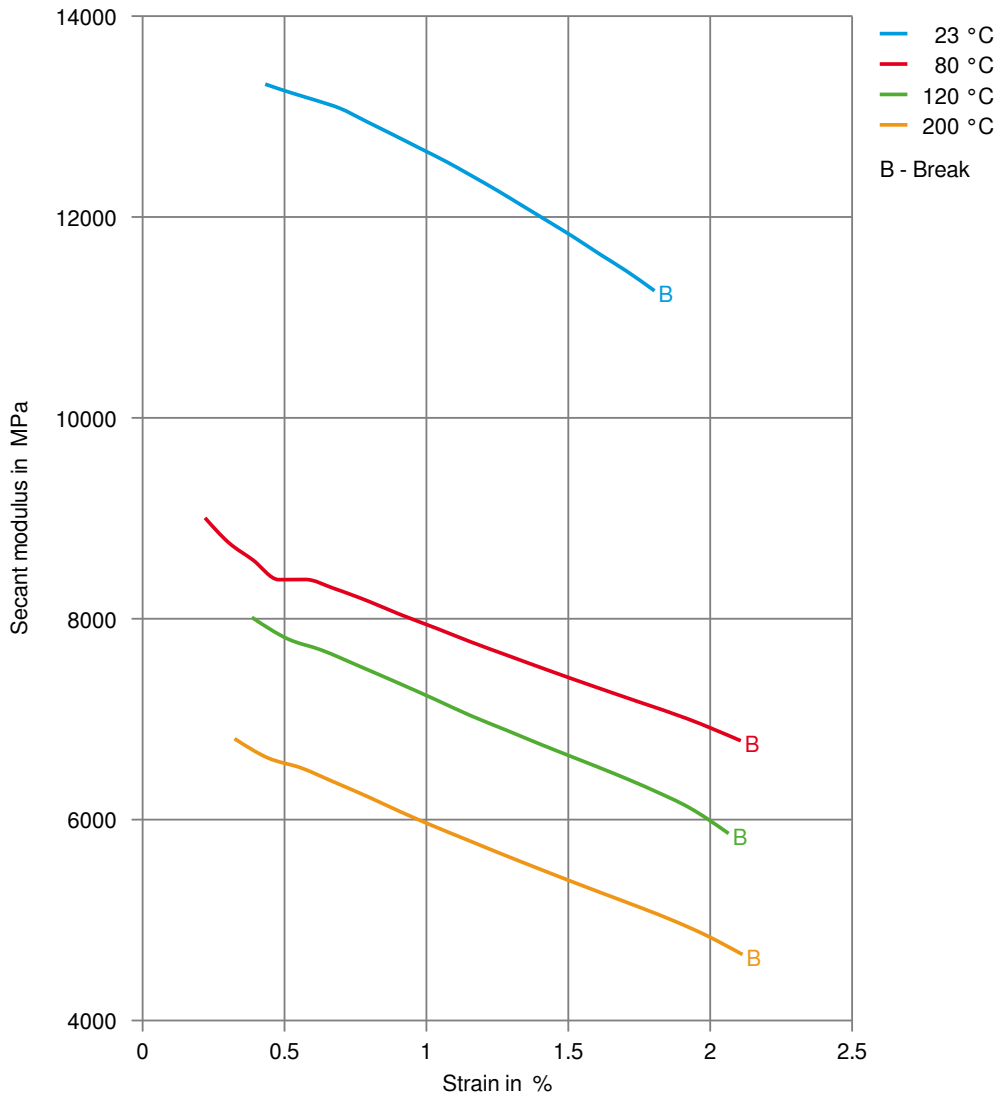

CELSTRAN® PA66-GF40-02 AD3004 BLACK

CELSTRAN® Long Fibre

Secant modulus-strain (cond.)

