

ECOMID® ARX H D05 BK 9011/A

ECOMID®

General purpose grade, based on recycled polyamide, good flexibility and toughness.

Product information

Resin Identification	PA66-I	ISO 1043
Part Marking Code	>PA66-I<	ISO 11469
Continuous Service Temperature	130 ^[C] °C	IEC 60216-1
[C]: Calculated		

Rheological properties

Moulding shrinkage range, parallel	1.4 - 1.8 %	ISO 294-4, 2577
Moulding shrinkage range, normal	1.4 - 1.8 %	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile modulus	2250/-	MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	55/-	MPa	ISO 527-1/-2
Tensile strain at break, 50mm/min	20/-	%	ISO 527-1/-2
Charpy impact strength, 23°C	45/-	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	5/-	kJ/m ²	ISO 179/1eA
Ball indentation hardness, H 961/30	110/-	MPa	ISO 2039-1
Poisson's ratio	0.39/- ^[C]		
[C]: Calculated			

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	260/*	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	65/*	°C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	155/*	°C	ISO 75-1/-2

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB/*	class	IEC 60695-11-10

Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	2/*	%	Sim. to ISO 62
Water absorption, 2mm	7.9/*	%	Sim. to ISO 62
Density	1110/-	kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.15 %
Melt Temperature Optimum	290 °C
Min. melt temperature	280 °C
Max. melt temperature	300 °C
Screw tangential speed	≤0.3 m/s
Mold Temperature Optimum	80 °C
Min. mould temperature	50 °C

ECOMID® ARX H D05 BK 901 1/A

ECOMID®

Max. mould temperature

100 °C

Characteristics

Processing

Injection Moulding


Delivery form

Granules

Special characteristics

High impact or impact modified, Heat stabilised or stable to heat


Stress-strain (dry)

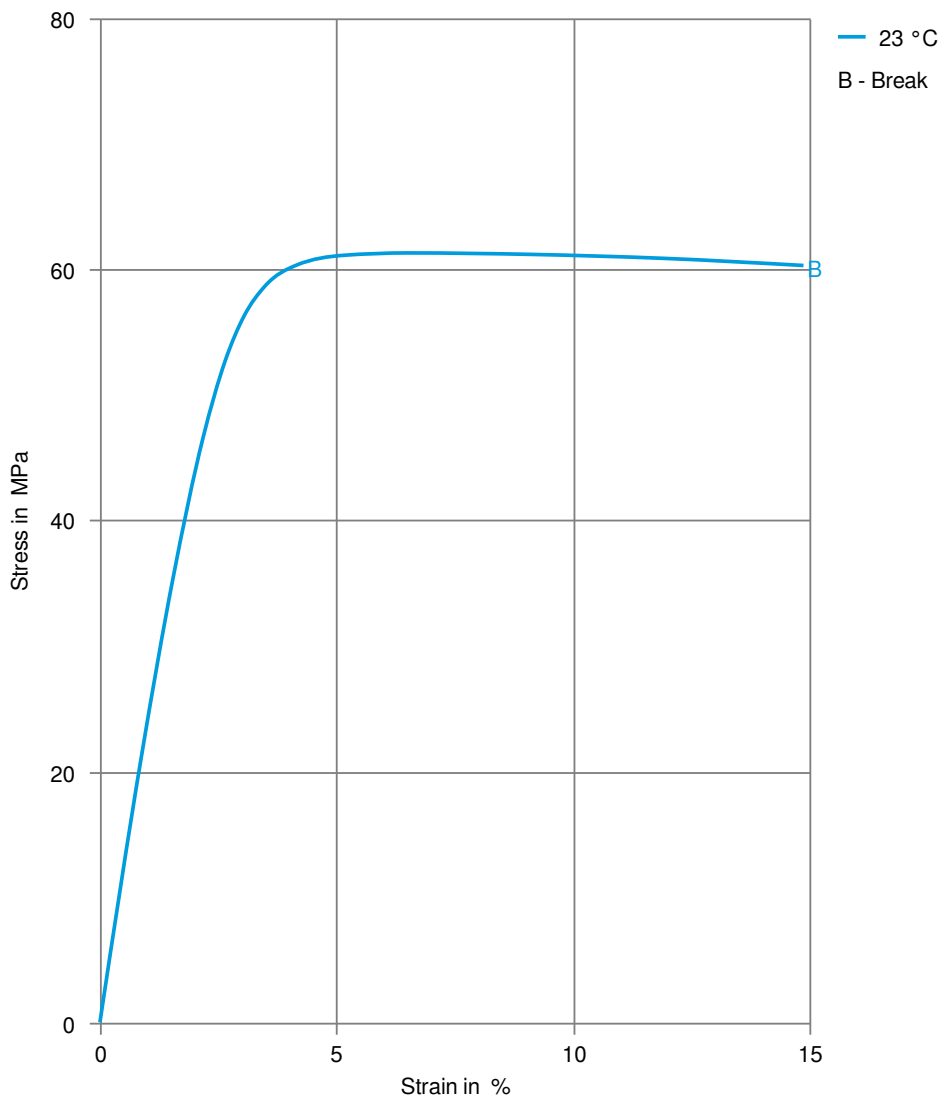

ECOMID® ARX H D05 BK 901 1/A

ECOMID®


Stress-strain (cond.)

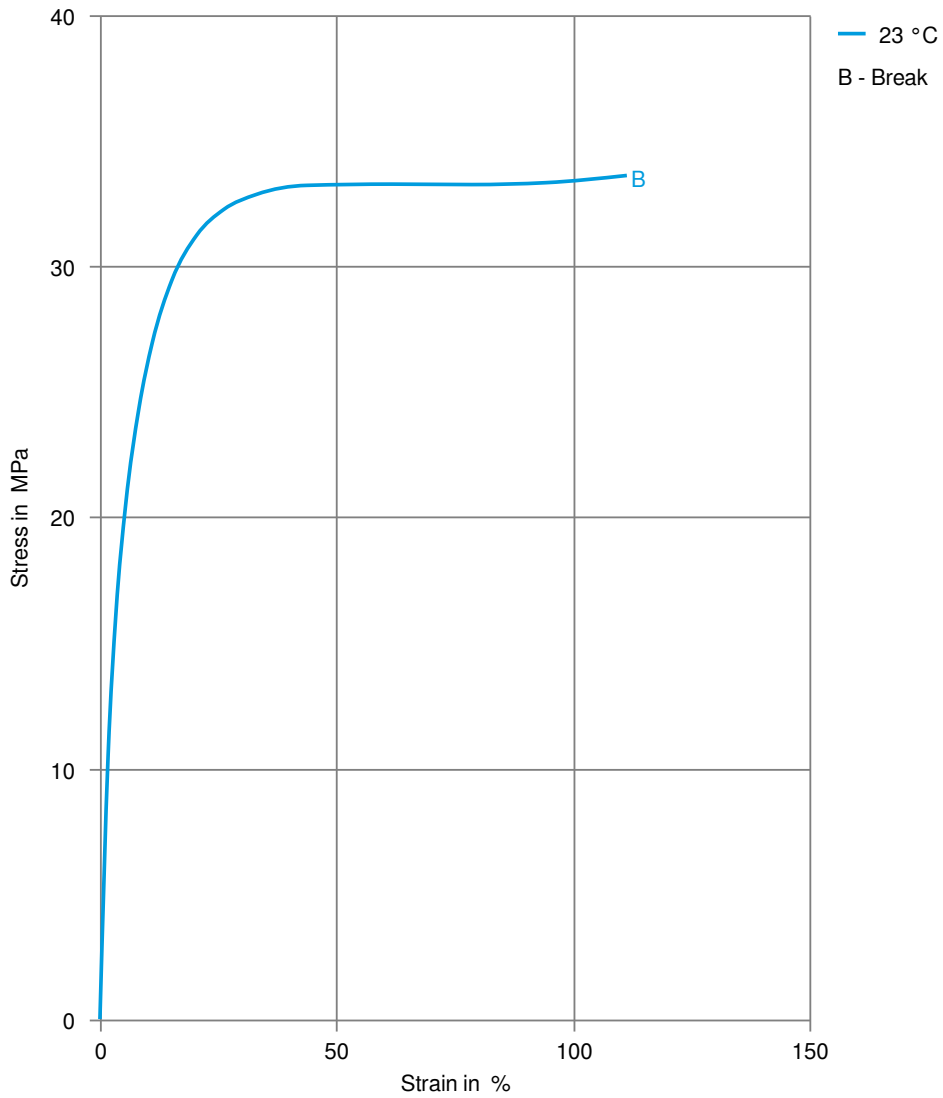

ECOMID® ARX H D05 BK 901 1/A

ECOMID®

Secant modulus-strain (dry)

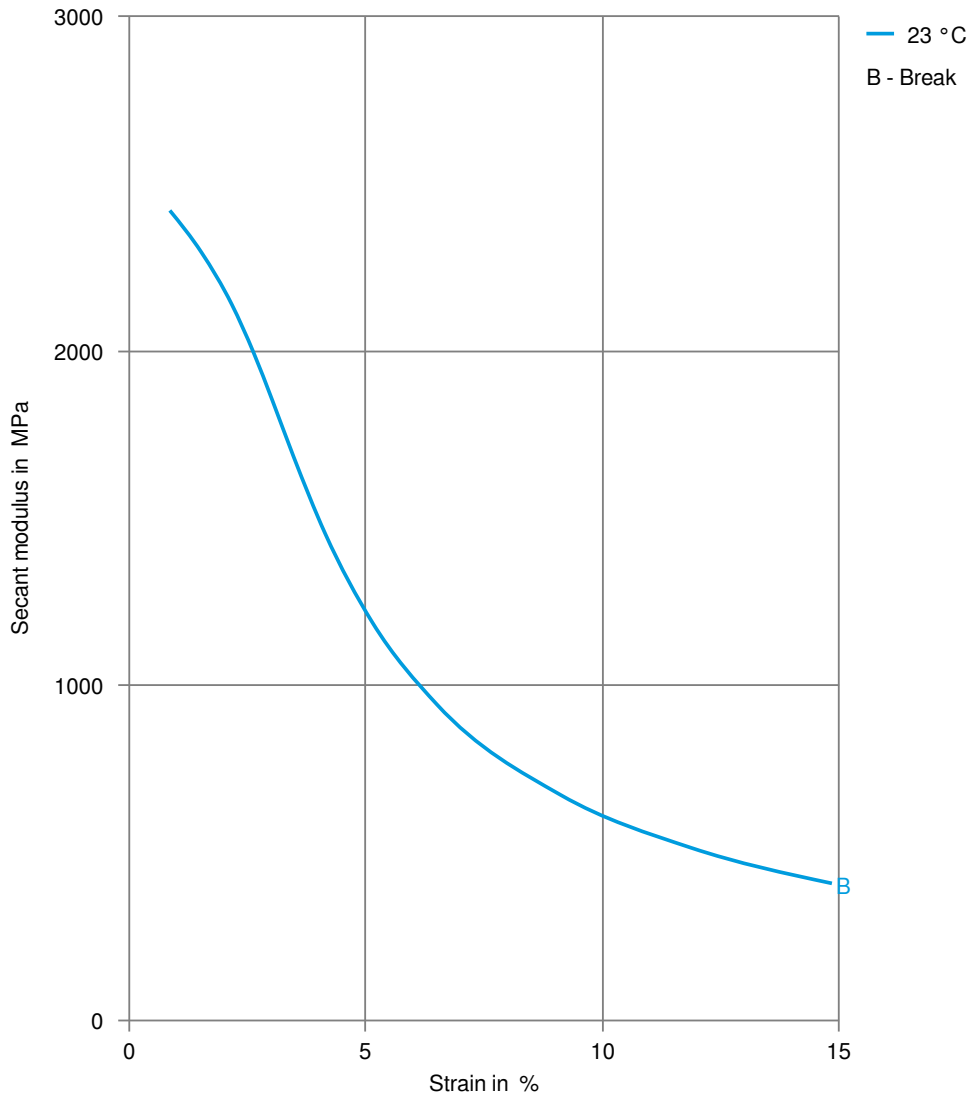

ECOMID® ARX H D05 BK 901 1/A

ECOMID®

Secant modulus-strain (cond.)

