

# FRIANYL® A3 W GF30 V0E BK 9005

## FRIANYL®

Designed for Electrical applications requiring self-extinguishing properties combined with good mechanical performances, this grade meets the most stringent safety requirements for insulating materials. Ideal for thicker walled parts.

### Product information

Resin Identification	(PA66+PA6)-GF30FR(40)	ISO 1043
Part Marking Code	>(PA66+PA6)-GF30FR(40)<	ISO 11469
Continuous Service Temperature	130 °C	IEC 60216-1

### Rheological properties

Moulding shrinkage range, parallel	0.3 - 0.6 %	ISO 294-4, 2577
Moulding shrinkage range, normal	0.6 - 0.9 %	ISO 294-4, 2577

### Typical mechanical properties

	dry/cond.		
Tensile modulus	10500 / 6500	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	150 / 100	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2.5 / 5	%	ISO 527-1/-2
Charpy impact strength, 23°C	60 / 60	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	55 / 55	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	9 / 15	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	7.5 / 7.5	kJ/m <sup>2</sup>	ISO 179/1eA
Poisson's ratio	0.34 / 0.35 <sup>[C]</sup>		

[C]: Calculated

### Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	260 / *	°C	ISO 11357-1/-3

### Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	V-0 / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
UL recognition	yes / *		UL 94
Burning Behav. at thickness h	V-0 / *	class	IEC 60695-11-10
Thickness tested	3 / *	mm	IEC 60695-11-10
UL recognition	yes / *		UL 94
Glow Wire Flammability Index, 0.75mm	960 / -	°C	IEC 60695-2-12
Glow Wire Flammability Index, 3.0mm	960 / -	°C	IEC 60695-2-12

### Electrical properties

	dry/cond.		
Volume resistivity	1E14 / -	Ohm.m	IEC 62631-3-1
Surface resistivity	* / 1E13	Ohm	IEC 62631-3-2
Electric strength	45 / -	kV/mm	IEC 60243-1
Electric strength, Direct Current	18.7	kV/mm	IEC 60243-2
Comparative tracking index, 100 drops	600		IEC 60112

# FRIANYL® A3 W GF30 V0E BK 9005

## FRIANYL®

### Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	1.4 / *	%	Sim. to ISO 62
Water absorption, 2mm	4.9 / *	%	Sim. to ISO 62
Density	1410 / -	kg/m <sup>3</sup>	ISO 1183


### Characteristics

Processing	Injection Moulding
Delivery form	Granules
Additives	Flame retardant, Non-halogenated/Red phosphorous free flame retardant, Low halide content
Special characteristics	Flame retardant, Heat stabilised or stable to heat, Thermal shock resistant

# FRIANYL® A3 W GF30 V0E BK 9005

FRIANYL®


## Stress-strain (dry)

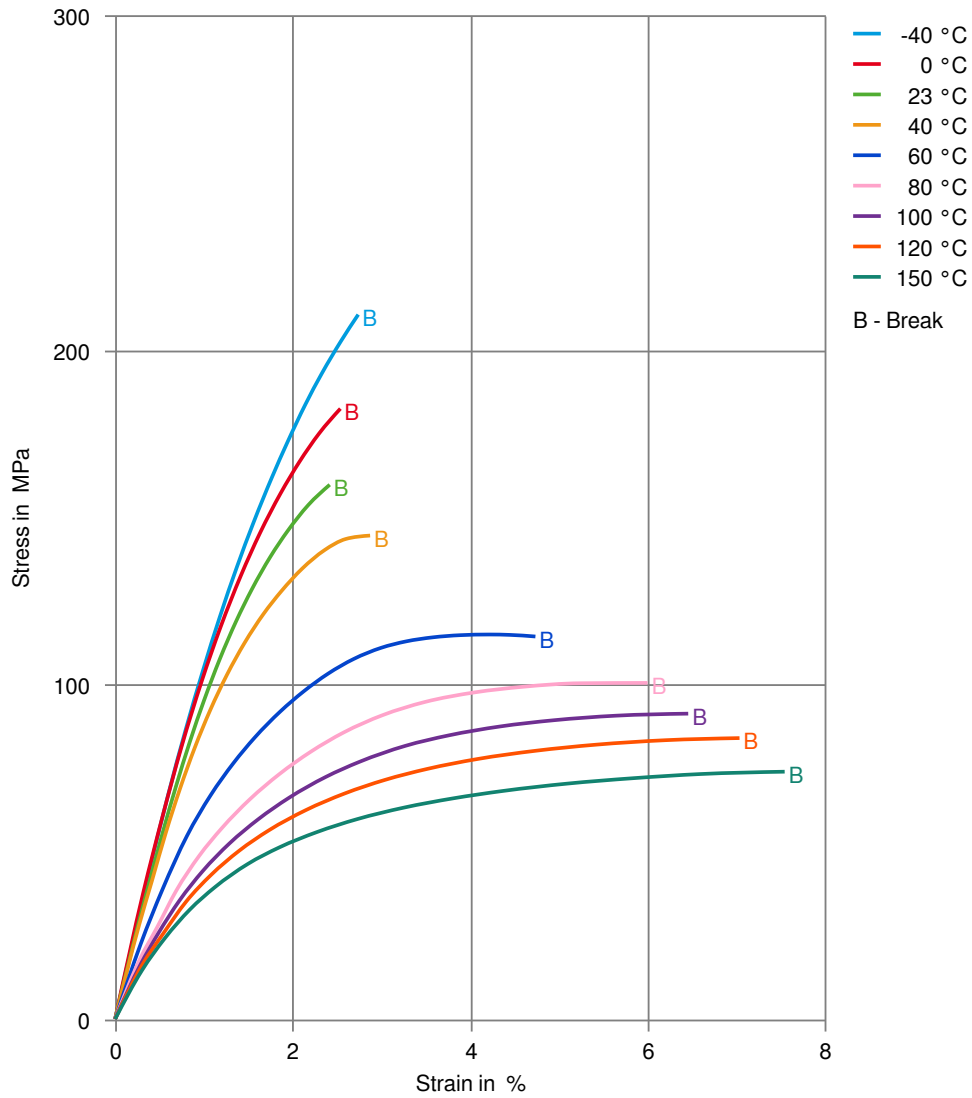

# FRIANYL® A3 W GF30 V0E BK 9005

FRIANYL®


## Stress-strain (cond.)

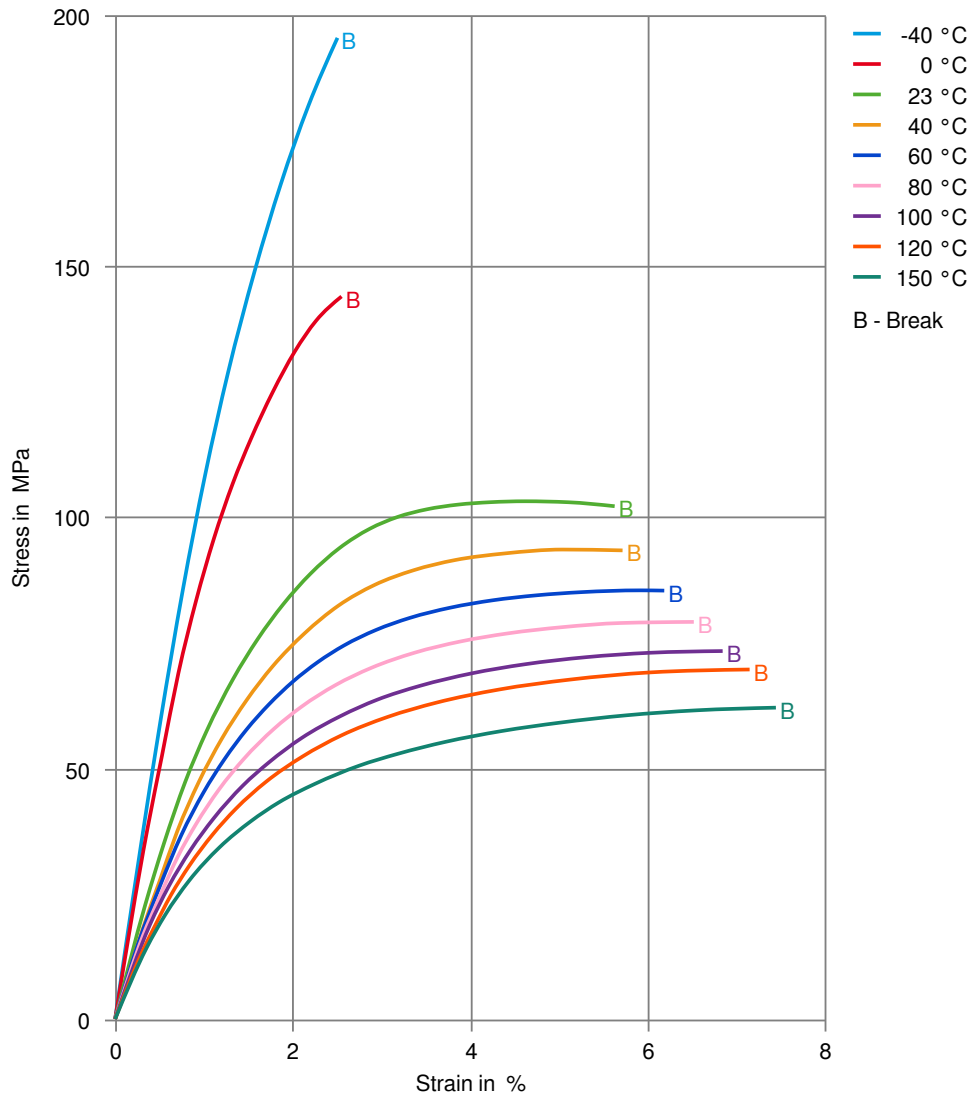

# FRIANYL® A3 W GF30 V0E BK 9005

FRIANYL®

## Secant modulus-strain (dry)

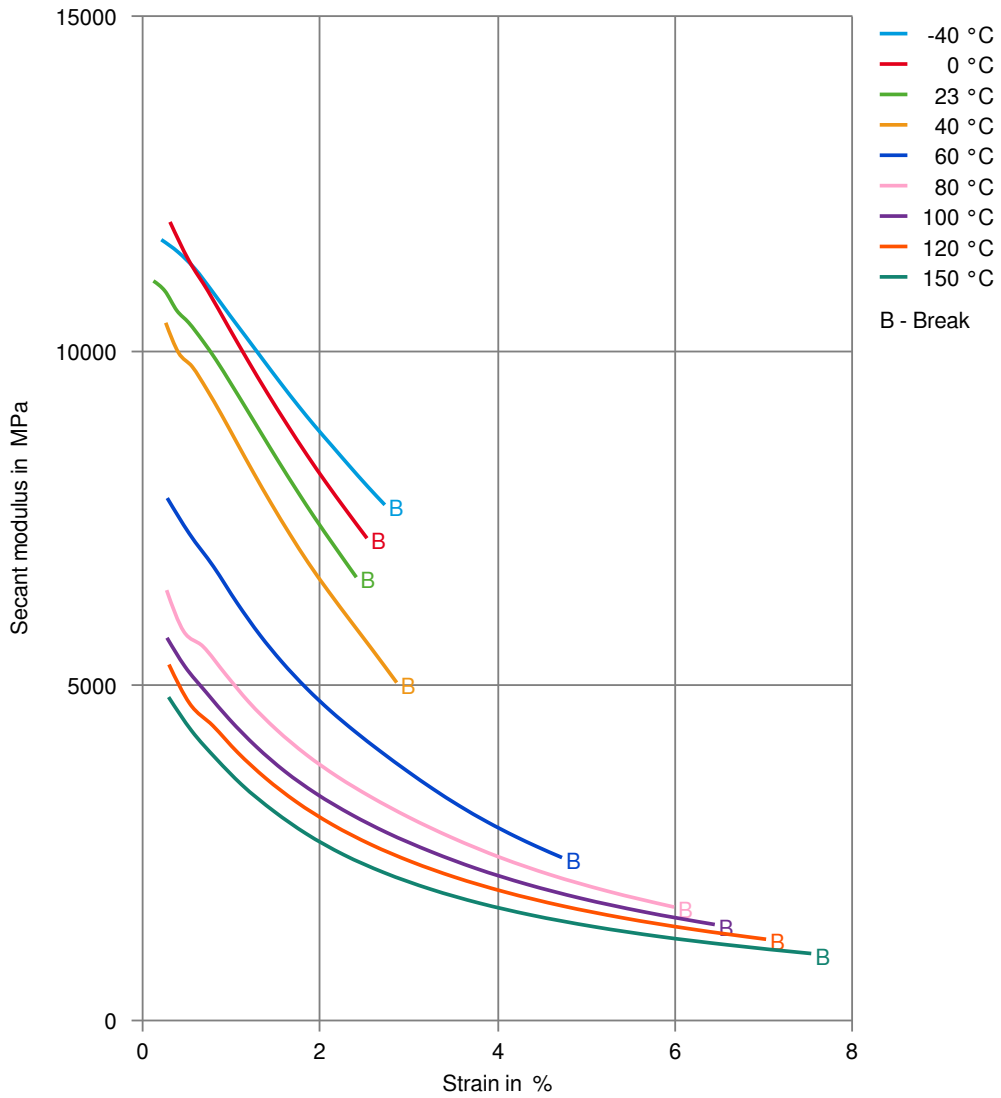

# FRIANYL® A3 W GF30 V0E BK 9005

FRIANYL®

## Secant modulus-strain (cond.)

