

ZYTEL® 74G50ARX ECO-R 311 BLK1

NYLON RESIN

Zytel® 74G50ARX ECO-R 311 BLK1 incorporates 30% of post-industrial recycled content by weight in the finished product. It is a 50% Glass Reinforced, Heat Stabilized, Polyamide 66 designed for Automotive industry.

Product information

Resin Identification	(PA66+PA6)-GF50(R30)	ISO 1043
Part Marking Code	>(PA66+PA6)-GF50(R30)<	ISO 11469
Continuous Service Temperature	130 °C	IEC 60216-1

Rheological properties

Moulding shrinkage range, parallel	0.1 - 0.5 %	ISO 294-4, 2577
Moulding shrinkage range, normal	0.5 - 0.9 %	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile modulus	16300 / 12000	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	200 / 140	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2.3 / 3.3	%	ISO 527-1/-2
Flexural modulus	14500 / -	MPa	ISO 178
Flexural strength	300 / -	MPa	ISO 178
Charpy impact strength, 23°C	75 / 80	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	45 / -	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	14 / 16	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	8.5 / -	kJ/m ²	ISO 179/1eA
Ball indentation hardness, H 961/30	230 / -	MPa	ISO 2039-1
Poisson's ratio	0.33 / 0.33 ^[C]		

[C]: Calculated

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	260 / *	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	235 / *	°C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	250 / *	°C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	20 / *	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	80 / *	E-6/K	ISO 11359-1/-2

Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	1.2 / *	%	Sim. to ISO 62
Water absorption, 2mm	4.1 / *	%	Sim. to ISO 62
Density	1560 / -	kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.15 %

ZYTEL® 74G50ARX ECO-R 311 BLK1

NYLON RESIN

Melt Temperature Optimum	285 °C
Min. melt temperature	275 °C
Max. melt temperature	295 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	70 °C
Max. mould temperature	120 °C

Characteristics

Processing	Injection Moulding
Special characteristics	Heat stabilised or stable to heat
Sustainability	Recycled Content

Additional information

Injection molding

Preprocessing

PA materials, stocked in a moisture-proof packaging, can be processed without drying; however, it is always recommended drying the product that comes from a large package (e.g. Octabin). The moisture content suggested for the injection molding process should be lower than 0.15%, according to the grade and to the molded part characteristics. The materials containing flame retardants should have moisture content below 0.10%. Red phosphorous containing grades must always be dried below 0.08%. The drying time depends on the moisture content and the drying conditions. Typically, 4-8 hours at 80-90°C using dehumidified air (dew point of -20°C) are suitable conditions for a starting moisture content of 0.20%-0.40%.

Processing

The following conditions apply to a standard injection molding process. Machine temperatures: barrel 265-290°C (PA66), 235-270°C (PA6), nozzle and hot runners up to 300°C (up to 290°C products with flame retardants). Mold temperatures: 60-80°C, (80-100°C highly reinforced grades). Back pressure: typically, 5-10 bar (hydraulic pressure). Temperatures exceeding 300°C and long residence time could lead to additives degradation and brittleness of the material. In case of gas generation in the melt, please verify moisture content and processing temperatures. Usage of regrind is possible depending on the molded part characteristics. For further details, please refer to the document 'Instructions for injection molding' or contact our technical support team.

Postprocessing

PA materials reach their final performance with a water content of about 1.5 to 3.5% by weight, depending on the type. This percentage corresponds to the point of equilibrium between the rates of absorption and desorption of moisture. After molding, in favorable environmental conditions, a part can quickly absorb moisture up to 0.5-1.0%, while the equilibrium will be reached during its life. A conditioning treatment can accelerate further the initial water absorption of the


ZYTEL® 74G50ARX ECO-R 311 BLK1

NYLON RESIN

molded parts. Conditioning is usually carried out in hot and humid environment (for example 50 °C, 100% RH), inside climatic chambers. Slight dimensional variations (increase in volume due to the water absorbed) must be considered, especially in unfilled grades. Post-treatments of parts may also include the annealing (60-80 °C in oven, up to four hours). This procedure can be useful to relax any internal stresses.

51016039.21023756.21023755


Stress-strain (dry)

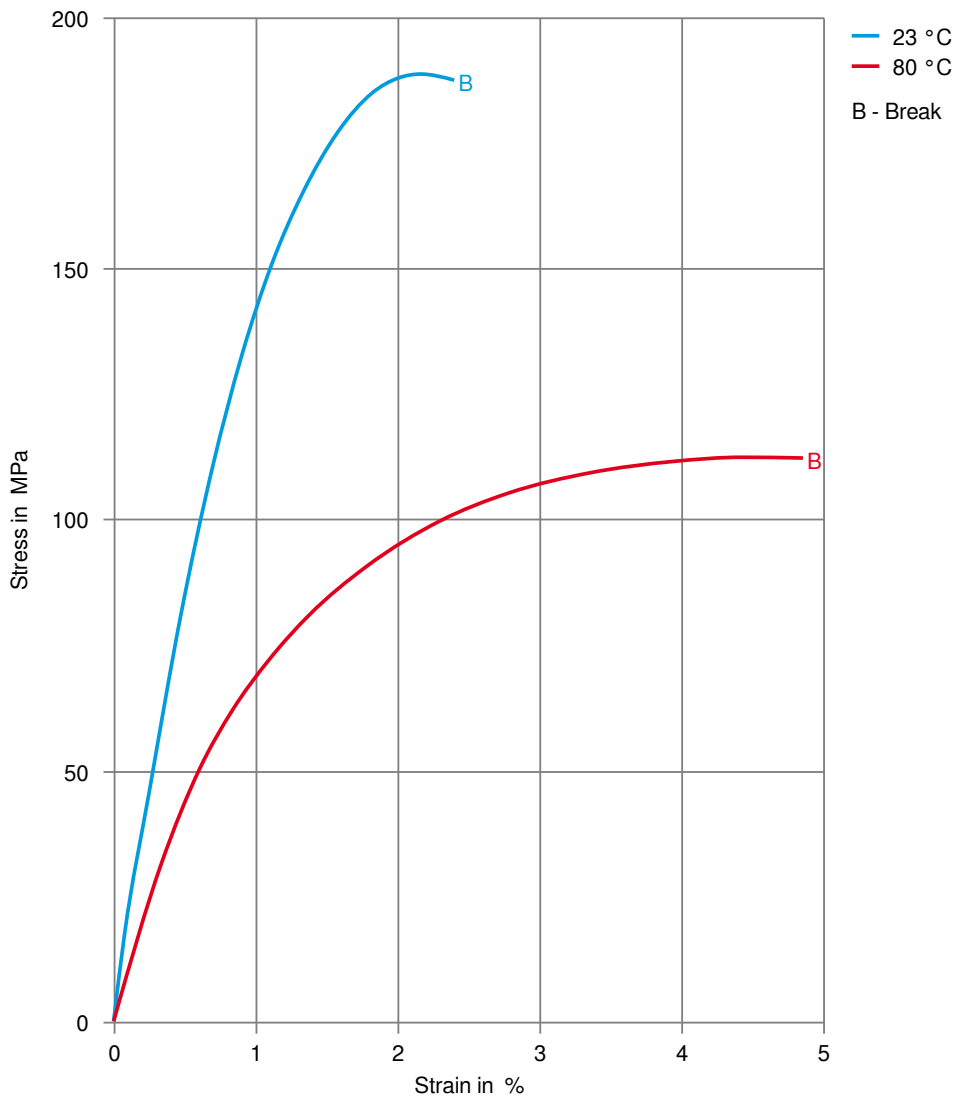

ZYTEL® 74G50ARX ECO-R 311 BLK1

NYLON RESIN


Stress-strain (cond.)

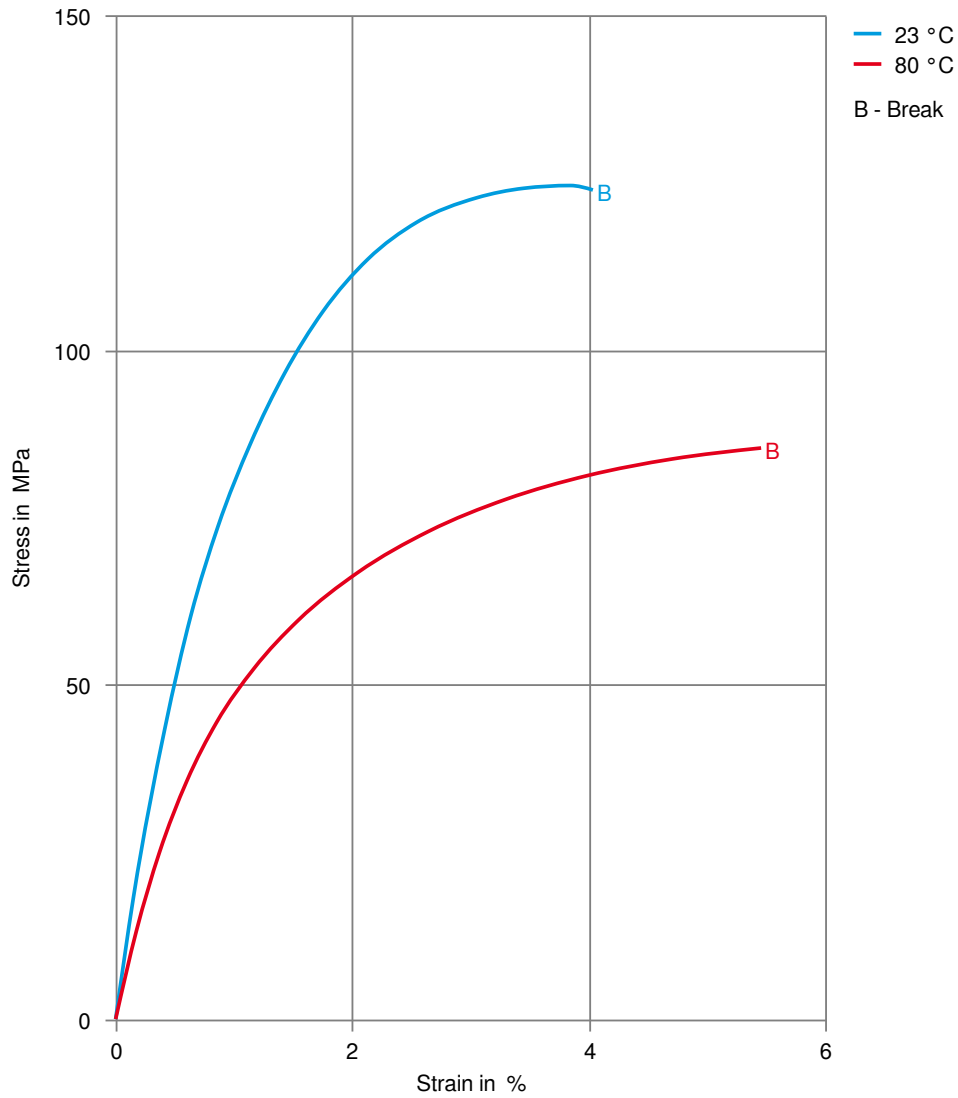

ZYTEL® 74G50ARX ECO-R 311 BLK1

NYLON RESIN

Secant modulus-strain (dry)

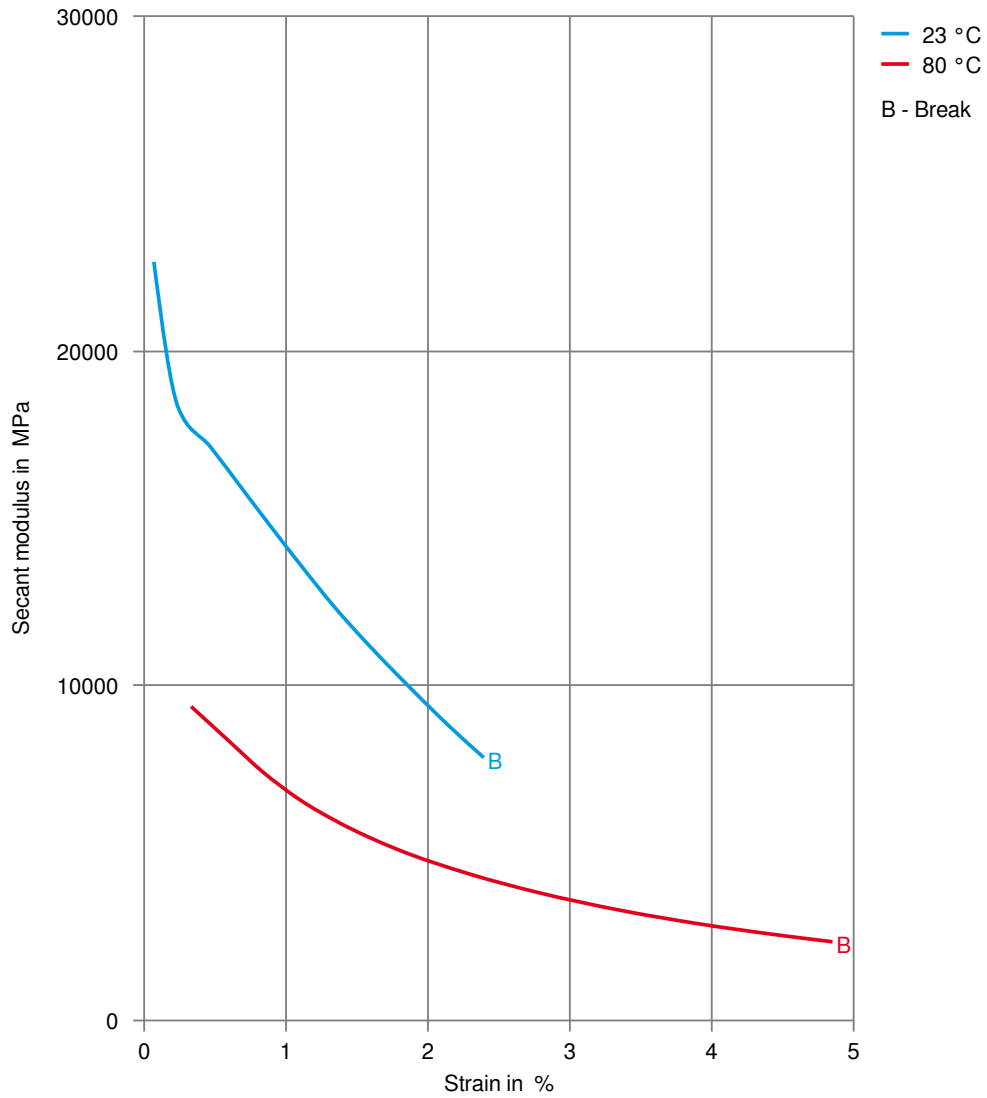

ZYTEL® 74G50ARX ECO-R 311 BLK1

NYLON RESIN

Secant modulus-strain (cond.)

