

Zytel® 70G13HS1L NC010

NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® 70G13HS1L NC010 is a 13% glass fiber reinforced, heat stabilised polyamide 66 resin for injection moulding.

Product information

Resin Identification	PA66-GF13	ISO 1043
Part Marking Code	>PA66-GF13<	ISO 11469
ISO designation	ISO 16396-PA66,GF13,M1GHNR,S14-050	

Rheological properties

	dry/cond.		
Viscosity number	137 ^[1] /*	cm ³ /g	ISO 307, 1628
Moulding shrinkage, parallel	0.7 / -	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.2 / -	%	ISO 294-4, 2577

[1]: formic acid

Typical mechanical properties

	dry/cond.		
Tensile modulus	5500 / 3500	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	120 / 75	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	3 / 13	%	ISO 527-1/-2
Flexural modulus	4900 / 2900	MPa	ISO 178
Flexural strength	190 / 100	MPa	ISO 178
Flexural stress at 3.5%	165 / 90	MPa	ISO 178
Tensile creep modulus, 1h	* / 3300	MPa	ISO 899-1
Tensile creep modulus, 1000h	* / 2200	MPa	ISO 899-1
Charpy impact strength, 23°C	32 / 70	kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	30 / 30	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	5 / 6	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	- / 4	kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	4.5 / -	kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	4.5 / 4	kJ/m ²	ISO 180/1A
Izod notched impact strength, -30°C	4.5 / 3.0	kJ/m ²	ISO 180/1A
Izod notched impact strength, -40°C	4.5 / 3.0	kJ/m ²	ISO 180/1A
Izod impact strength, 23°C	40 / 55	kJ/m ²	ISO 180/1U
Izod impact strength, -30°C	35 / 28	kJ/m ²	ISO 180/1U
Poisson's ratio	0.35 / 0.37		

Zytel® 70G13HS1L NC010

NYLON RESIN

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	262 / *	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	80 / 20	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	235 / *	°C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	255 / *	°C	ISO 75-1/-2
Ball pressure test	220 / -	°C	IEC 60695-10-2
Coeff. of linear therm. expansion, parallel, -40-23°C	42 / *	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	40 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, parallel, 55-160°C	26 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, -40-23°C	77 / *	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	93 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, 55-160°C	149 / *	E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.16	W/(m K)	ISO 22007-2
Effective thermal diffusivity, flow	8.5E-8	m ² /s	ISO 22007-4
Specific heat capacity of melt	2370	J/(kg K)	ISO 22007-4
RTI, electrical, 0.75mm	140	°C	UL 746B
RTI, electrical, 1.5mm	140	°C	UL 746B
RTI, electrical, 3.0mm	140	°C	UL 746B
RTI, impact, 0.75mm	125	°C	UL 746B
RTI, impact, 1.5mm	125	°C	UL 746B
RTI, impact, 3.0mm	125	°C	UL 746B
RTI, strength, 0.75mm	140	°C	UL 746B
RTI, strength, 1.5mm	140 / *	°C	UL 746B
RTI, strength, 3.0mm	140	°C	UL 746B

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
UL recognition	yes / *		UL 94
Burning Behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.71 / *	mm	IEC 60695-11-10
UL recognition	yes / *		UL 94
Glow Wire Flammability Index, 0.75mm	650 / - ^[DS]	°C	IEC 60695-2-12
Glow Wire Flammability Index, 1.5mm	650 / - ^[DS]	°C	IEC 60695-2-12
Glow Wire Flammability Index, 3.0mm	800 / - ^[DS]	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	675 / - ^[DS]	°C	IEC 60695-2-13
FMVSS Class	SE		ISO 3795 (FMVSS 302)

[DS]: Derived from similar grade

Electrical properties

	dry/cond.		
Dissipation factor, 100Hz	70 / 2400	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	70 / 2400	E-4	IEC 62631-2-1
Volume resistivity	>1E13 / -	Ohm.m	IEC 62631-3-1

Zytel® 70G13HS1L NC010

NYLON RESIN

Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	2.2 / *	%	Sim. to ISO 62
Water absorption, 2mm	7.6 / *	%	Sim. to ISO 62
Water absorption, Immersion 24h	1.7 ^[2] / *	%	Sim. to ISO 62
Density	1230 / -	kg/m ³	ISO 1183
[2]: 3.2mm wall thickness			

VDA Properties

Emission of organic compounds	6 µgC/g	VDA 277
-------------------------------	---------	---------

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	295 °C
Min. melt temperature	285 °C
Max. melt temperature	305 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	70 °C
Max. mould temperature	120 °C
Hold pressure range	50 - 100 MPa
Hold pressure time	3 s/mm
Ejection temperature	210 °C

Characteristics

Processing	Injection Moulding
Delivery form	Granules
Additives	Release agent
Special characteristics	Heat stabilised or stable to heat


Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
General Motors	GMW3038P-PA66-GF15H	Natural
General Motors	GMW3038P-PA66-GF15H	Black
Hyundai	MS941-03 Type A-2	
Stellantis	B62 0300 / 61/212M+/215E+/H112/13/C1B	CPN2125, 01994_10_00177
Stellantis - Chrysler	MS.50017 / CPN-2125	Natural
VW Group	VW 50133 PA66-3-A	

Zytel® 70G13HS1L NC010

NYLON RESIN


Stress-strain (dry)
(measured on Zytel® 70G13L NC010)

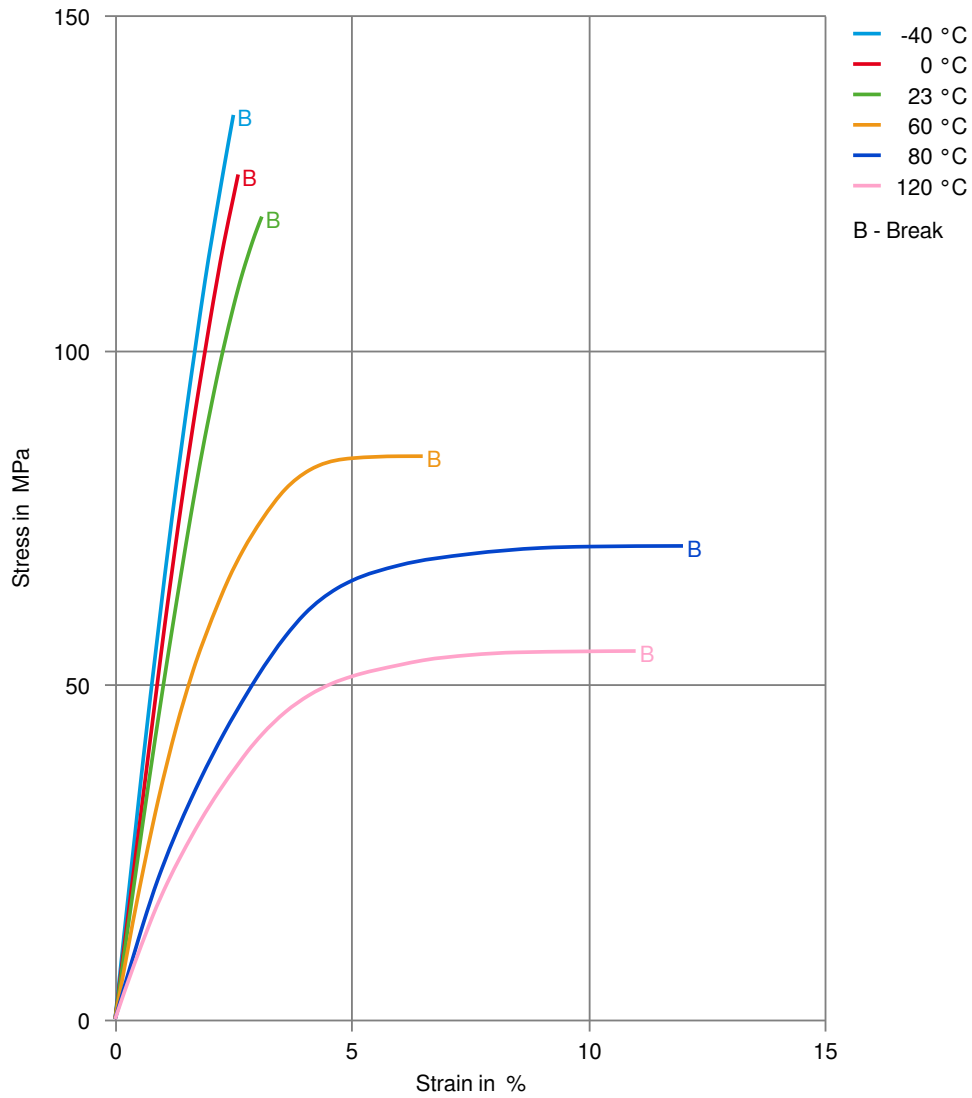

Zytel® 70G13HS1L NC010

NYLON RESIN


Stress-strain (cond.)
(measured on Zytel® 70G13L NC010)

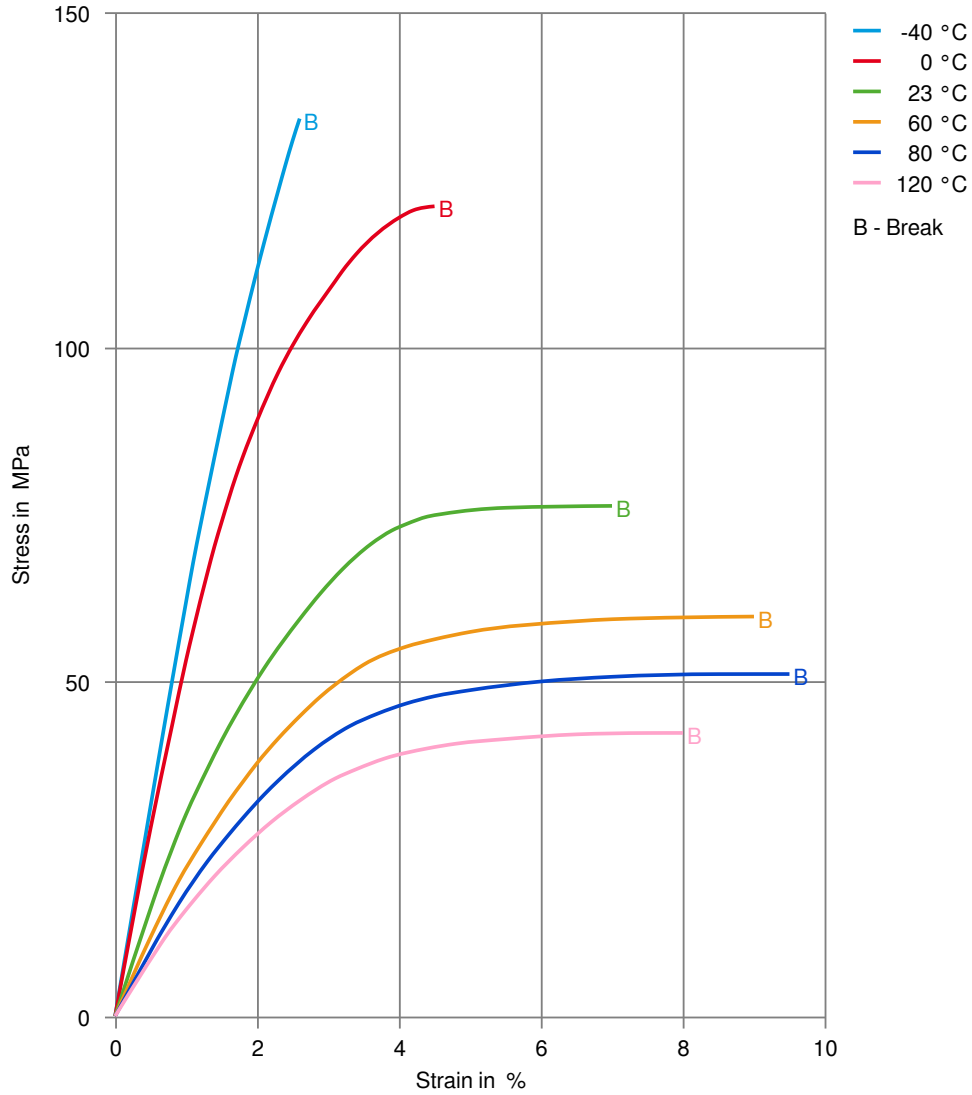

Zytel® 70G13HS1L NC010

NYLON RESIN


Secant modulus-strain (dry)
(measured on Zytel® 70G13L NC010)

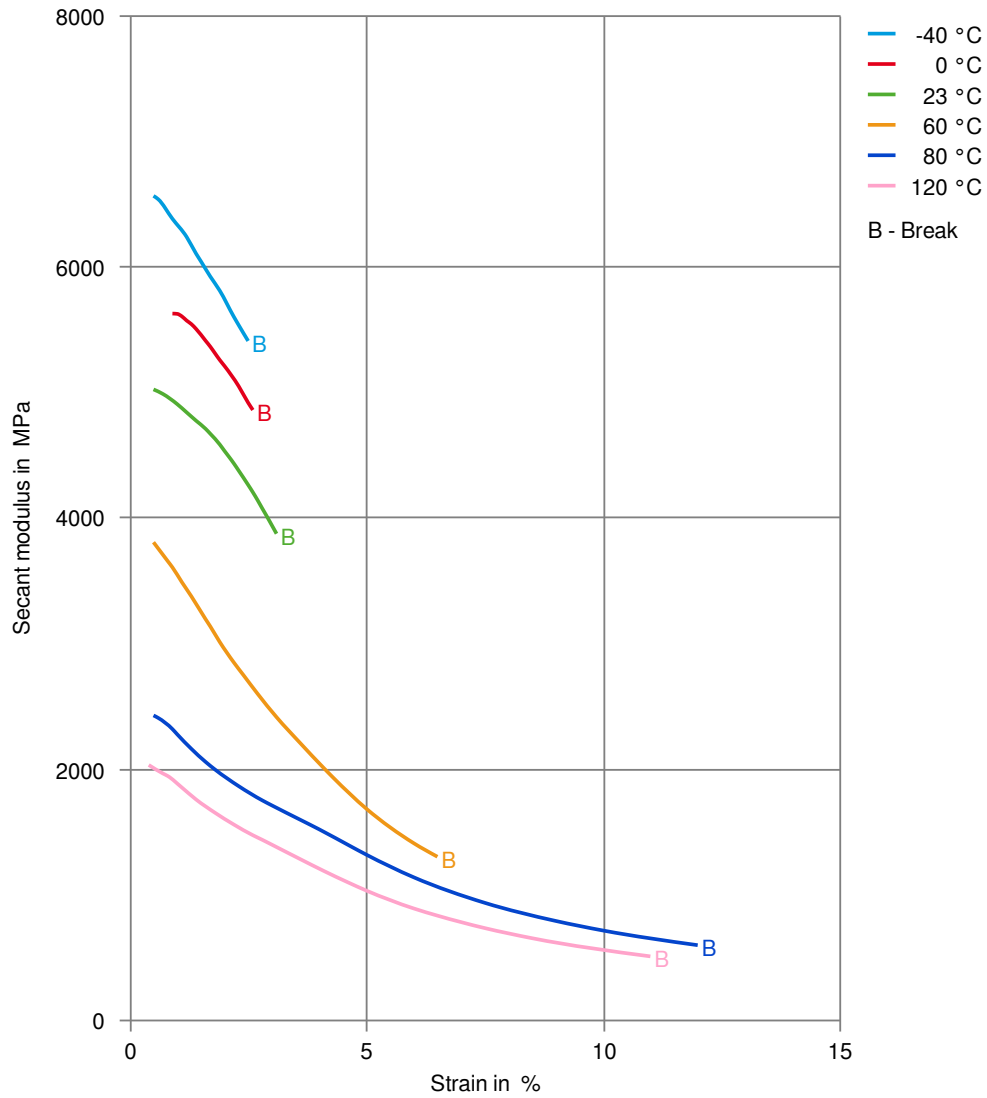

Zytel® 70G13HS1L NC010

NYLON RESIN

Secant modulus-strain (cond.)
(measured on Zytel® 70G13L NC010)

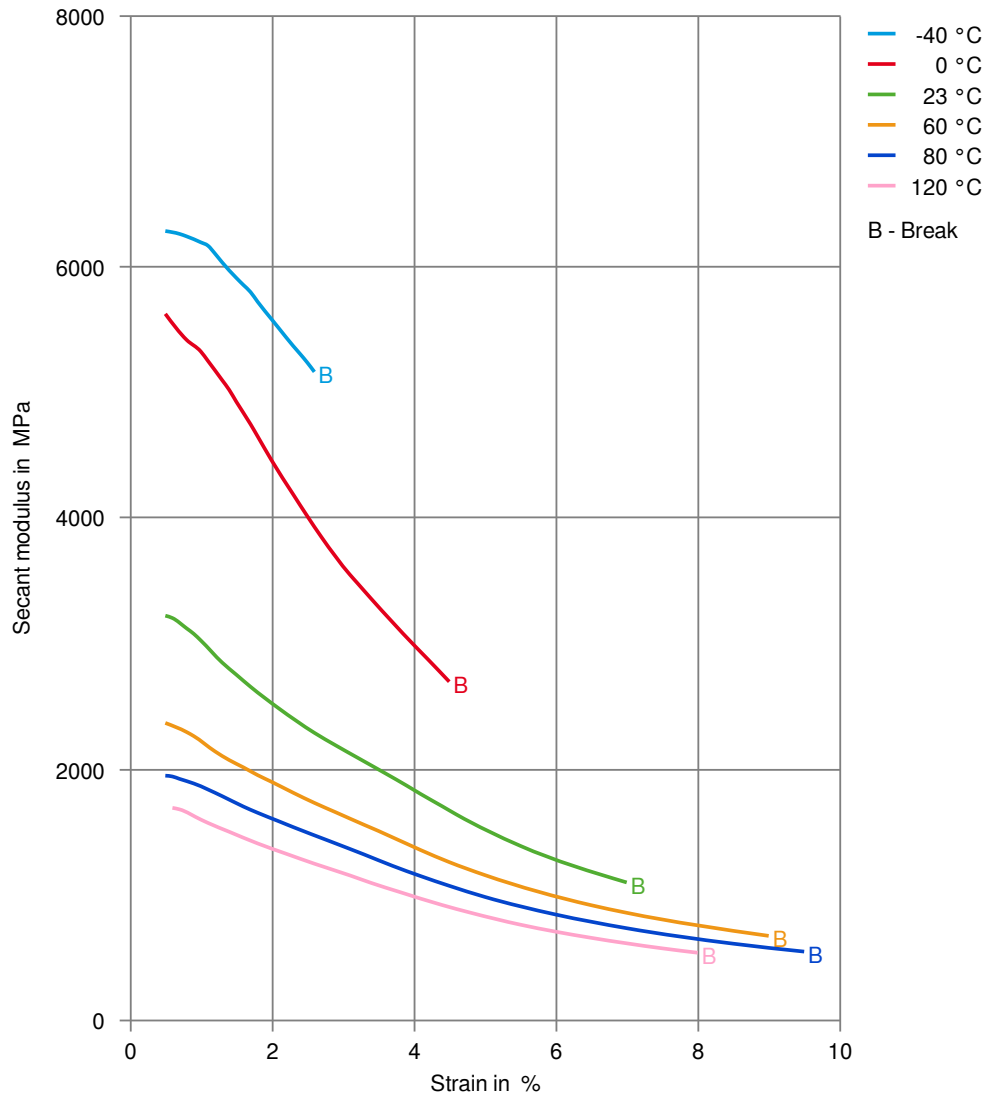

Zytel® 70G13HS1L NC010

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✗ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✓ Acetone, 23°C

Ethers

- ✓ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✓ SAE 10W40 multigrade motor oil, 130°C
- ✓ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60°C
- ✓ ISO 1817 Liquid 2 - M15E4, 60°C
- ✓ ISO 1817 Liquid 3 - M3E7, 60°C
- ✓ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C

Zytel® 70G13HS1L NC010

NYLON RESIN

- ✓ Sodium Carbonate solution (20% by mass), 23 °C
- ✓ Sodium Carbonate solution (2% by mass), 23 °C
- ✗ Zinc Chloride solution (50% by mass), 23 °C

Other

- ✓ Ethyl Acetate, 23 °C
- ✗ Hydrogen peroxide, 23 °C
- ✓ DOT No. 4 Brake fluid, 130 °C
- ✓ Ethylene Glycol (50% by mass) in water, 108 °C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23 °C
- ✓ 50% Oleic acid + 50% Olive Oil, 23 °C
- ✓ Water, 23 °C
- ✓ Water, 90 °C
- ✗ Phenol solution (5% by mass), 23 °C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).