

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN

Zytel® XT70G50HSL BK044A is a 50% glass fiber reinforced, heat stabilized polyamide 66 resin for injection molding.

### Product information

Resin Identification	PA66-GF50	ISO 1043
Part Marking Code	>PA66-GF50<	ISO 11469
ISO designation	ISO 16396-PA66,GF50,M1CGHR,S14-160	

### Rheological properties

	dry/cond.		
Melt mass-flow rate	9/*	g/10min	ISO 1133
Melt mass-flow rate, Temperature	275/*	°C	
Melt mass-flow rate, Load	5/*	kg	
Viscosity number	145 <sup>[1]</sup> /*	cm <sup>3</sup> /g	ISO 307, 1628
Moulding shrinkage, parallel	0.2/-	%	ISO 294-4, 2577
Moulding shrinkage, normal	0.8/-	%	ISO 294-4, 2577
Moulding shrinkage, parallel, annealed	0.3/*	%	ISO 294-4
Moulding shrinkage, normal, annealed	1/*	%	ISO 294-4

[1]: sulfuric acid 96% (132 cm<sup>3</sup>/g in formic acid 90%)

### Typical mechanical properties

	dry/cond.		
Tensile modulus	17000/11500	MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	240/170	MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2.6/5	%	ISO 527-1/-2
Flexural modulus	15000/-	MPa	ISO 178
Flexural strength	340/-	MPa	ISO 178
Charpy impact strength, 23°C	90/105	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	15/19	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	13/-	kJ/m <sup>2</sup>	ISO 179/1eA
Poisson's ratio	0.33/0.33		

### Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	259/*	°C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	70/20	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	245/*	°C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	19/*	E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	65/*	E-6/K	ISO 11359-1/-2
TGA curve	available		ISO 11359-1/-2

### Flammability

FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	22 mm/min	ISO 3795 (FMVSS 302)

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN

### Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	1.2/*	%	Sim. to ISO 62
Density	1590/-	kg/m <sup>3</sup>	ISO 1183

### Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	285 °C
Min. melt temperature	275 °C
Max. melt temperature	295 °C
Mold Temperature Optimum	100 °C
Min. mould temperature	70 °C
Max. mould temperature	120 °C
Ejection temperature	205 °C

### Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent
Special characteristics	Heat stabilised or stable to heat


### Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
BMW	GS93016-PA66-GF50	(Highly Heat Aging Resistant)
Valeo	PDTNVC15006 RevE	PA66-GF50 Class 5B

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


### Viscosity-shear rate

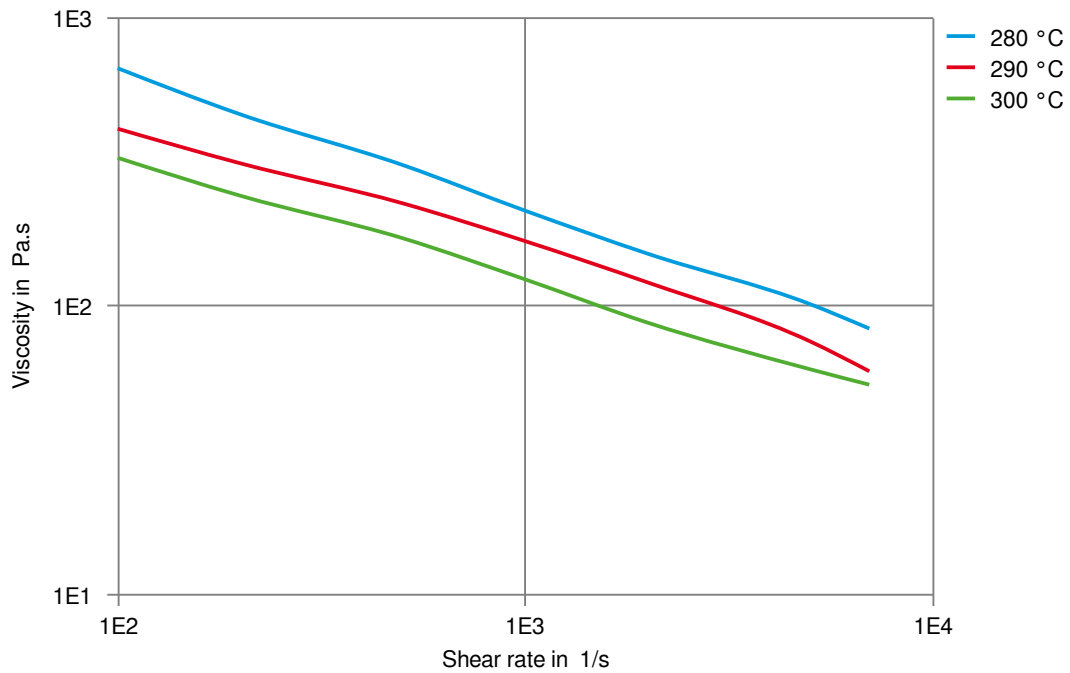

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


### Shearstress-shear rate

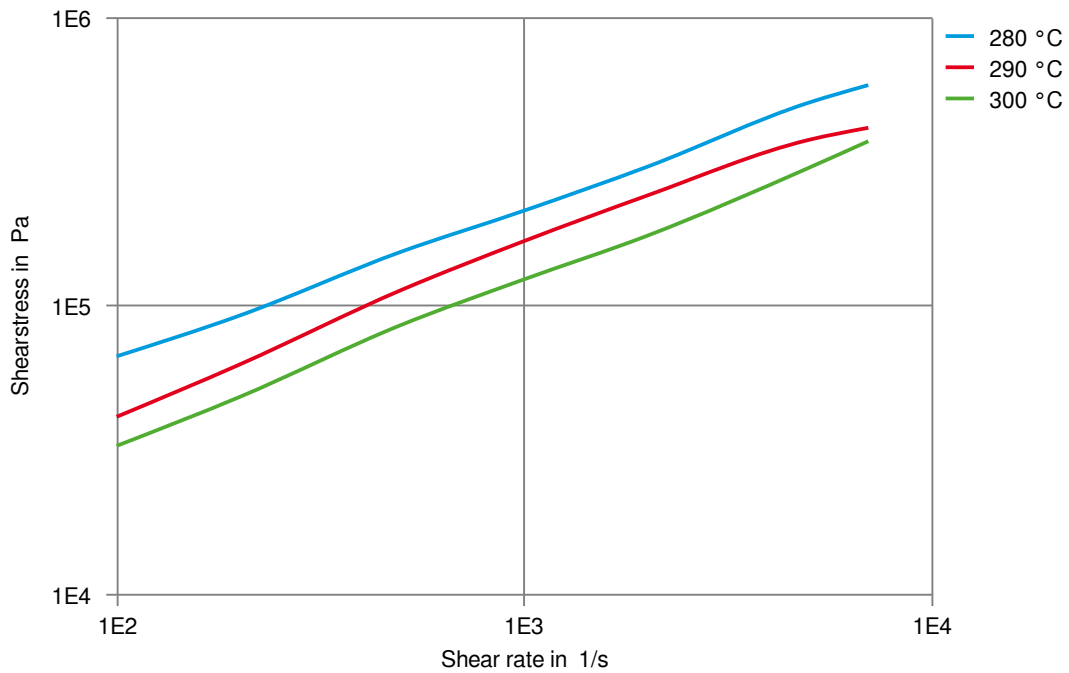

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


Dynamic Tensile modulus-temperature (dry)

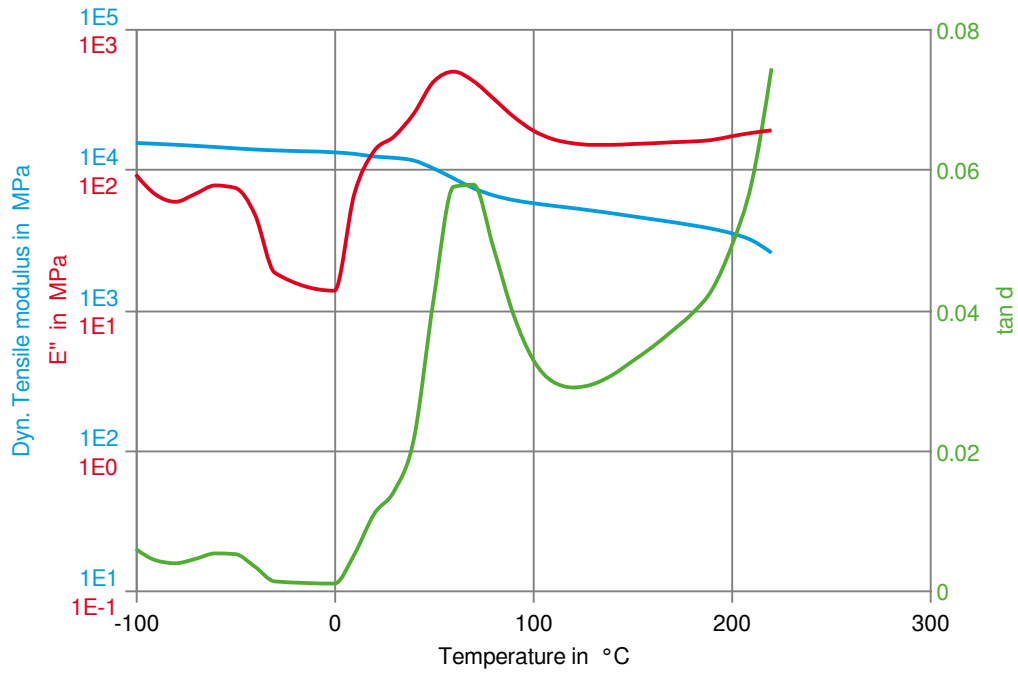

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


### Stress-strain (dry)

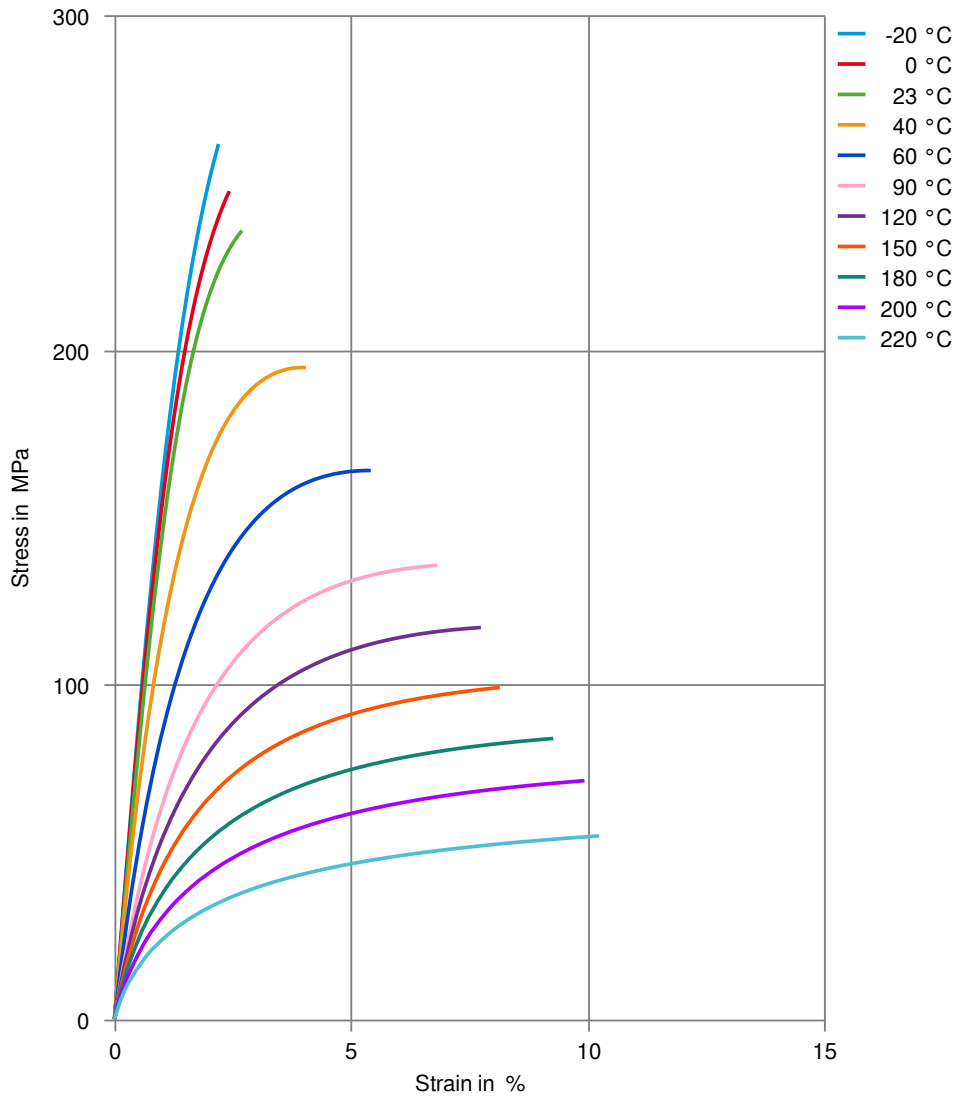

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


### Stress-strain (cond.)

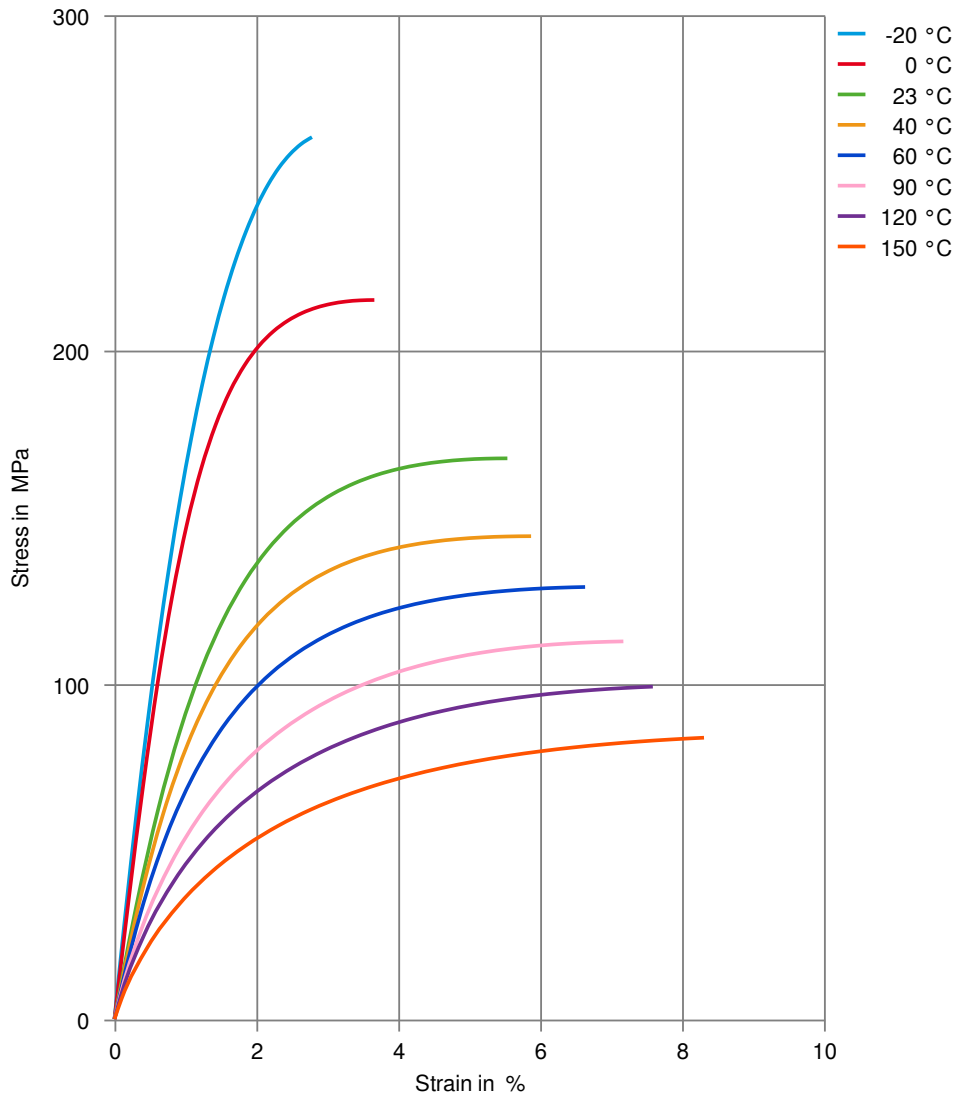

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


### Secant modulus-strain (dry)

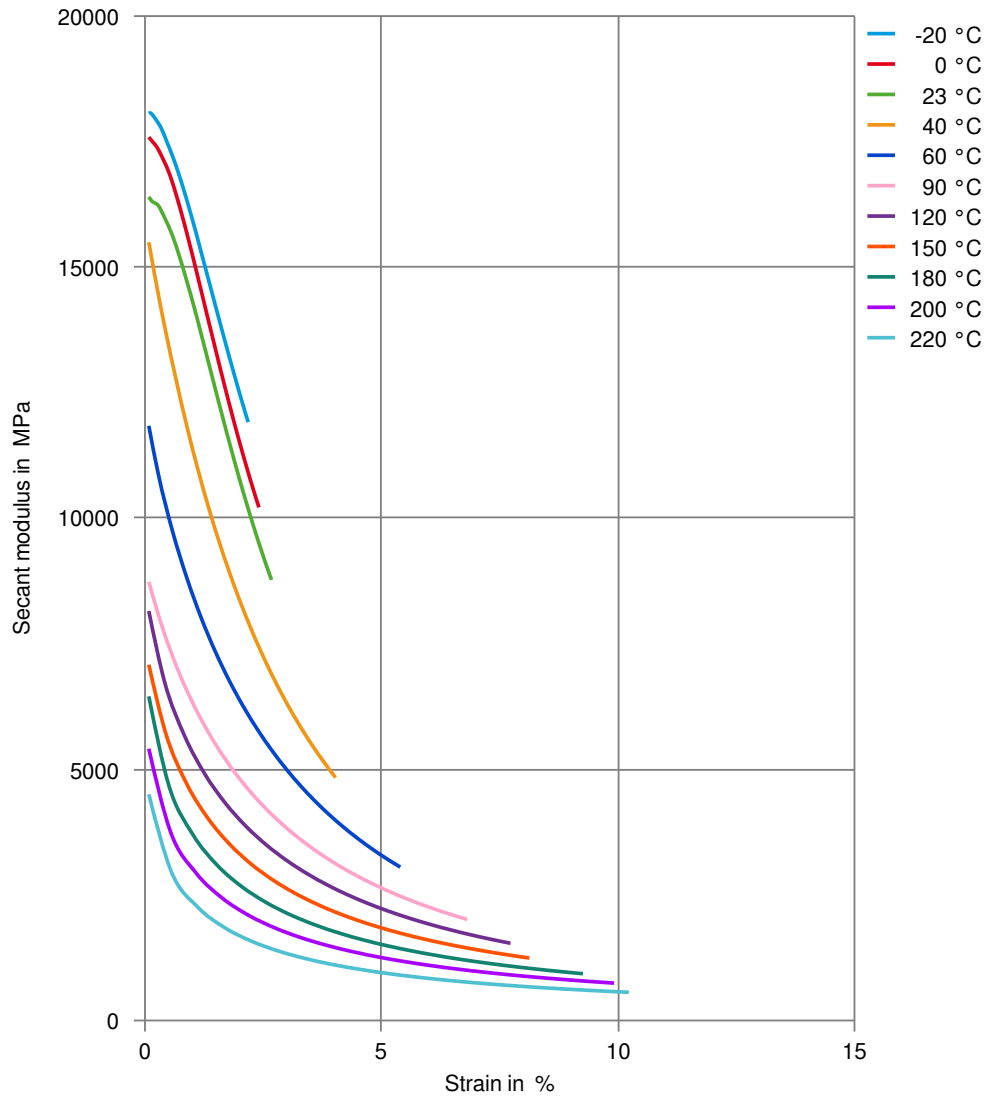

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


### Secant modulus-strain (cond.)

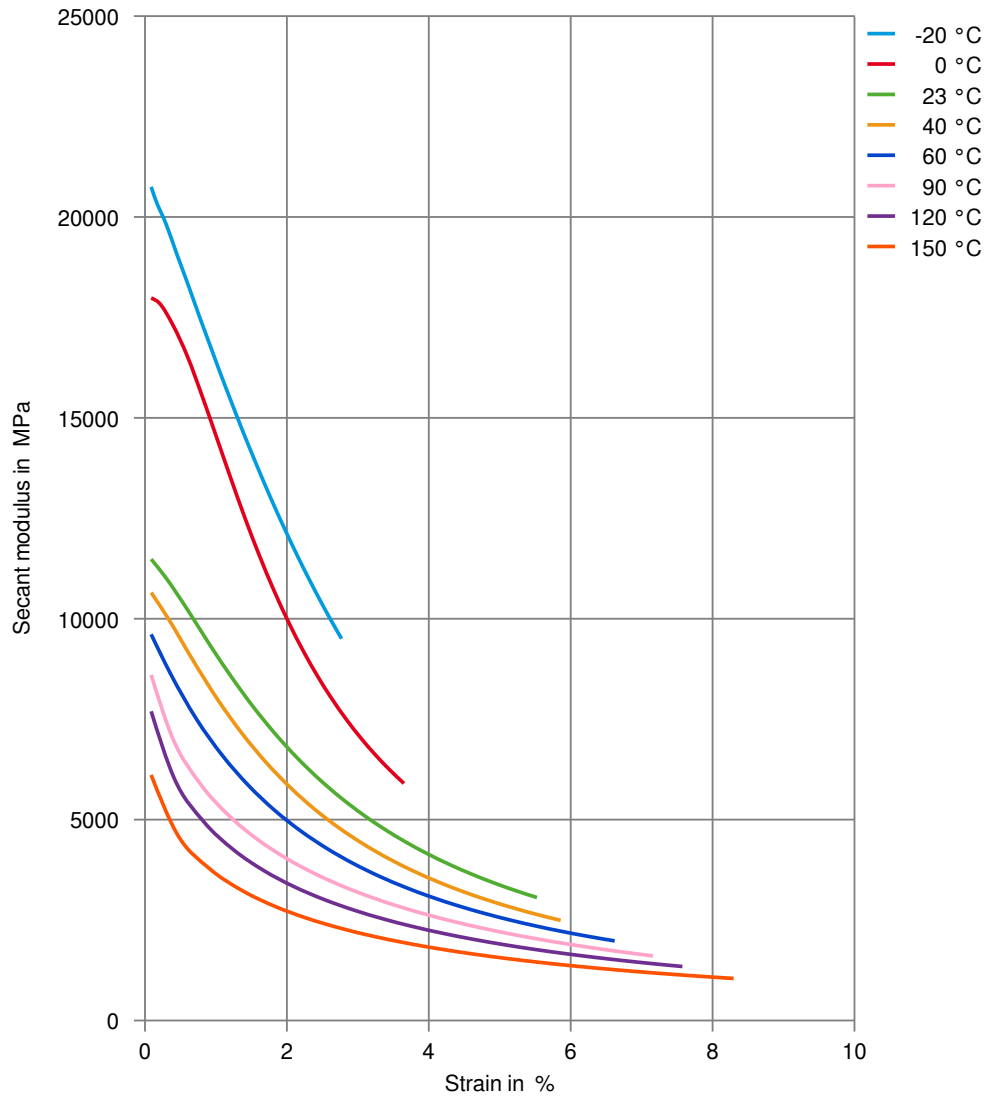

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


Stress-strain (isochronous) 110°C (dry)

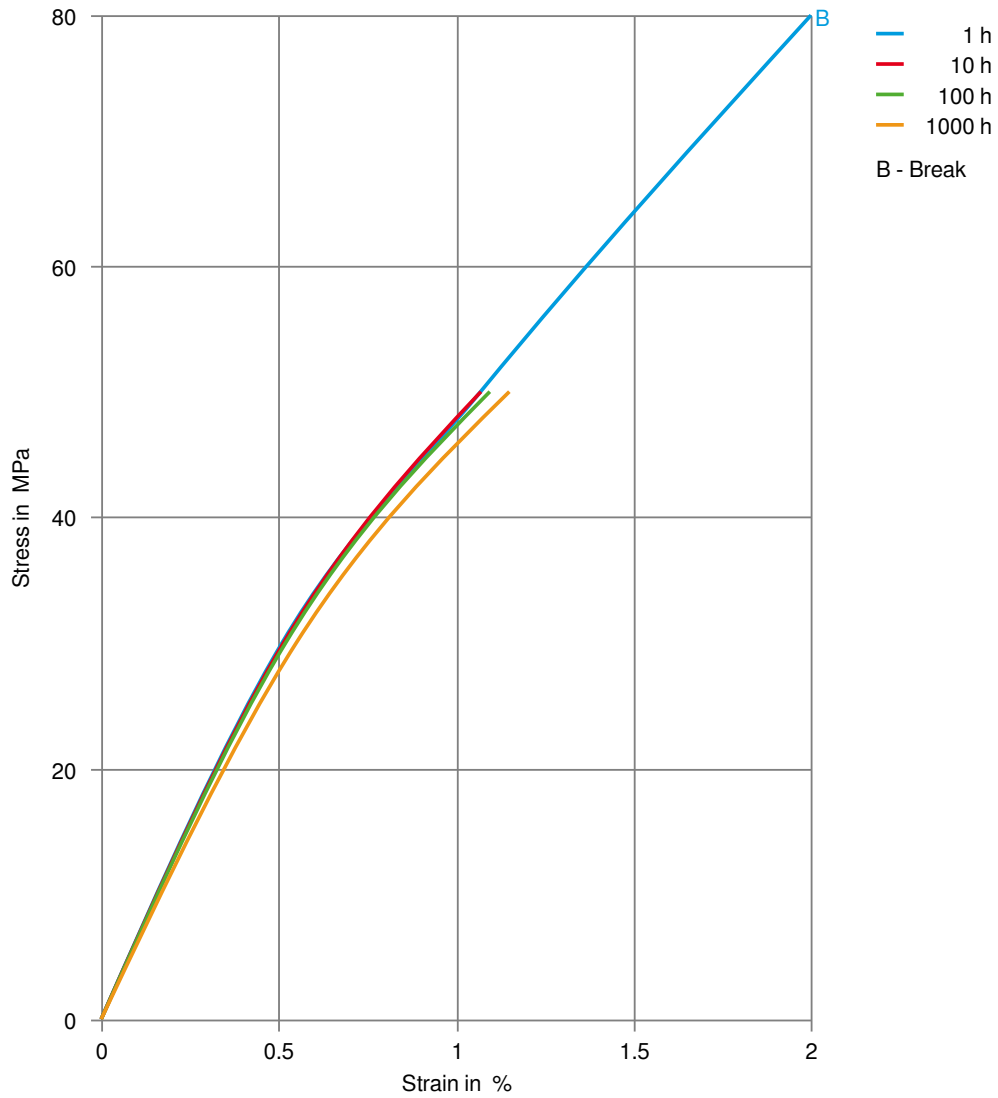

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


Creep modulus-time 110°C (dry)

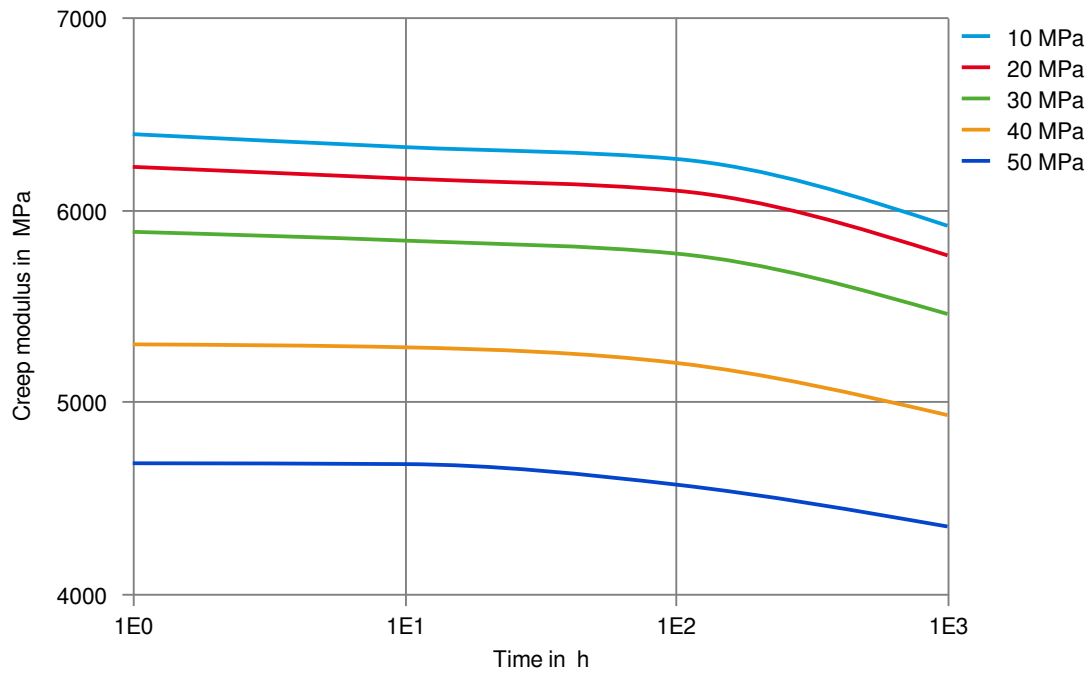

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


### Tensile modulus-temperature (dry)

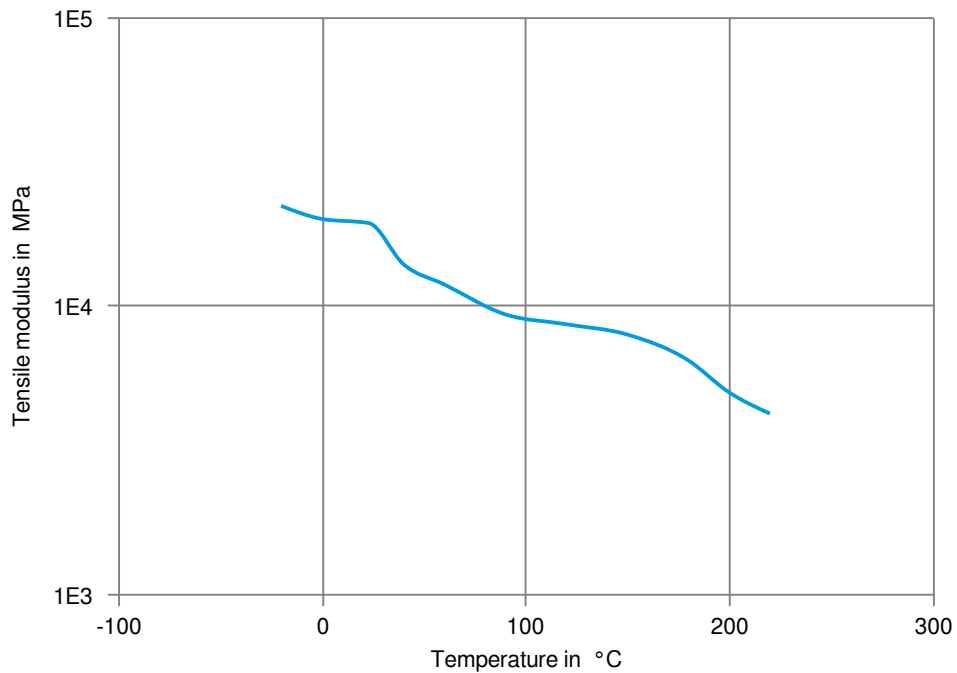

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN


### Tensile modulus-temperature (cond.)

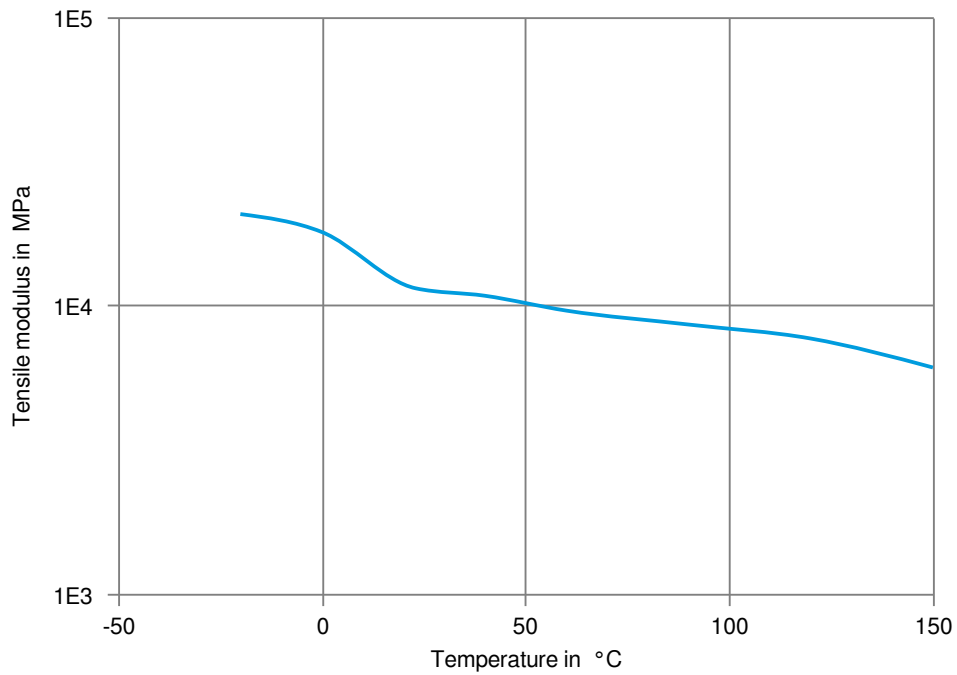

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN

Tensile Fatigue, 10Hz, R=0.1 @ 2mm (dry)

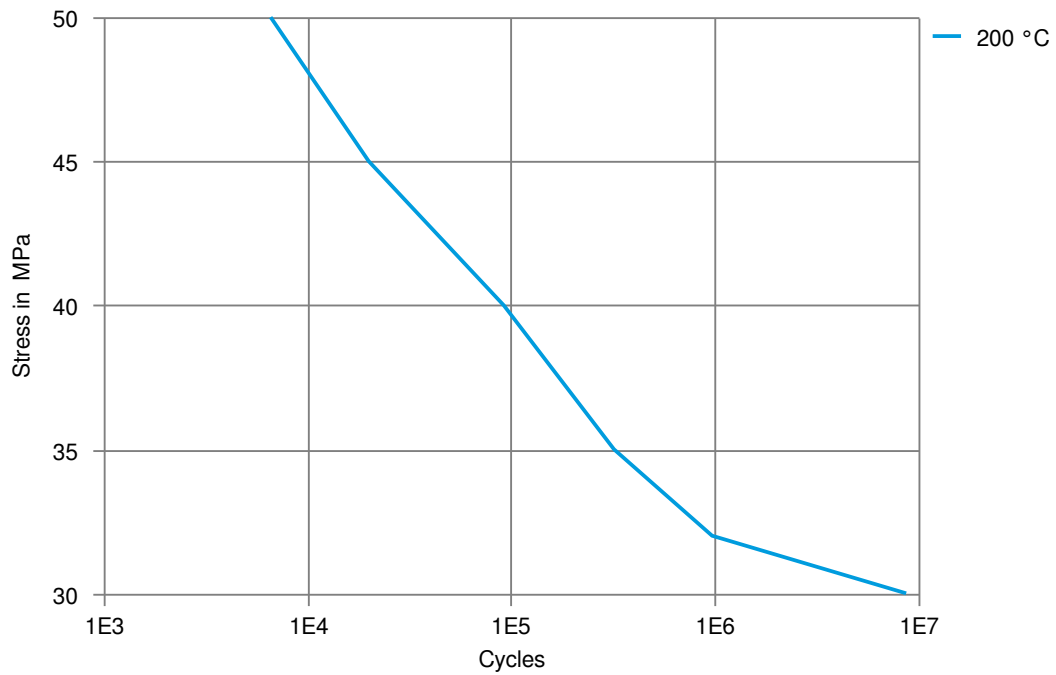

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN

### Chemical Media Resistance

#### Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✗ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

#### Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

#### Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

#### Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

#### Ketones

- ✓ Acetone, 23°C

#### Ethers

- ✓ Diethyl ether, 23°C

#### Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✓ SAE 10W40 multigrade motor oil, 130°C
- ✓ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C
- ✓ Motor oil OS206 304 Ref.Eng.Oil, ISP, 135°C
- ✓ Automatic hypoid-gear oil Shell Donax TX, 135°C
- ✓ Hydraulic oil Pentosin CHF 202, 125°C

#### Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60°C
- ✓ ISO 1817 Liquid 2 - M15E4, 60°C
- ✓ ISO 1817 Liquid 3 - M3E7, 60°C
- ✓ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), >90°C
- ✓ Diesel EN 590, 100°C

# Zytel® XT70G50HSL BK044A (PRELIMINARY)

## ZYTEL® PLUS & XT NYLON RESIN

### Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C
- ✓ Sodium Carbonate solution (20% by mass), 23°C
- ✓ Sodium Carbonate solution (2% by mass), 23°C
- ✗ Zinc Chloride solution (50% by mass), 23°C

### Other

- ✓ Ethyl Acetate, 23°C
- ✗ Hydrogen peroxide, 23°C
- ✓ DOT No. 4 Brake fluid, 130°C
- ✓ DOT No. 4 Brake fluid, 120°C
- ✓ Ethylene Glycol (50% by mass) in water, 108°C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23°C
- ✓ 50% Oleic acid + 50% Olive Oil, 23°C
- ✓ Water, 23°C
- ✓ Water, 90°C
- ✗ Phenol solution (5% by mass), 23°C

### Symbols used:

- ✓ possibly resistant  
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation  
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).