

# Rynite® 408 NC010

## THERMOPLASTIC POLYESTER RESIN

Rynite® 408 NC010 is a 30% Glass Reinforced, Toughened, Polyethylene Terephthalate with Excellent Impact Resistance

### Product information

Resin Identification	PET-IGF30	ISO 1043
Part Marking Code	>PET-IGF30<	ISO 11469

### Rheological properties

Moulding shrinkage, parallel	0.2 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.8 %	ISO 294-4, 2577
Postmoulding shrinkage, normal, 48h at 80°C	0.25 %	ISO 294-4
Postmoulding shrinkage, parallel, 48h at 80°C	0.1 %	ISO 294-4

### Typical mechanical properties

Tensile modulus	9300 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	125 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	3.3 %	ISO 527-1/-2
Flexural modulus	8300 MPa	ISO 178
Compressive strength	150 MPa	ISO 604
Charpy impact strength, 23°C	70 kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	86 kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	14 kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	12 kJ/m <sup>2</sup>	ISO 179/1eA
Hardness, Rockwell, M-scale	70	ISO 2039-2
Hardness, Rockwell, R-scale	115	ISO 2039-2
Poisson's ratio	0.34	

### Thermal properties

Melting temperature, 10°C/min	250 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	60 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	220 °C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	237 °C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	15 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	85 E-6/K	ISO 11359-1/-2
RTI, electrical, 0.75mm	140 °C	UL 746B
RTI, electrical, 1.5mm	140 °C	UL 746B
RTI, electrical, 3.0mm	140 °C	UL 746B
RTI, impact, 0.75mm	140 °C	UL 746B
RTI, impact, 1.5mm	140 °C	UL 746B
RTI, impact, 3.0mm	140 °C	UL 746B
RTI, strength, 0.75mm	140 °C	UL 746B
RTI, strength, 1.5mm	140 °C	UL 746B
RTI, strength, 3.0mm	140 °C	UL 746B

# Rynite® 408 NC010

## THERMOPLASTIC POLYESTER RESIN

### Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	0.75 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Oxygen index	22 %	ISO 4589-1/-2
Glow Wire Flammability Index, 0.4mm	700 °C	IEC 60695-2-12
Glow Wire Flammability Index, 0.75mm	700 °C	IEC 60695-2-12
Glow Wire Flammability Index, 1.0mm	700 °C	IEC 60695-2-12
Glow Wire Flammability Index, 1.5mm	700 °C	IEC 60695-2-12
Glow Wire Flammability Index, 3.0mm	800 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	700 °C	IEC 60695-2-13
Glow Wire Ignition Temperature, 0.4mm	700 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 1.0mm	700 °C	IEC 60695-2-13
Glow Wire Ignition Temperature, 1.5mm	700 °C	IEC 60695-2-13
Glow Wire Ignition Temperature, 3.0mm	800 °C	IEC 60695-2-13
Glow Wire Temperature, No Flame, 0.75mm	700 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 1mm	700 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 1.5mm	700 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 3mm	800 °C	IEC 60335-1
FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	24 mm/min	ISO 3795 (FMVSS 302)

### Electrical properties

Relative permittivity, 1MHz	3.3	IEC 62631-2-1
Dissipation factor, 1MHz	150 E-4	IEC 62631-2-1
Volume resistivity	1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	43 kV/mm	IEC 60243-1

### Physical/Other properties

Density	1490 kg/m <sup>3</sup>	ISO 1183
---------	------------------------	----------

### Injection

Drying Recommended	yes
Drying Temperature	120 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.02 <sup>[1]</sup> %
Melt Temperature Optimum	285 °C
Min. melt temperature	270 °C
Max. melt temperature	290 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	95 °C
Min. mould temperature	75 °C
Max. mould temperature	95 °C
Hold pressure range	≥80 MPa

# Rynite® 408 NC010

## THERMOPLASTIC POLYESTER RESIN

Hold pressure time	4 s/mm
Back pressure	As low as possible MPa
Ejection temperature	170 °C

[1]: At levels above 0.02%, strength and toughness will decrease, even though parts may not exhibit surface defects.

### Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent


### Automotive

OEM	STANDARD
BMW	GS93016-PET-GF30

# Rynite® 408 NC010

THERMOPLASTIC POLYESTER RESIN


Viscosity-shear rate

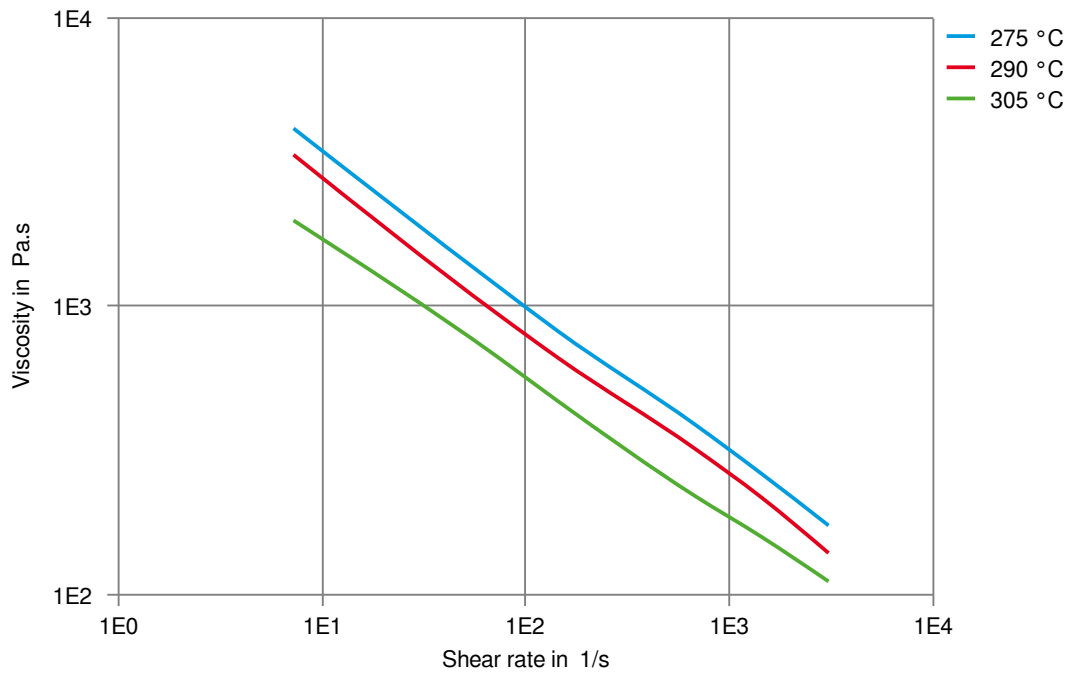

# Rynite® 408 NC010

THERMOPLASTIC POLYESTER RESIN


Shearstress-shear rate

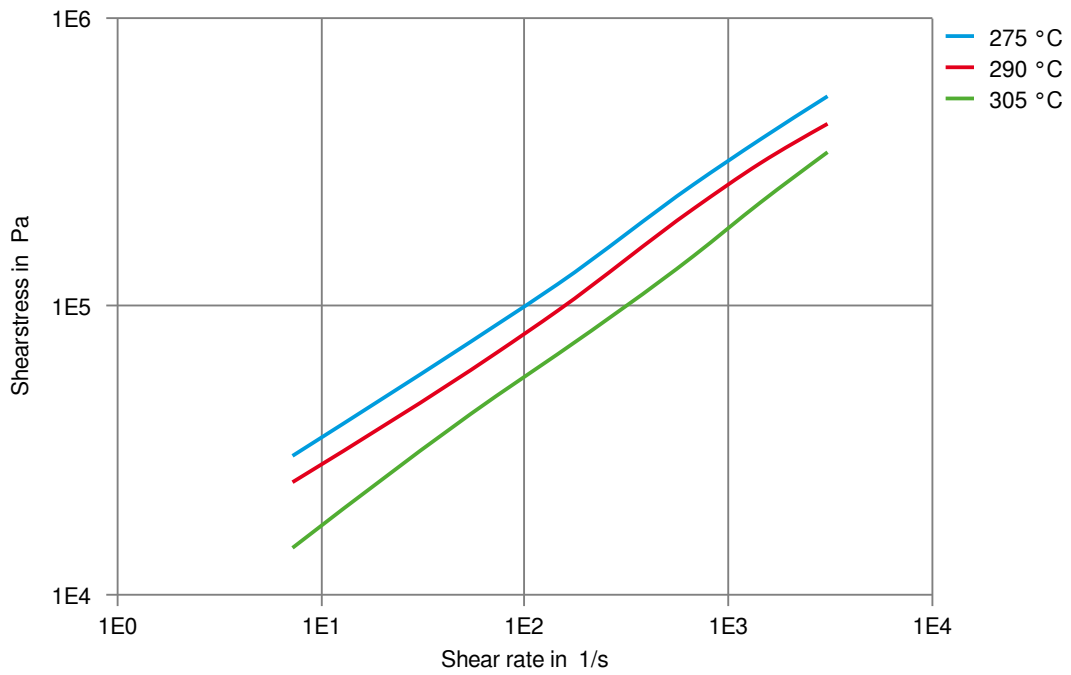

# Rynite® 408 NC010

THERMOPLASTIC POLYESTER RESIN


Dynamic Tensile modulus-temperature

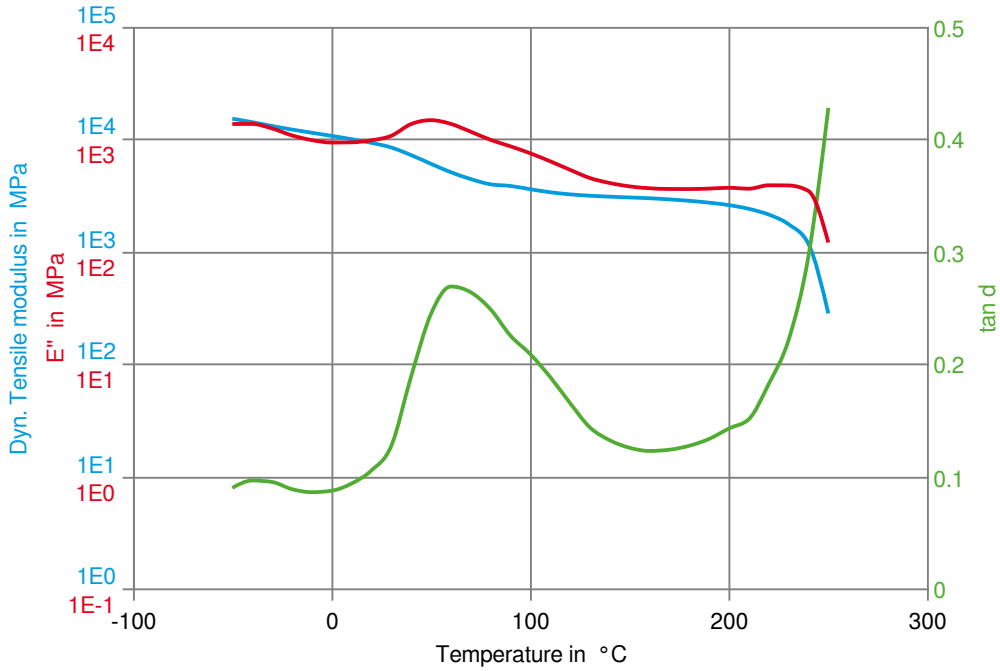

# Rynite® 408 NC010

THERMOPLASTIC POLYESTER RESIN


## Stress-strain

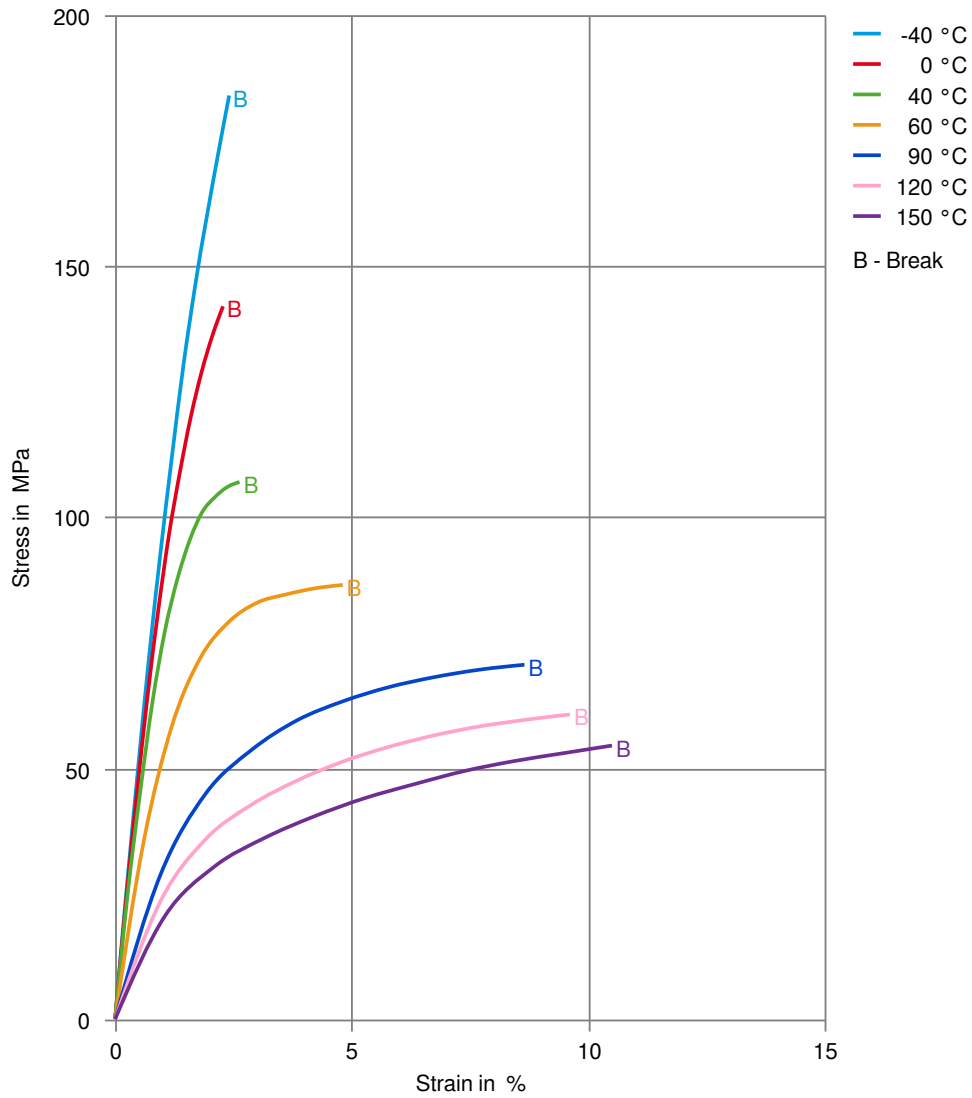

# Rynite® 408 NC010

THERMOPLASTIC POLYESTER RESIN

## Secant modulus-strain

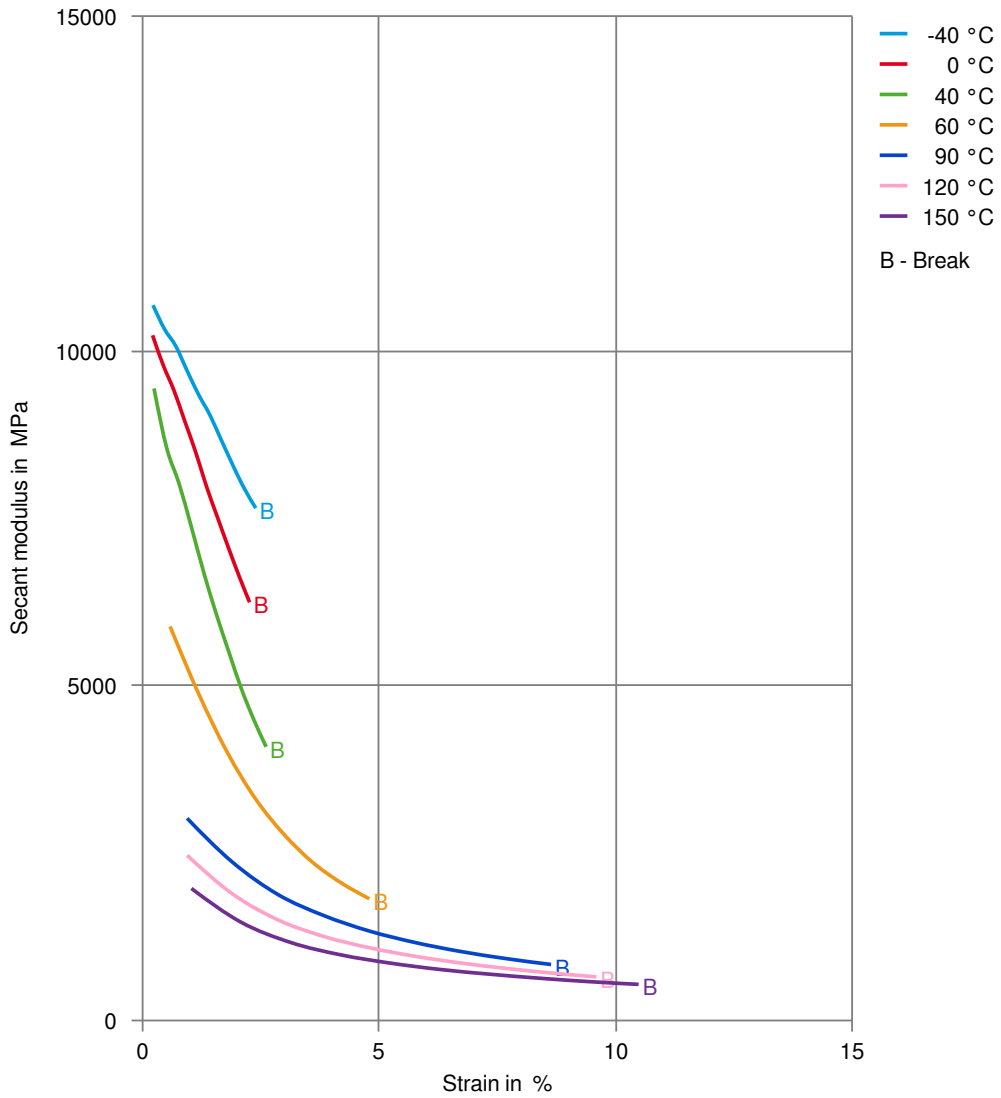

# Rynite® 408 NC010

## THERMOPLASTIC POLYESTER RESIN

### Chemical Media Resistance

#### Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✗ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

#### Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

#### Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

#### Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

#### Ketones

- ✓ Acetone, 23°C

#### Ethers

- ✓ Diethyl ether, 23°C

#### Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✗ SAE 10W40 multigrade motor oil, 130°C
- ✗ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

#### Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60°C
- ✓ ISO 1817 Liquid 2 - M15E4, 60°C
- ✓ ISO 1817 Liquid 3 - M3E7, 60°C
- ✓ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

#### Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C

# Rynite® 408 NC010

## THERMOPLASTIC POLYESTER RESIN

- ✓ Sodium Carbonate solution (20% by mass), 23 °C
- ✓ Sodium Carbonate solution (2% by mass), 23 °C
- ✓ Zinc Chloride solution (50% by mass), 23 °C

### Other

- ✓ Ethyl Acetate, 23 °C
- ✗ Hydrogen peroxide, 23 °C
- ✗ DOT No. 4 Brake fluid, 130 °C
- ✗ Ethylene Glycol (50% by mass) in water, 108 °C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23 °C
- ✓ 50% Oleic acid + 50% Olive Oil, 23 °C
- ✓ Water, 23 °C
- ✗ Water, 90 °C
- ✓ Phenol solution (5% by mass), 23 °C

### Symbols used:

- ✓ possibly resistant  
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation  
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).