

Rynite® 545 NC010

THERMOPLASTIC POLYESTER RESIN

Common features of Rynite® thermoplastic polyester include mechanical and physical properties such as excellent balance of strength and stiffness, dimensional stability, creep resistance, heat resistance, high surface gloss and good inherent electrical properties at elevated temperature. It can be processed over a broad temperature range and has excellent flow properties.

Rynite® thermoplastic polyester resins are typically used in demanding applications in the automotive, electrical and electronics, appliances where they successfully replace metals and thermosets, as well as other thermoplastic polymers.

Rynite® 545 NC010 is a 45% glass reinforced modified polyethylene terephthalate resin.

Product information

Resin Identification	PET-GF45	ISO 1043
Part Marking Code	>PET-GF45<	ISO 11469

Rheological properties

Viscosity number	55 cm ³ /g	ISO 307, 1628
Moulding shrinkage, parallel	0.2 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.8 %	ISO 294-4, 2577
Postmoulding shrinkage, normal, 48h at 80 °C	0.35 %	ISO 294-4
Postmoulding shrinkage, parallel, 48h at 80 °C	0.05 %	ISO 294-4

Typical mechanical properties

Tensile modulus	15500 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	182 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2 %	ISO 527-1/-2
Flexural modulus	13500 MPa	ISO 178
Compressive strength	230 MPa	ISO 604
Tensile creep modulus, 1h	15600 MPa	ISO 899-1
Tensile creep modulus, 1000h	13300 MPa	ISO 899-1
Charpy impact strength, 23 °C	60 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30 °C	40 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23 °C	11 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30 °C	11 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23 °C	11 kJ/m ²	ISO 180/1A
Hardness, Rockwell, M-scale	100	ISO 2039-2
Hardness, Rockwell, R-scale	120	ISO 2039-2
Poisson's ratio	0.33	

Thermal properties

Melting temperature, 10 °C/min	252 °C	ISO 11357-1/-3
Glass transition temperature, 10 °C/min	90 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	226 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	180 °C	ISO 75-1/-2
Vicat softening temperature, 50 °C/h 50N	230 °C	ISO 306
Coefficient of linear thermal expansion (CLTE), parallel	15 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	83 E-6/K	ISO 11359-1/-2

Rynite® 545 NC010

THERMOPLASTIC POLYESTER RESIN

Thermal conductivity, flow	0.32 W/(m K)	ISO 22007-2
Effective thermal diffusivity, flow	1.4E-7 m ² /s	ISO 22007-4
RTI, electrical, 0.75mm	140 °C	UL 746B
RTI, electrical, 1.5mm	140 °C	UL 746B
RTI, electrical, 3.0mm	140 °C	UL 746B
RTI, impact, 0.75mm	140 °C	UL 746B
RTI, impact, 1.5mm	140 °C	UL 746B
RTI, impact, 3.0mm	140 °C	UL 746B
RTI, strength, 0.75mm	140 °C	UL 746B
RTI, strength, 1.5mm	140 °C	UL 746B
RTI, strength, 3.0mm	140 °C	UL 746B

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	0.75 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Oxygen index	20 %	ISO 4589-1/-2
Glow Wire Flammability Index, 2.0mm	750 °C	IEC 60695-2-12
Glow Wire Flammability Index, 3.0mm	850 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 3.0mm	825 °C	IEC 60695-2-13
Glow Wire Temperature, No Flame, 1mm	775 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 1.5mm	775 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 2mm	775 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 3mm	850 °C	IEC 60335-1
FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80 mm/min	ISO 3795 (FMVSS 302)

Electrical properties

Relative permittivity, 100Hz	4.5	IEC 62631-2-1
Relative permittivity, 1MHz	4.4	IEC 62631-2-1
Dissipation factor, 100Hz	70 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	110 E-4	IEC 62631-2-1
Volume resistivity	1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	32 kV/mm	IEC 60243-1
Comparative tracking index	250	IEC 60112
Comparative tracking index, 23°C	2 PLC	UL 746A

Physical/Other properties

Humidity absorption, 2mm	0.14 %	Sim. to ISO 62
Water absorption, 2mm	0.62 %	Sim. to ISO 62
Density	1690 kg/m ³	ISO 1183

Rynite® 545 NC010

THERMOPLASTIC POLYESTER RESIN

VDA Properties

Fogging, G-value (condensate) 0 mg ISO 6452

Injection

Drying Recommended	yes
Drying Temperature	120 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.02 ^[1] %
Melt Temperature Optimum	285 °C
Min. melt temperature	280 °C
Max. melt temperature	300 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	110 °C
Min. mould temperature	95 °C
Max. mould temperature	125 ^[2] °C
Hold pressure range	≥80 MPa
Hold pressure time	4 s/mm
Back pressure	As low as possible MPa
Ejection temperature	175 °C

[1]: At levels above 0.02%, strength and toughness will decrease, even though parts may not exhibit surface defects.

[2]: (6mm - 1mm thickness)

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent


Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
BMW	GS93016-PET-GF45	
General Motors	Natural; Part Specific Approval, Please Contact Your CE Representative For More Details.	
Stellantis - Chrysler	MS.50103 / CPN-2635	Natural
Stellantis - Chrysler	MS.50103 / CPN-2660	Natural

Rynite® 545 NC010

THERMOPLASTIC POLYESTER RESIN


Viscosity-shear rate

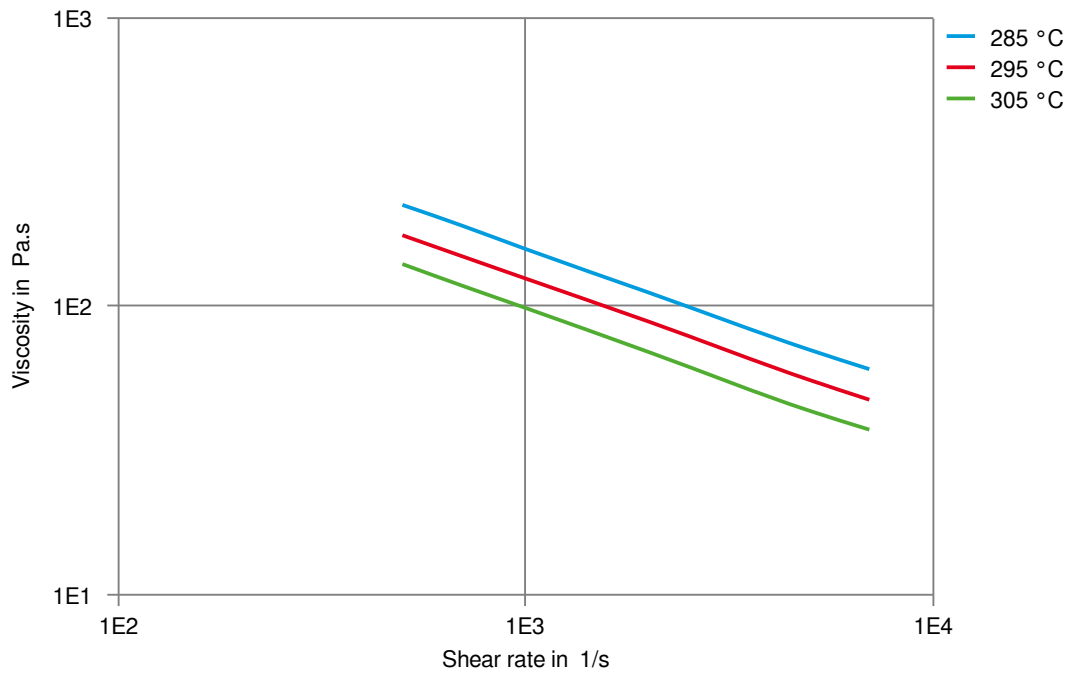

Rynite® 545 NC010

THERMOPLASTIC POLYESTER RESIN


Shearstress-shear rate

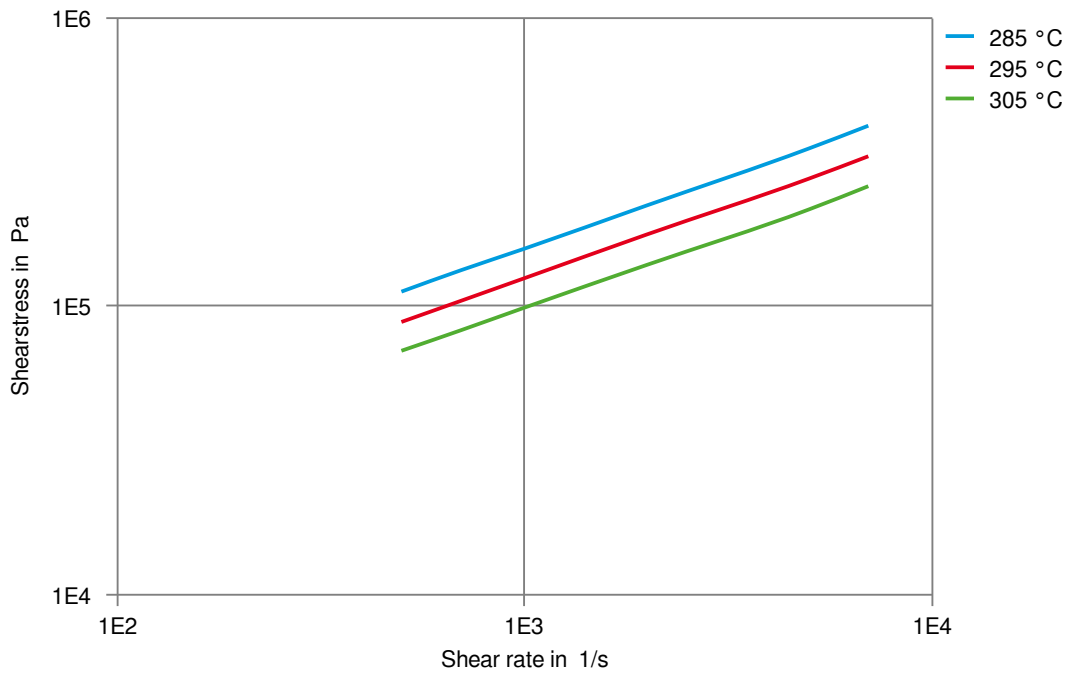

Rynite® 545 NC010

THERMOPLASTIC POLYESTER RESIN

Stress-strain

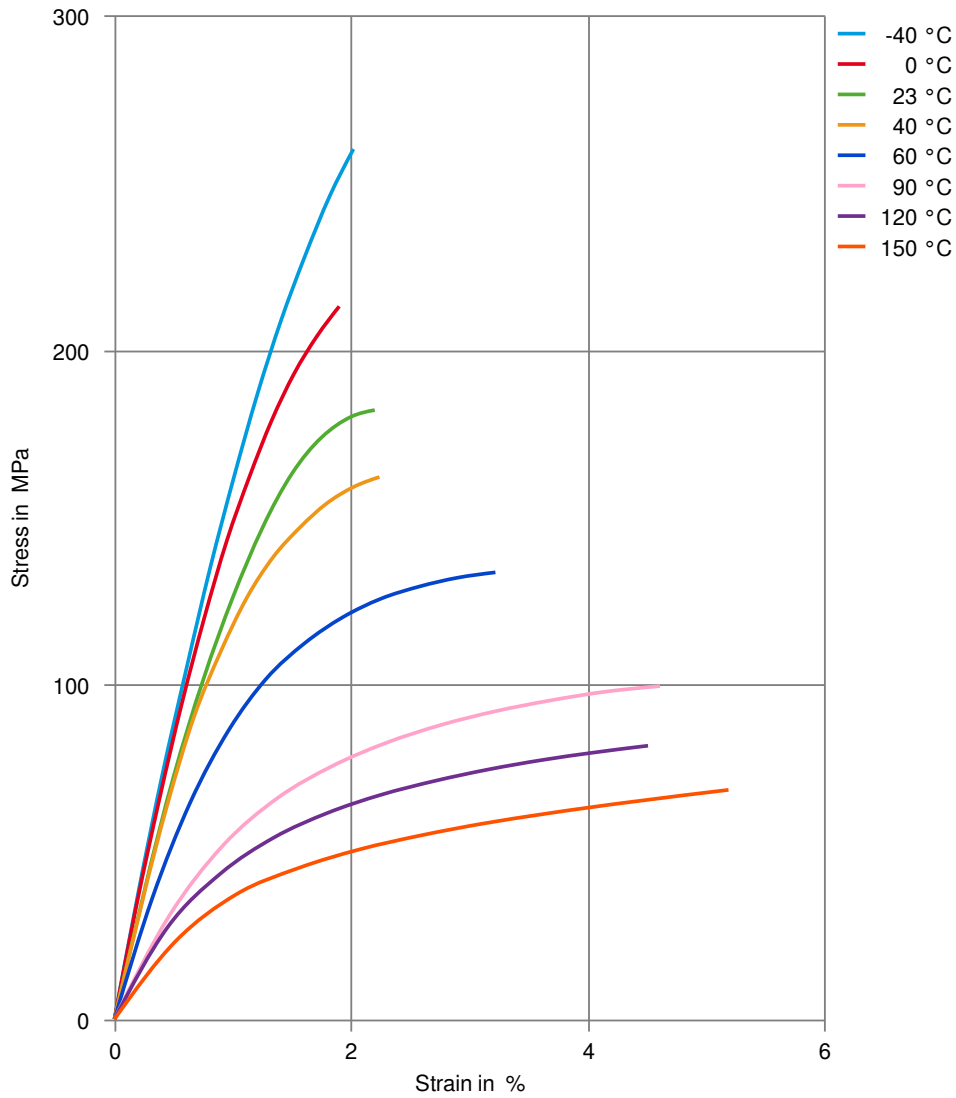

Rynite® 545 NC010

THERMOPLASTIC POLYESTER RESIN

Secant modulus-strain

