

Rynite® FR515 NC010

THERMOPLASTIC POLYESTER RESIN

Common features of Rynite® thermoplastic polyester include mechanical and physical properties such as excellent balance of strength and stiffness, dimensional stability, creep resistance, heat resistance, high surface gloss and good inherent electrical properties at elevated temperature. It can be processed over a broad temperature range and has excellent flow properties.

Rynite® thermoplastic polyester resins are typically used in demanding applications in the automotive, electrical and electronics, appliances where they successfully replace metals and thermosets, as well as other thermoplastic polymers.

Rynite® FR515 NC010 is a 15% glass reinforced, flame retardant modified polyethylene terephthalate resin.

Product information

Resin Identification	PET- GF15FR(17)	ISO 1043
Part Marking Code	>PET-GF15FR(17)<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0.3 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.8 %	ISO 294-4, 2577
Moulding shrinkage, parallel, annealed	0.5 %	ISO 294-4
Moulding shrinkage, normal, annealed	1.15 %	ISO 294-4
Postmoulding shrinkage, normal, 48h at 80°C	0.25 %	ISO 294-4
Postmoulding shrinkage, parallel, 48h at 80°C	0.1 %	ISO 294-4

Typical mechanical properties

Tensile modulus	6800 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	107 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2.6 %	ISO 527-1/-2
Flexural modulus	5940 MPa	ISO 178
Flexural strength	170 MPa	ISO 178
Compressive strength	170 MPa	ISO 604
Charpy impact strength, 23°C	40 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	35 kJ/m ²	ISO 179/1eU
Charpy impact strength, -40°C	20 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	8 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	7 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	7 kJ/m ²	ISO 179/1eA
Hardness, Rockwell, M-scale	88	ISO 2039-2
Hardness, Rockwell, R-scale	120	ISO 2039-2
Poisson's ratio	0.35	

Thermal properties

Melting temperature, 10°C/min	254 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	90 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	200 °C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	240 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	210 °C	ISO 306
Coeff. of linear therm. expansion, parallel, -40-23°C	33 E-6/K	ISO 11359-1/-2

Rynite® FR515 NC010

THERMOPLASTIC POLYESTER RESIN

Coefficient of linear thermal expansion (CLTE), parallel	18 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, parallel, 55-160°C	12 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, -40-23°C	70 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	88 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal, 55-160°C	105 E-6/K	ISO 11359-1/-2
Thermal conductivity, flow	0.25 W/(m K)	ISO 22007-2
RTI, electrical, 0.75mm	140 °C	UL 746B
RTI, electrical, 1.5mm	140 °C	UL 746B
RTI, electrical, 3.0mm	140 °C	UL 746B
RTI, impact, 0.75mm	140 °C	UL 746B
RTI, impact, 1.5mm	140 °C	UL 746B
RTI, impact, 3.0mm	140 °C	UL 746B
RTI, strength, 0.75mm	140 °C	UL 746B
RTI, strength, 1.5mm	140 °C	UL 746B
RTI, strength, 3.0mm	140 °C	UL 746B

Flammability

Burning Behav. at thickness h	V-0 class	IEC 60695-11-10
Thickness tested	0.86 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Burning Behav. 5V at thickness h	5VA class	IEC 60695-11-20
Thickness tested	1.5 mm	IEC 60695-11-20
UL recognition	yes	UL 94
Oxygen index	32 %	ISO 4589-1/-2
Glow Wire Flammability Index, 3.0mm	960 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 3.0mm	875 °C	IEC 60695-2-13
Glow Wire Temperature, No Flame, 1mm	750 °C	IEC 60335-1
Glow Wire Temperature, No Flame, 2mm	650 °C	IEC 60335-1
FMVSS Class	DNI	ISO 3795 (FMVSS 302)

Electrical properties

Relative permittivity, 100Hz	3.8	IEC 62631-2-1
Relative permittivity, 1MHz	3.5	IEC 62631-2-1
Dissipation factor, 100Hz	90 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	150 E-4	IEC 62631-2-1
Volume resistivity	>1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	1E13 Ohm	IEC 62631-3-2
Electric strength	34 kV/mm	IEC 60243-1
Comparative tracking index	225	IEC 60112
Comparative tracking index, 23°C	3 PLC	UL 746A
Electric Strength, Short Time, 23°C, 2mm	26 kV/mm	IEC 60243-1

Rynite® FR515 NC010

THERMOPLASTIC POLYESTER RESIN

Physical/Other properties

Density	1530 kg/m ³	ISO 1183
---------	------------------------	----------

Injection

Drying Recommended	yes
Drying Temperature	120 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.02 ^[1] %
Melt Temperature Optimum	280 °C
Min. melt temperature	270 °C
Max. melt temperature	290 °C
Screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	110 °C
Min. mould temperature	100 °C
Max. mould temperature	120 ^[2] °C
Hold pressure range	≥80 MPa
Hold pressure time	4 s/mm
Back pressure	As low as possible MPa
Ejection temperature	170 °C

[1]: At levels above 0.02%, strength and toughness will decrease, even though parts may not exhibit surface defects.

[2]: (6mm - 1mm thickness)


Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent, Flame retardant
Special characteristics	Flame retardant

Rynite® FR515 NC010

THERMOPLASTIC POLYESTER RESIN


Viscosity-shear rate

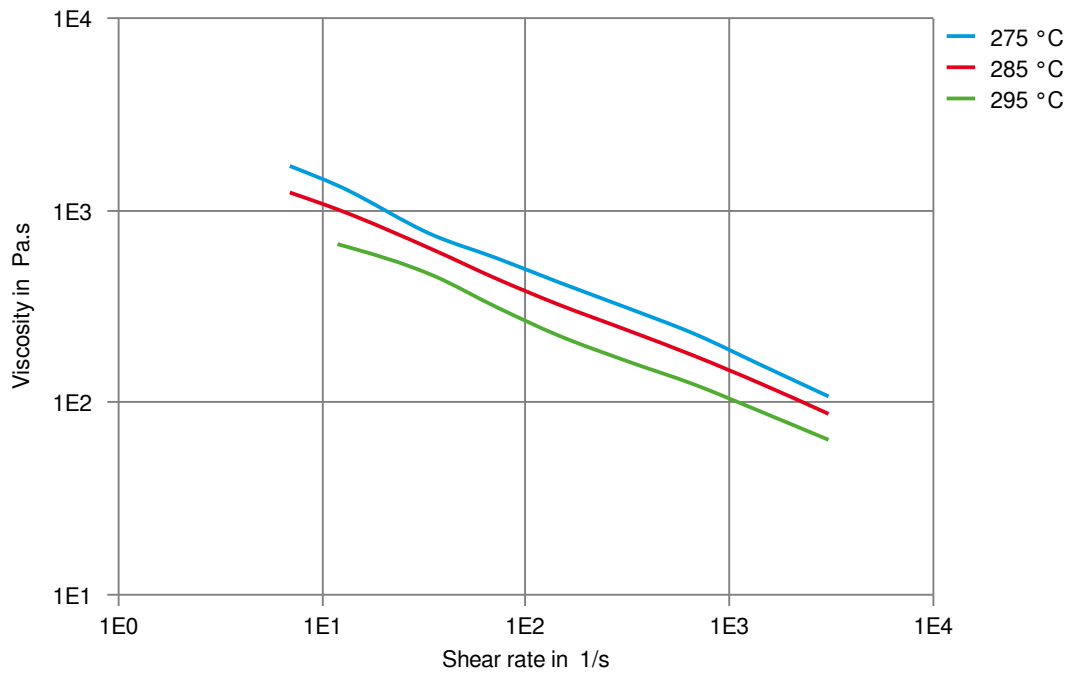

Rynite® FR515 NC010

THERMOPLASTIC POLYESTER RESIN


Shearstress-shear rate

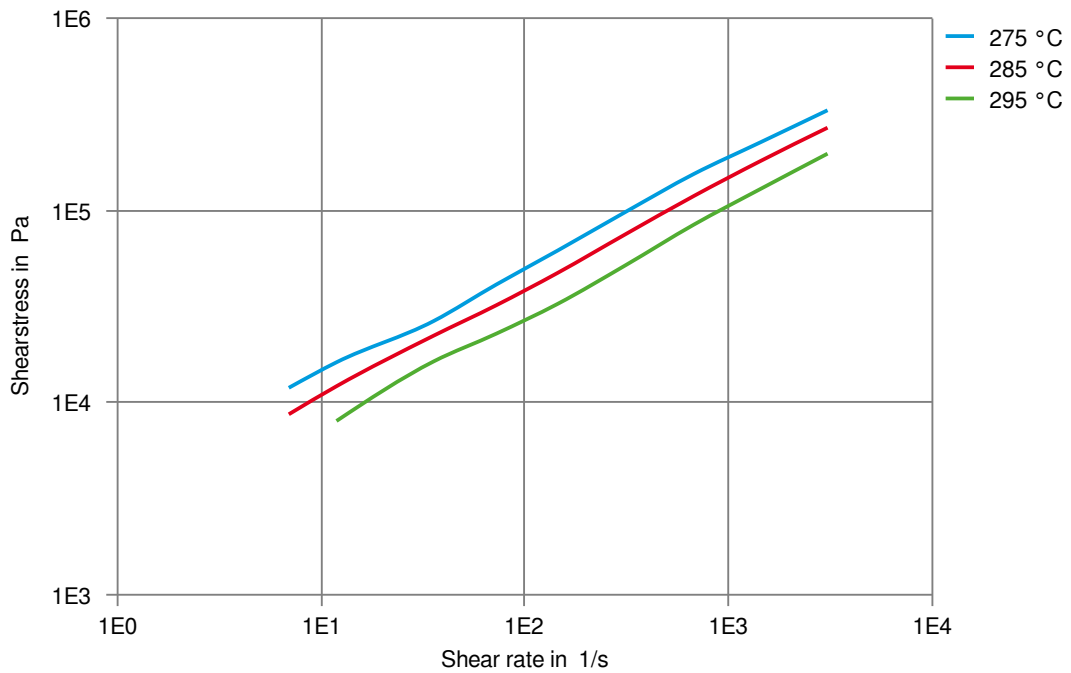

Rynite® FR515 NC010

THERMOPLASTIC POLYESTER RESIN

Stress-strain

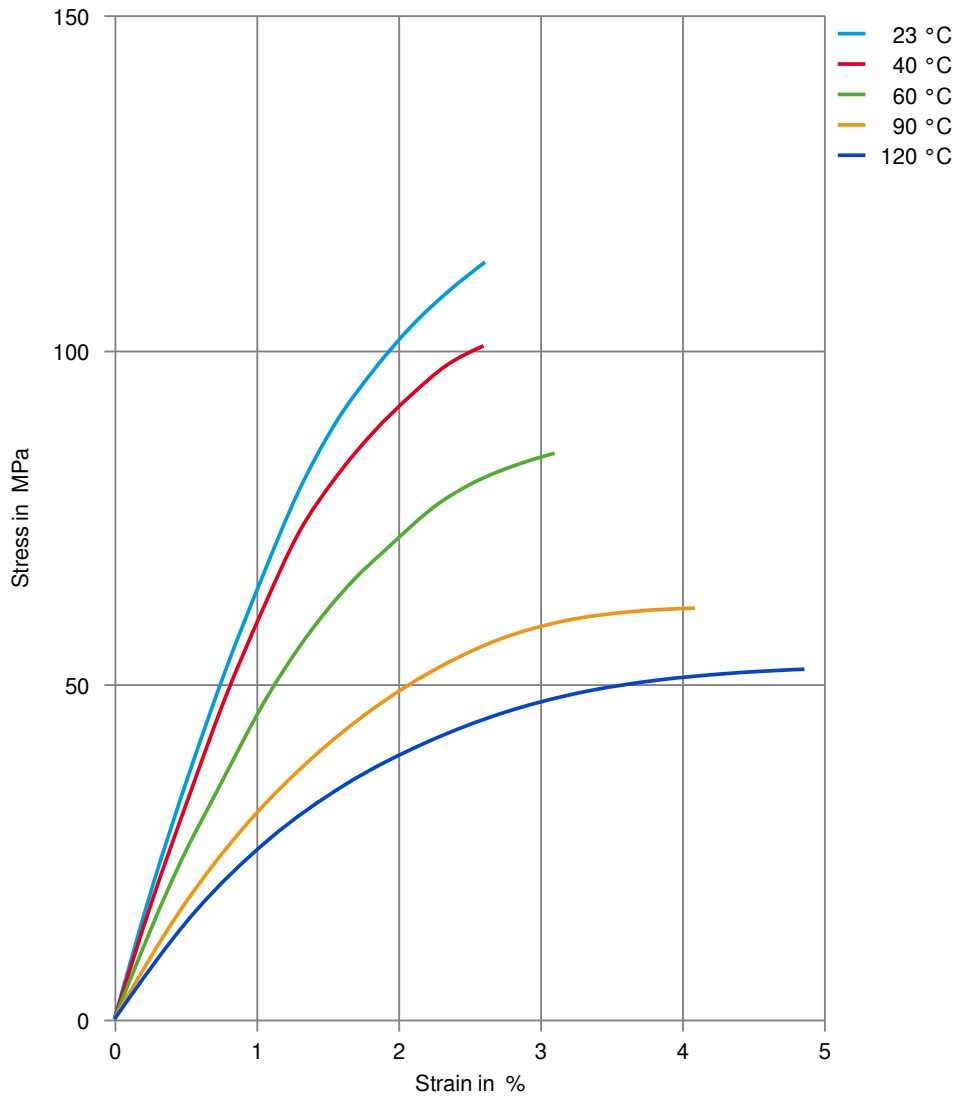

Rynite® FR515 NC010

THERMOPLASTIC POLYESTER RESIN

Secant modulus-strain

