

**Grilamid L 25 W 40 X**

PA12-I

EMS-GRIVORY | a unit of EMS-CHEMIE AG

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	<b>380 / 360</b>	MPa	ISO 527-1/-2
Charpy impact strength (+23°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength (-30°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength (+23°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength (-30°C)	<b>6 / 13</b>	kJ/m <sup>2</sup>	ISO 179/1eA

Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	<b>173 / -</b>	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	<b>45 / -</b>	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	<b>95 / -</b>	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	<b>140 / -</b>	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	<b>180 / -</b>	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	<b>HB / -</b>	class	IEC 60695-11-10
Thickness tested	<b>0.8 / -</b>	mm	IEC 60695-11-10


Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	<b>- / 1E11</b>	Ohm*m	IEC 60093
Surface resistivity	<b>- / 1E12</b>	Ohm	IEC 60093
Electric strength	<b>- / 32</b>	kV/mm	IEC 60243-1
Comparative tracking index	<b>- / 600</b>	-	IEC 60112

Other properties	dry / cond	Unit	Test Standard
Water absorption	<b>1.4 / -</b>	%	Sim. to ISO 62
Humidity absorption	<b>0.7 / -</b>	%	Sim. to ISO 62
Density	<b>1020 / -</b>	kg/m <sup>3</sup>	ISO 1183


Rheo/Phys properties	dry / cond	Unit	Test Standard
Molding shrinkage (parallel)	<b>0.9 / -</b>	%	ISO 294-4, 2577
Molding shrinkage (normal)	<b>1.2 / -</b>	%	ISO 294-4, 2577

**Diagrams**

**Viscosity-shear rate**

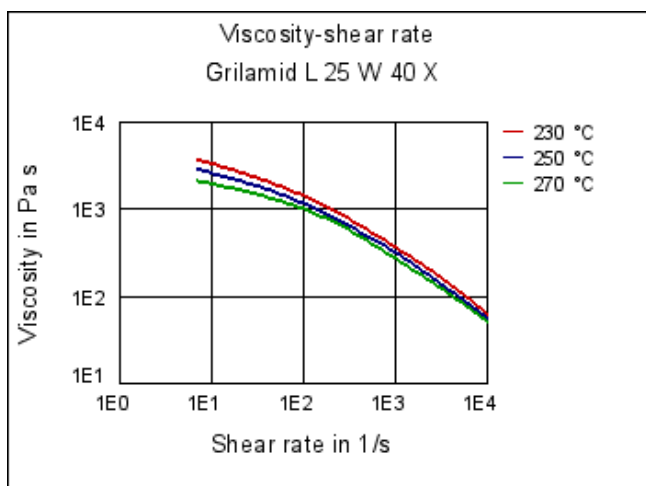

**Shearstress-shear rate**

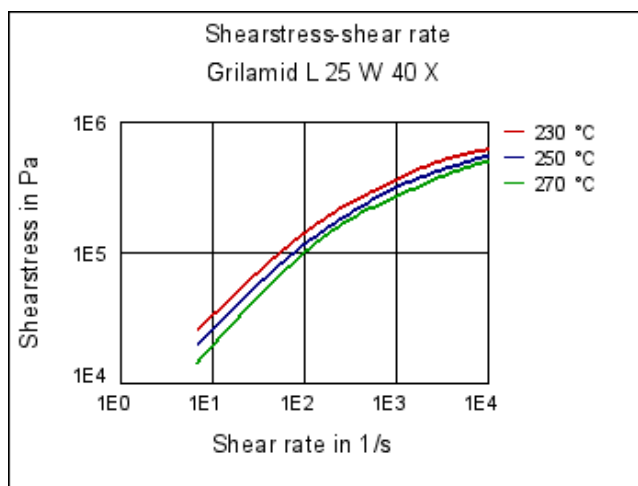


**Grilamid L 25 W 40 X**


PA12-I

EMS-GRIVORY | a unit of EMS-CHEMIE AG


**Dynamic Shear modulus-temperature**

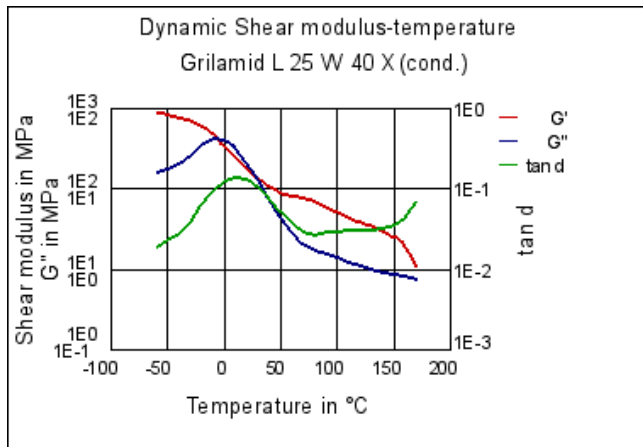

**Stress-strain**

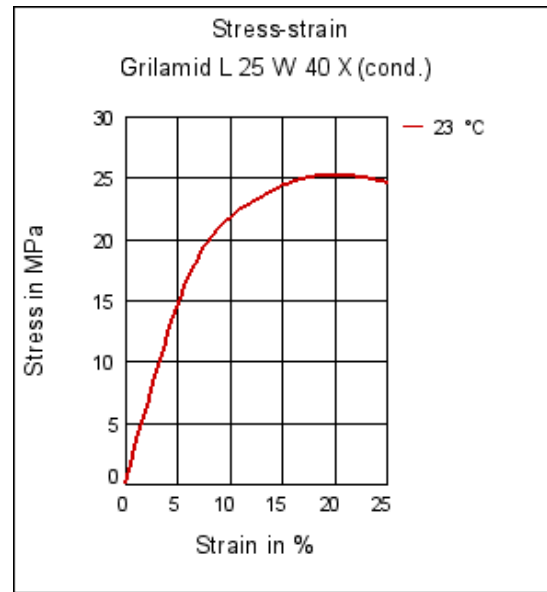

**Secant modulus-strain**

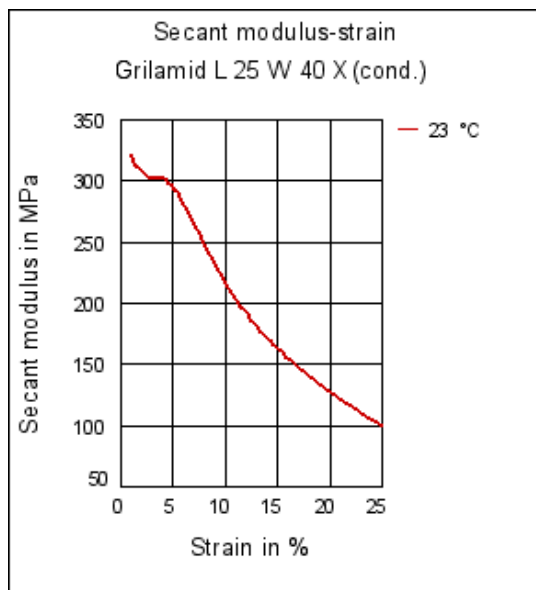

**Characteristics**

**Processing**

Other Extrusion

**Delivery form**

Granules

**Additives**

Plasticizer

**Product Attributes**

Flexible, High viscosity

**Automotive**

Air intake systems, Compressed air systems, Hydraulic systems, Fuel systems

**Grilamid L 25 W 40 X**

PA12-I

EMS-GRIVORY | a unit of EMS-CHEMIE AG

**Special Characteristics**

High impact or impact modified, Improved UV resistance (outdoor use), Improved heat resistance

**Regional Availability**

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

**Electricals & Electronics**









Cables & Tubes

**Industry & Consumer goods**




Hydraulics & Pneumatics

**Chemical Media Resistance**




**Acids**

-  Acetic Acid (5% by mass) (23°C)
-  Citric Acid solution (10% by mass) (23°C)
-  Lactic Acid (10% by mass) (23°C)
-  Hydrochloric Acid (36% by mass) (23°C)
-  Nitric Acid (40% by mass) (23°C)
-  Sulfuric Acid (38% by mass) (23°C)
-  Sulfuric Acid (5% by mass) (23°C)
-  Chromic Acid solution (40% by mass) (23°C)




**Bases**

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

**Alcohols**

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)


**Hydrocarbons**

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)





**Ketones**

-  Acetone (23°C)


**Ethers**

-  Diethyl ether (23°C)

**Mineral oils**

-  SAE 10W40 multigrade motor oil (23°C)
-  SAE 10W40 multigrade motor oil (130°C)
-  SAE 80/90 hypoid-gear oil (130°C)
-  Insulating Oil (23°C)

**Standard Fuels**

-  ISO 1817 Liquid 1 (60°C)

Grilamid L 25 W 40 X

PA12-I

EMS-GRIVORY | a unit of EMS-CHEMIE AG

- ☹️ ISO 1817 Liquid 2 (60°C)
- ☹️ ISO 1817 Liquid 3 (60°C)
- ☹️ ISO 1817 Liquid 4 (60°C)
- ☹️ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ☹️ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ☹️ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ☹️ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ☹️ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ☹️ Sodium Chloride solution (10% by mass) (23°C)
- ☹️ Sodium Hypochlorite solution (10% by mass) (23°C)
- ☹️ Sodium Carbonate solution (20% by mass) (23°C)
- ☹️ Sodium Carbonate solution (2% by mass) (23°C)
- ☹️ Zinc Chloride solution (50% by mass) (23°C)

Other

- ☹️ Ethyl Acetate (23°C)
- ☹️ Hydrogen peroxide (23°C)
- ☹️ DOT No. 4 Brake fluid (130°C)
- ☹️ Ethylene Glycol (50% by mass) in water (108°C)
- ☹️ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ☹️ 50% Oleic acid + 50% Olive Oil (23°C)
- ☹️ Water (23°C)
- ☹️ Deionized water (90°C)
- 🚫 Phenol solution (5% by mass) (23°C)