

Grilamid LV-3A H

PA12-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG

Product Texts

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	6500 / 5700	MPa	ISO 527-1/-2
Stress at break	120 / 110	MPa	ISO 527-1/-2
Strain at break	6 / 6	%	ISO 527-1/-2
Charpy impact strength (+23°C)	- / 80	kJ/m ²	ISO 179/1eU
Charpy impact strength (-30°C)	- / 80	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	- / 25	kJ/m ²	ISO 179/1eA
Charpy notched impact strength (-30°C)	- / 15	kJ/m ²	ISO 179/1eA

Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Shore D hardness (15s)	- / 80	-	ISO 868
Ball indentation hardness	- / 120	MPa	ISO 2039-1


Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	180 / -	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	165 / -	°C	ISO 75-1/-2
Temp. of deflection under load (8.00 MPa)	90 / -	°C	ISO 75-1/-2
Max. usage temperature (long term)	90 - 120	°C	ISO 2578
Max. usage temperature (short term)	150	°C	EMS

Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	- / 1E11	Ohm*m	IEC 60093
Surface resistivity	- / 1E12	Ohm	IEC 60093
Electric strength	- / 32	kV/mm	IEC 60243-1
Comparative tracking index	- / 575	-	IEC 60112


Other properties	dry / cond	Unit	Test Standard
Water absorption	1.4 / -	%	Sim. to ISO 62
Humidity absorption	0.6 / -	%	Sim. to ISO 62
Density	1220 / -	kg/m ³	ISO 1183

Diagrams


Viscosity-shear rate

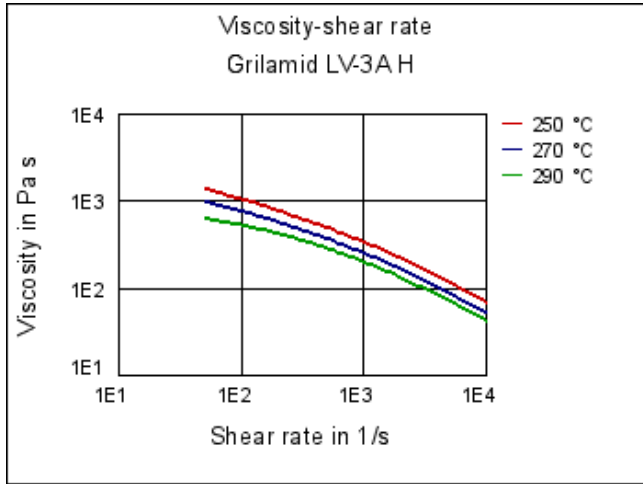


Shearstress-shear rate

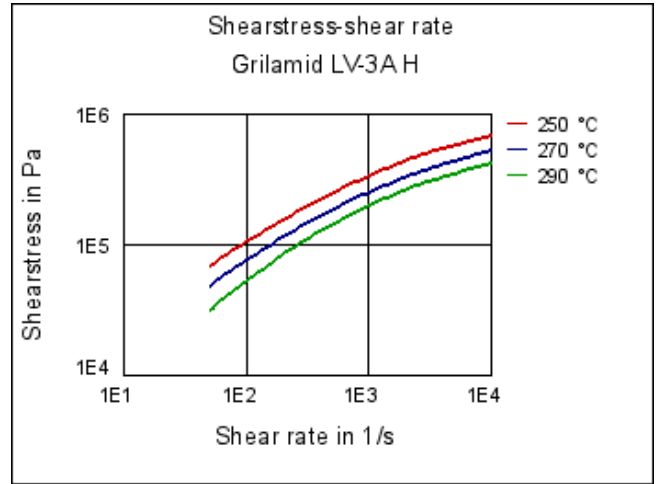


Dynamic Shear modulus-temperature

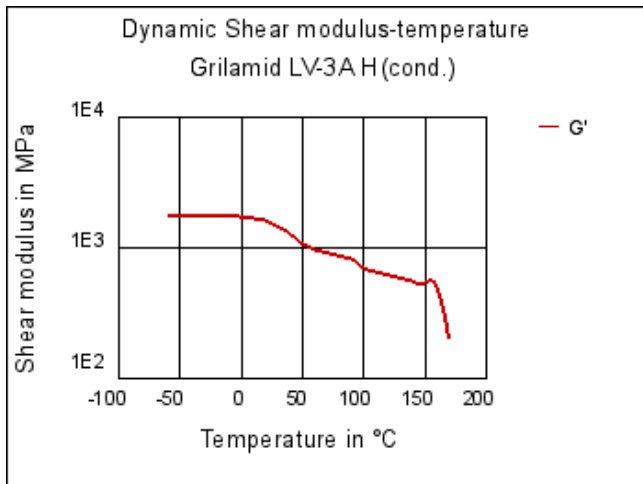

Stress-strain

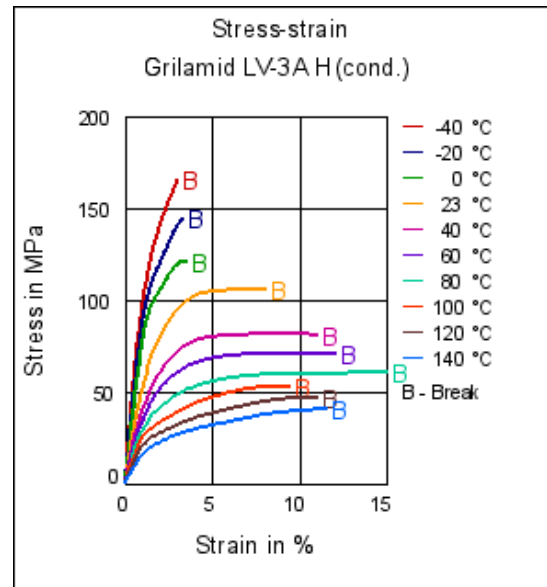

Secant modulus-strain

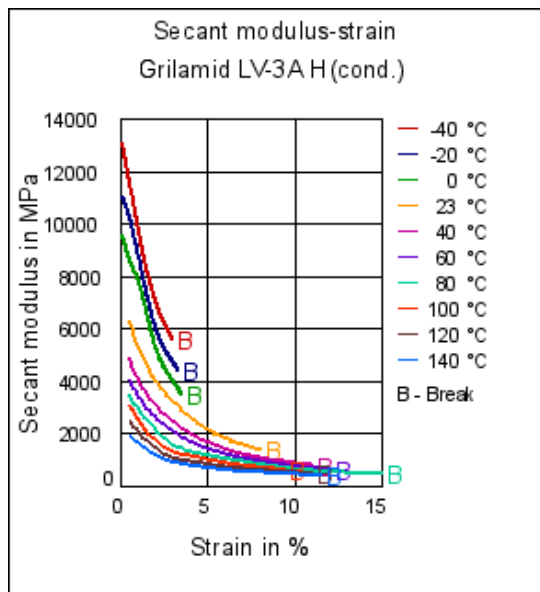

Characteristics

Processing

Injection Molding

Delivery form

Granules

Special Characteristics

High impact or impact modified, Improved UV resistance (outdoor use), Improved heat resistance

Regional Availability

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Chemical Media Resistance

Acids

- 😊 Acetic Acid (5% by mass) (23°C)
- 😊 Citric Acid solution (10% by mass) (23°C)
- 😊 Lactic Acid (10% by mass) (23°C)
- 🚫 Hydrochloric Acid (36% by mass) (23°C)
- 🚫 Nitric Acid (40% by mass) (23°C)
- 😊 Sulfuric Acid (38% by mass) (23°C)
- 😊 Sulfuric Acid (5% by mass) (23°C)
- 🚫 Chromic Acid solution (40% by mass) (23°C)

Bases

- 😊 Sodium Hydroxide solution (35% by mass) (23°C)

Product Attributes

Hydrolysis resistant

Automotive

Cooling and climate control, Fuel systems



Industry & Consumer goods

Heating systems




Grilamid LV-3A H

PA12-GF30




EMS-GRIVORY | a unit of EMS-CHEMIE AG

-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)


Hydrocarbons

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)





Ketones

-  Acetone (23°C)










Ethers

-  Diethyl ether (23°C)






Mineral oils

-  SAE 10W40 multigrade motor oil (23°C)
-  SAE 10W40 multigrade motor oil (130°C)
-  SAE 80/90 hypoid-gear oil (130°C)
-  Insulating Oil (23°C)






Standard Fuels

-  ISO 1817 Liquid 1 (60°C)
-  ISO 1817 Liquid 2 (60°C)
-  ISO 1817 Liquid 3 (60°C)
-  ISO 1817 Liquid 4 (60°C)
-  Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

-  Sodium Chloride solution (10% by mass) (23°C)
-  Sodium Hypochlorite solution (10% by mass) (23°C)
-  Sodium Carbonate solution (20% by mass) (23°C)
-  Sodium Carbonate solution (2% by mass) (23°C)
-  Zinc Chloride solution (50% by mass) (23°C)





Other

-  Ethyl Acetate (23°C)
-  Hydrogen peroxide (23°C)
-  DOT No. 4 Brake fluid (130°C)
-  Ethylene Glycol (50% by mass) in water (108°C)
-  1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)

Grilamid LV-3A H

PA12-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG

-  50% Oleic acid + 50% Olive Oil (23°C)
 -  Water (23°C)
 -  Deionized water (90°C)
 -  Phenol solution (5% by mass) (23°C)
-