

**Grilamid TR 55**

PA12/MACMI

EMS-GRIVORY | a unit of EMS-CHEMIE AG

**Product Texts**

Product designation according to ISO 1874:

PA 12/MACMI, GT, 11-020

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	<b>2200 / 2200</b>	MPa	ISO 527-1/-2
Yield stress	<b>75 / 75</b>	MPa	ISO 527-1/-2
Yield strain	<b>7 / 9</b>	%	ISO 527-1/-2
Nominal strain at break	<b>&gt;50 / &gt;50</b>	%	ISO 527-1/-2
Charpy impact strength (+23°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength (-30°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength (+23°C)	<b>7 / 8</b>	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength (-30°C)	<b>7 / 7</b>	kJ/m <sup>2</sup>	ISO 179/1eA

Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Ball indentation hardness	<b>- / 120</b>	MPa	ISO 2039-1

Thermal properties	dry / cond	Unit	Test Standard
Glass transition temperature (10°C/min)	<b>160 / -</b>	°C	ISO 11357-1/-2
Temp. of deflection under load (1.80 MPa)	<b>130 / -</b>	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	<b>145 / -</b>	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	<b>80 / -</b>	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	<b>80 / -</b>	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	<b>HB / -</b>	class	IEC 60695-11-10
Thickness tested	<b>0.8 / -</b>	mm	IEC 60695-11-10
Max. usage temperature (long term)	<b>80 - 100</b>	°C	ISO 2578
Max. usage temperature (short term)	<b>120</b>	°C	EMS

Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	<b>- / 1E11</b>	Ohm*m	IEC 60093
Surface resistivity	<b>- / 1E12</b>	Ohm	IEC 60093
Electric strength	<b>- / 31</b>	kV/mm	IEC 60243-1
Comparative tracking index	<b>- / 600</b>	-	IEC 60112

Other properties	dry / cond	Unit	Test Standard
Water absorption	<b>3.5 / -</b>	%	Sim. to ISO 62
Humidity absorption	<b>1.5 / -</b>	%	Sim. to ISO 62
Density	<b>1060 / -</b>	kg/m <sup>3</sup>	ISO 1183


Rheo/Phys properties	dry / cond	Unit	Test Standard
Molding shrinkage (parallel)	<b>0.6 / -</b>	%	ISO 294-4, 2577
Molding shrinkage (normal)	<b>0.7 / -</b>	%	ISO 294-4, 2577

**Diagrams**


**Grilamid TR 55**  
PA12/MACMI

EMS-GRIVORY | a unit of EMS-CHEMIE AG


Viscosity-shear rate

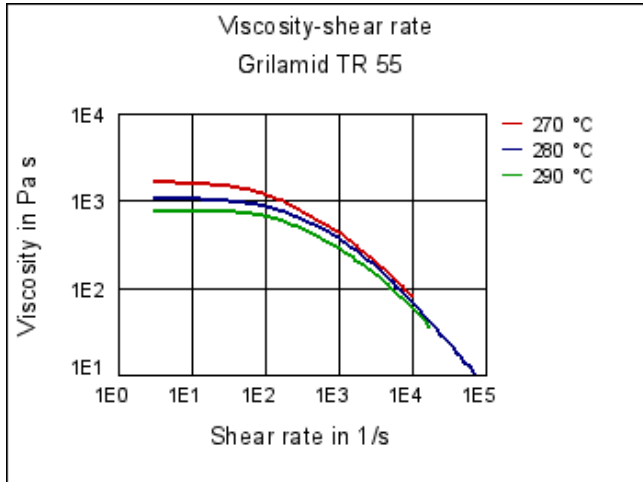


Shearstress-shear rate

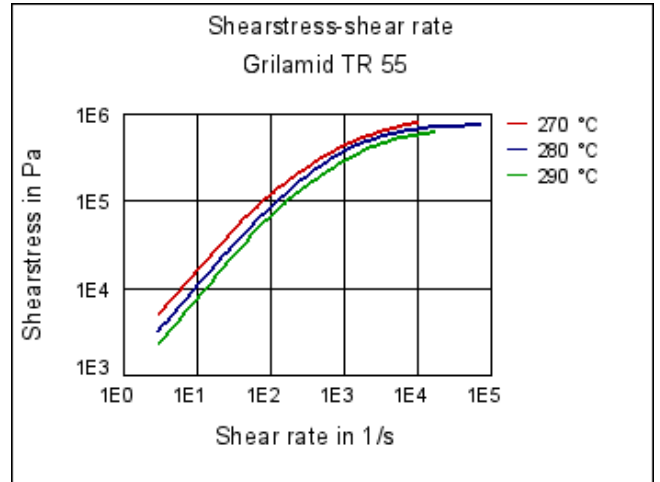


Dynamic Shear modulus-temperature

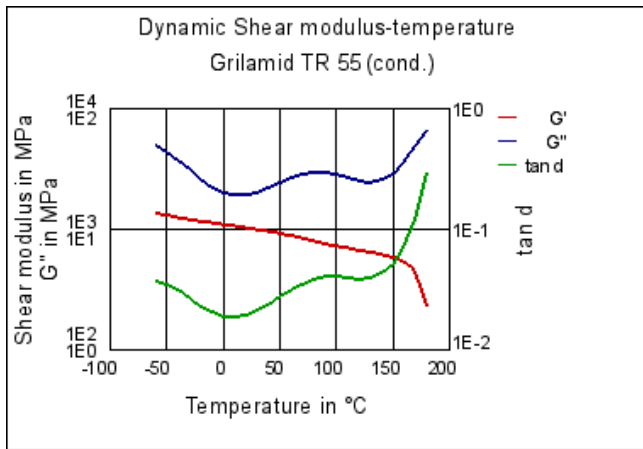


Stress-strain

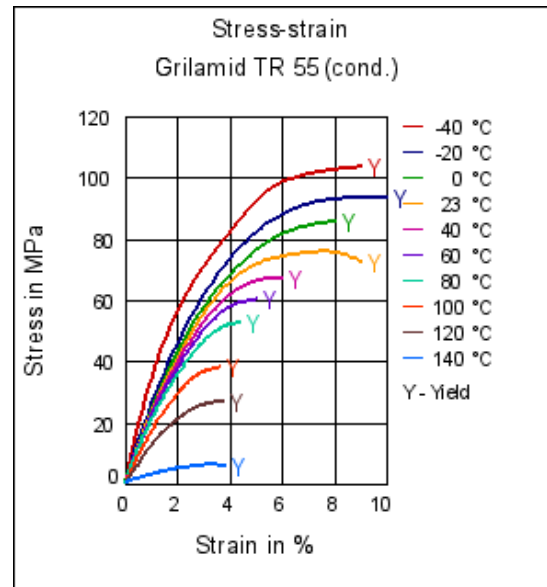


Secant modulus-strain

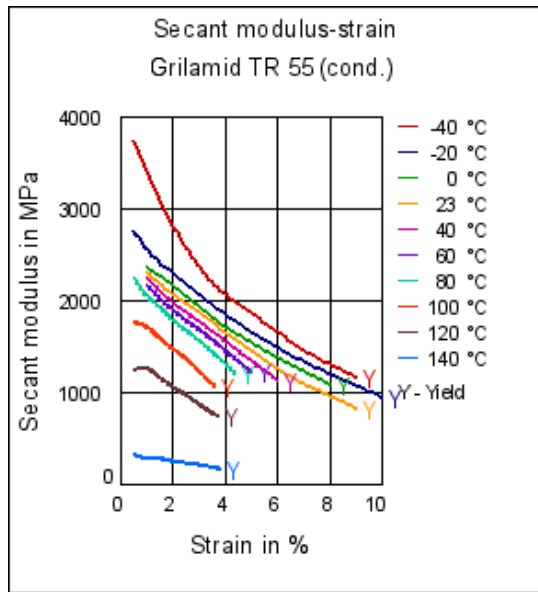


Stress-strain (isochronous) 23°C

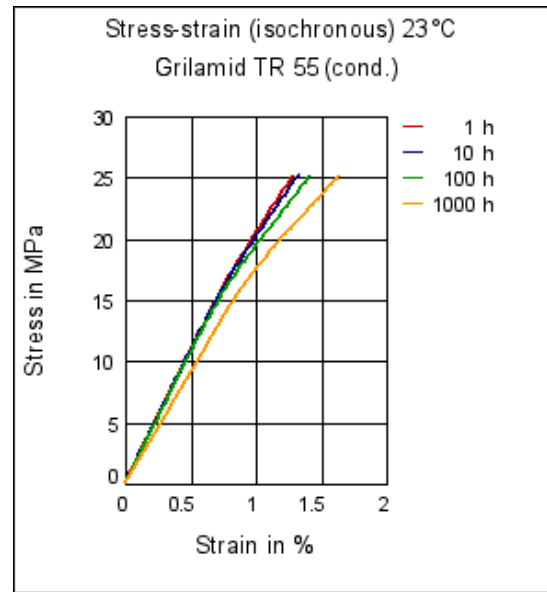

Creep curve °C

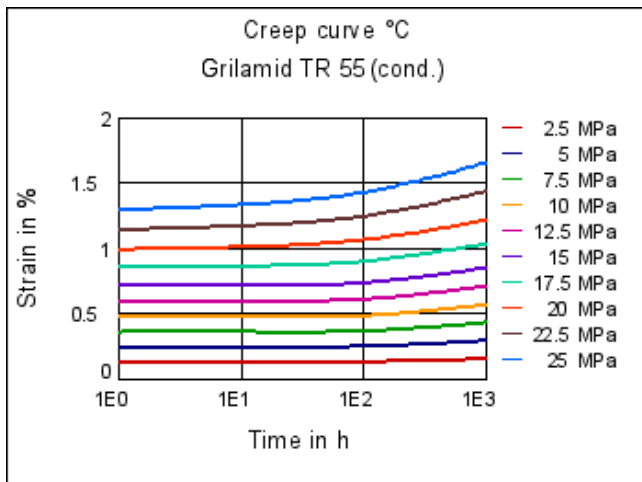


Creep modulus-time 23°C

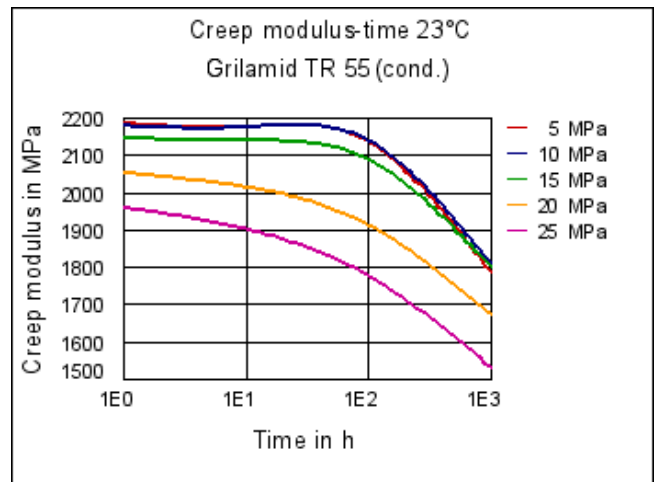


**Grilamid TR 55**  
PA12/MACMI

EMS-GRIVORY | a unit of EMS-CHEMIE AG


**Specific volume-temperature (pvT)**

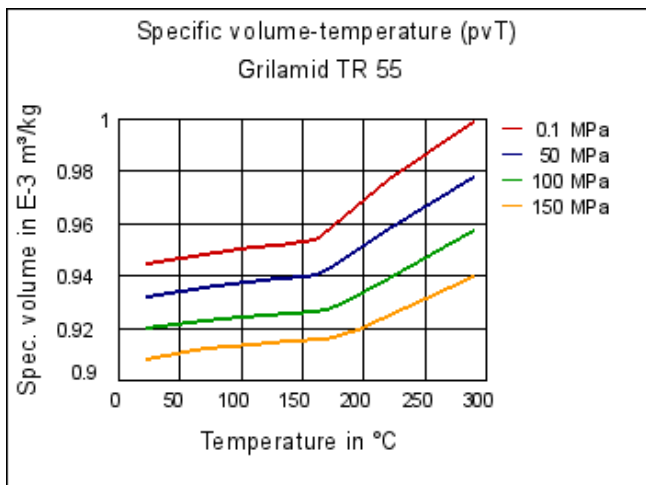

**Tensile modulus-temperature**

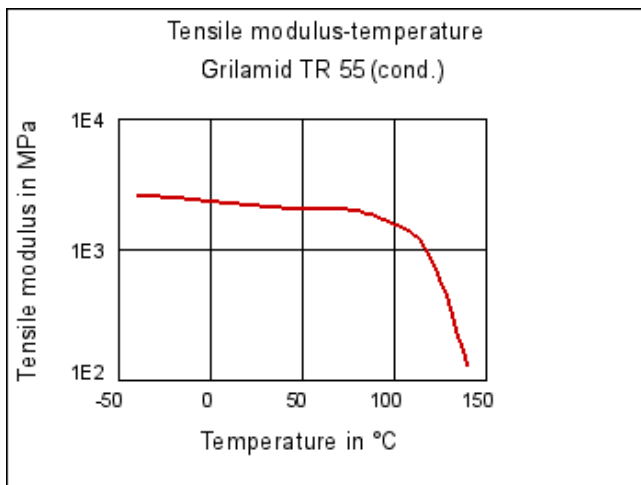

**Stress-Strain (Film Grades)**

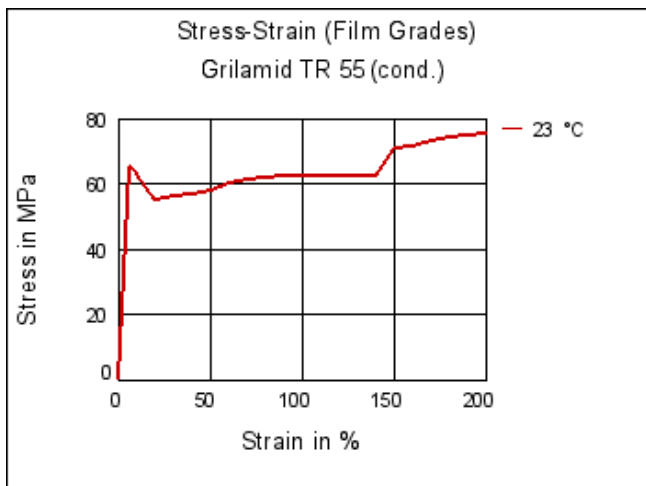

**Characteristics**

**Processing**

Injection Molding, Other Extrusion

**Delivery form**

Granules

**Special Characteristics**

Transparent

**Regional Availability**

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

**Optics**

Lenses, Optical components

**Packaging**

Non oriented film, Cosmetics / Personal care, Medical packaging

**Burning Behaviour**

UL V2

**Food Contact**

EU Requirements, FDA

**Biocompatibility**

USP VI, ISO 10993

## Grilamid TR 55

PA12/MACMI

EMS-GRIVORY | a unit of EMS-CHEMIE AG

### Automotive

Automotive electr. and electronics, lighting, Cooling and climate control, Fuel systems, Powertrain and Chassis , Interior

### Potable Water Contact

NSF 61, KTW, WRAS, DVGW W270

### Electricals & Electronics









Electrical appliances, Electrical equipment, Cables & Tubes, Energy distribution, Lighting, Mobile phones and other portable devices

### Industry & Consumer goods




Heating systems, Housewares, Hydraulics & Pneumatics, Mechanical Engineering, Medical devices, Power transmission, Sanitary, water and gas supply, Sports & Leisure, Tools & Accessories

### Chemical Media Resistance




#### Acids

-  Acetic Acid (5% by mass) (23°C)
-  Citric Acid solution (10% by mass) (23°C)
-  Lactic Acid (10% by mass) (23°C)
-  Hydrochloric Acid (36% by mass) (23°C)
-  Nitric Acid (40% by mass) (23°C)
-  Sulfuric Acid (38% by mass) (23°C)
-  Sulfuric Acid (5% by mass) (23°C)
-  Chromic Acid solution (40% by mass) (23°C)




#### Bases

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

#### Alcohols

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)


#### Hydrocarbons

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)

#### Ketones

-  Acetone (23°C)

#### Ethers

-  Diethyl ether (23°C)




#### Mineral oils

-  SAE 10W40 multigrade motor oil (23°C)










**Grilamid TR 55**

PA12/MACMI






EMS-GRIVORY | a unit of EMS-CHEMIE AG

-  SAE 10W40 multigrade motor oil (130°C)
-  SAE 80/90 hypoid-gear oil (130°C)
-  Insulating Oil (23°C)










**Standard Fuels**

-  ISO 1817 Liquid 1 (60°C)
-  ISO 1817 Liquid 2 (60°C)
-  ISO 1817 Liquid 3 (60°C)
-  ISO 1817 Liquid 4 (60°C)
-  Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

**Salt solutions**

-  Sodium Chloride solution (10% by mass) (23°C)
-  Sodium Hypochlorite solution (10% by mass) (23°C)
-  Sodium Carbonate solution (20% by mass) (23°C)
-  Sodium Carbonate solution (2% by mass) (23°C)
-  Zinc Chloride solution (50% by mass) (23°C)

**Other**

-  Ethyl Acetate (23°C)
-  Hydrogen peroxide (23°C)
-  DOT No. 4 Brake fluid (130°C)
-  Ethylene Glycol (50% by mass) in water (108°C)
-  1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
-  50% Oleic acid + 50% Olive Oil (23°C)
-  Water (23°C)
-  Deionized water (90°C)
-  Phenol solution (5% by mass) (23°C)