

Grilon BG-30 HM

PA6-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG

Product Texts

Product designation according to ISO 1874:

PA 6-HI, MH, 18-090, GF30

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	8700 / 6500	MPa	ISO 527-1/-2
Stress at break	140 / 95	MPa	ISO 527-1/-2
Strain at break	3 / 5	%	ISO 527-1/-2
Charpy impact strength (+23°C)	60 / 60	kJ/m ²	ISO 179/1eU
Charpy impact strength (-30°C)	50 / 45	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	12 / 14	kJ/m ²	ISO 179/1eA
Charpy notched impact strength (-30°C)	9 / 9	kJ/m ²	ISO 179/1eA

Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Ball indentation hardness	180 / 120	MPa	ISO 2039-1

Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	222 / -	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	170 / -	°C	ISO 75-1/-2
Temp. of deflection under load (8.00 MPa)	95 / -	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	30 / -	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	110 / -	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	HB / -	class	IEC 60695-11-10
Thickness tested	0.8 / -	mm	IEC 60695-11-10
Max. usage temperature (long term)	80 - 110	°C	ISO 2578
Max. usage temperature (short term)	160	°C	EMS

Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	1E12 / 1E11	Ohm*m	IEC 60093
Surface resistivity	- / 1E12	Ohm	IEC 60093
Electric strength	40 / 38	kV/mm	IEC 60243-1
Comparative tracking index	- / 600	-	IEC 60112

Other properties	dry / cond	Unit	Test Standard
Water absorption	5 / -	%	Sim. to ISO 62
Humidity absorption	1 / -	%	Sim. to ISO 62
Density	1260 / -	kg/m ³	ISO 1183

Rheo/Phys properties	dry / cond	Unit	Test Standard
Molding shrinkage (parallel)	0.1 / -	%	ISO 294-4, 2577
Molding shrinkage (normal)	0.3 / -	%	ISO 294-4, 2577


Diagrams

Grilon BG-30 HM


PA6-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG


Dynamic Shear modulus-temperature

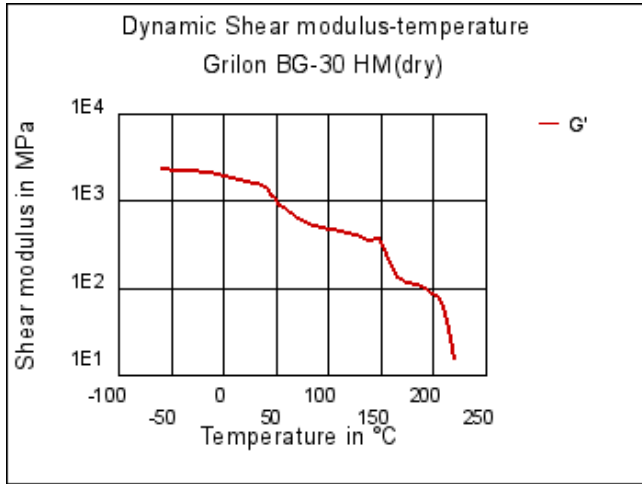


Dynamic Shear modulus-temperature

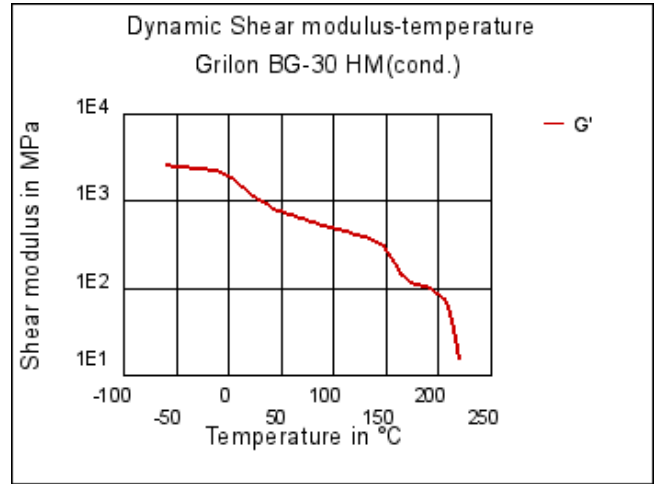


Stress-strain

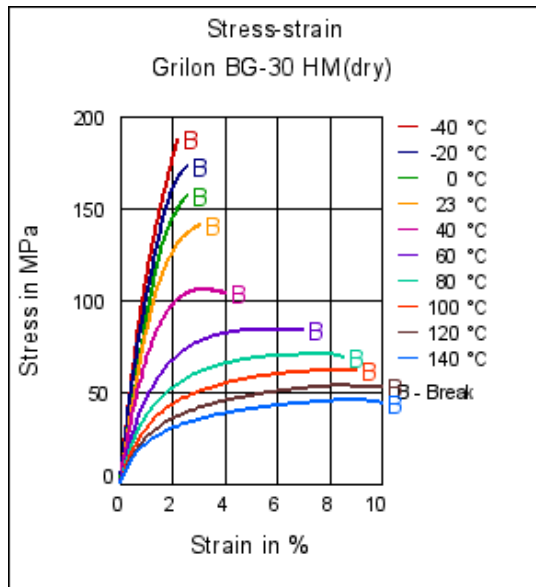


Stress-strain

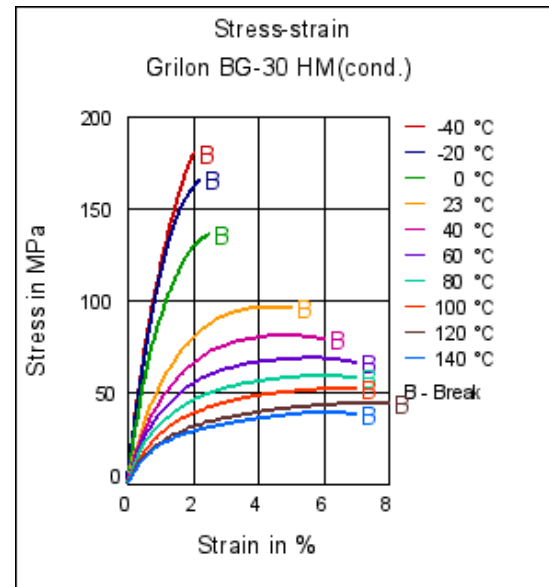


Secant modulus-strain

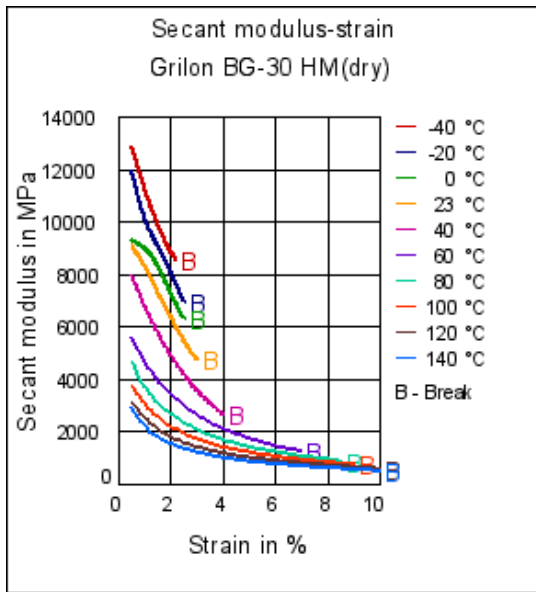

Secant modulus-strain

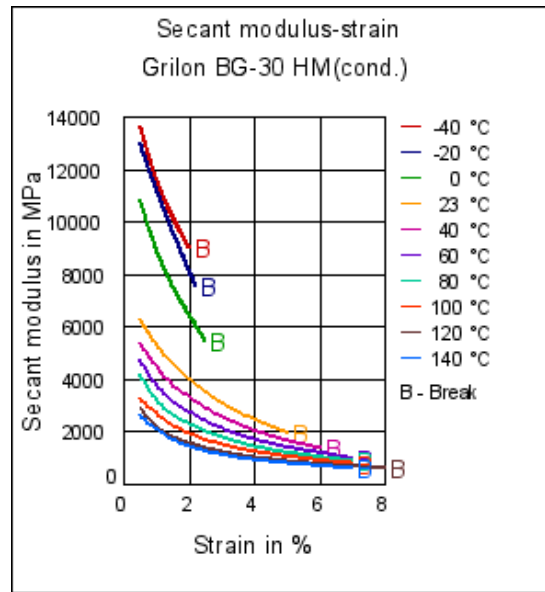

Tensile modulus-temperature

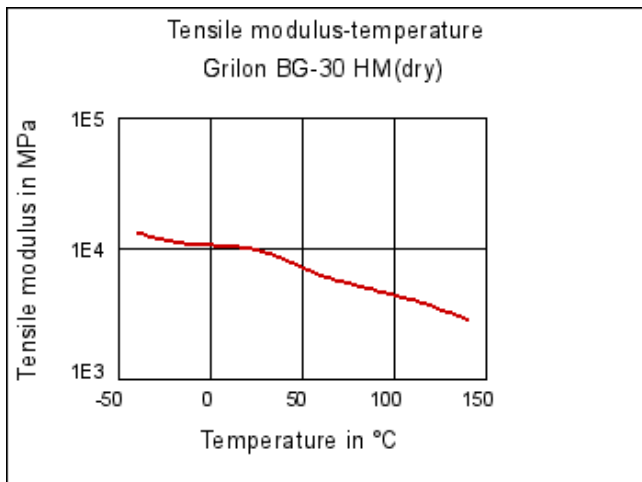

Characteristics

Processing

Injection Molding

Delivery form

Granules

Special Characteristics

High impact or impact modified

Chemical Media Resistance

Regional Availability

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Automotive

Air intake systems, Interior

Electricals & Electronics









Electrical appliances, Electrical equipment

Grilon BG-30 HM




PA6-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG




Acids

-  Acetic Acid (5% by mass) (23°C)
-  Citric Acid solution (10% by mass) (23°C)
-  Lactic Acid (10% by mass) (23°C)
-  Hydrochloric Acid (36% by mass) (23°C)
-  Nitric Acid (40% by mass) (23°C)
-  Sulfuric Acid (38% by mass) (23°C)
-  Sulfuric Acid (5% by mass) (23°C)
-  Chromic Acid solution (40% by mass) (23°C)




Bases

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)


Hydrocarbons

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)





Ketones

-  Acetone (23°C)










Ethers

-  Diethyl ether (23°C)

Mineral oils

-  SAE 10W40 multigrade motor oil (23°C)
-  SAE 10W40 multigrade motor oil (130°C)
-  SAE 80/90 hypoid-gear oil (130°C)
-  Insulating Oil (23°C)

Standard Fuels

-  ISO 1817 Liquid 1 (60°C)
-  ISO 1817 Liquid 2 (60°C)
-  ISO 1817 Liquid 3 (60°C)
-  ISO 1817 Liquid 4 (60°C)
-  Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

Grilon BG-30 HM

PA6-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG

- ☹️ Sodium Chloride solution (10% by mass) (23°C)
- 🚫 Sodium Hypochlorite solution (10% by mass) (23°C)
- ☹️ Sodium Carbonate solution (20% by mass) (23°C)
- ☹️ Sodium Carbonate solution (2% by mass) (23°C)
- ☹️ Zinc Chloride solution (50% by mass) (23°C)

Other

- ☹️ Ethyl Acetate (23°C)
 - 🚫 Hydrogen peroxide (23°C)
 - ☹️ DOT No. 4 Brake fluid (130°C)
 - ☹️ Ethylene Glycol (50% by mass) in water (108°C)
 - ☹️ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
 - ☹️ 50% Oleic acid + 50% Olive Oil (23°C)
 - ☹️ Water (23°C)
 - ☹️ Deionized water (90°C)
 - 🚫 Phenol solution (5% by mass) (23°C)
-