

**Grilon BRZ 334 H**

PA6

EMS-GRIVORY | a unit of EMS-CHEMIE AG

**Product Texts**

Product designation according to ISO 1874:

PA6-HI, GHR, 24-010 N

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	<b>950 / 300</b>	MPa	ISO 527-1/-2
Stress at 50% strain	<b>40 / 20</b>	MPa	ISO 527-1/-2
Strain at break	<b>&gt;50 / &gt;50</b>	%	ISO 527-1/-2
Charpy impact strength (+23°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength (-30°C)	<b>N / N</b>	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength (+23°C)	<b>100 / N</b>	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength (-30°C)	<b>85 / 85</b>	kJ/m <sup>2</sup>	ISO 179/1eA

Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Shore D hardness (15s)	<b>63 / 55</b>	-	ISO 868

Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	<b>222 / -</b>	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	<b>45 / -</b>	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	<b>55 / -</b>	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	<b>120 / -</b>	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	<b>140 / -</b>	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	<b>HB / -</b>	class	IEC 60695-11-10
Thickness tested	<b>0.8 / -</b>	mm	IEC 60695-11-10
Max. usage temperature (long term)	<b>100 - 120</b>	°C	ISO 2578
Max. usage temperature (short term)	<b>180</b>	°C	EMS

Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	<b>1E11 / 1E8</b>	Ohm*m	IEC 60093
Surface resistivity	<b>- / 1E9</b>	Ohm	IEC 60093
Electric strength	<b>26 / 22</b>	kV/mm	IEC 60243-1
Comparative tracking index	<b>- / 600</b>	-	IEC 60112

Other properties	dry / cond	Unit	Test Standard
Water absorption	<b>5 / -</b>	%	Sim. to ISO 62
Humidity absorption	<b>1.5 / -</b>	%	Sim. to ISO 62
Density	<b>1000 / -</b>	kg/m <sup>3</sup>	ISO 1183


**Diagrams**

**Grilon BRZ 334 H**


PA6

EMS-GRIVORY | a unit of EMS-CHEMIE AG

**Dynamic Shear modulus-temperature**

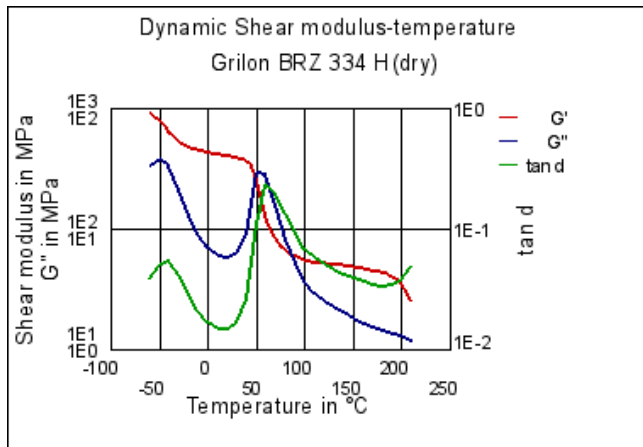

**Dynamic Shear modulus-temperature**

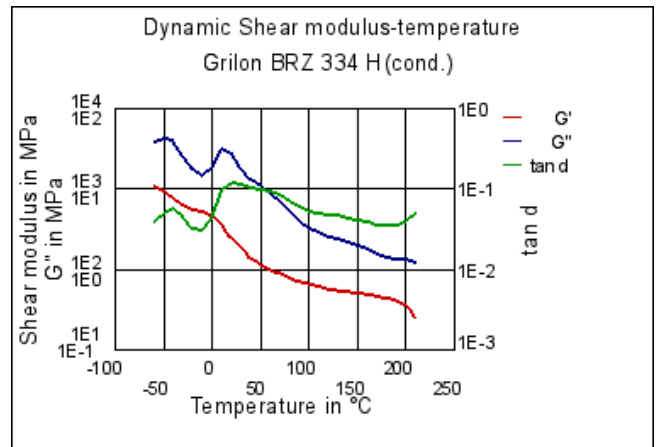

**Characteristics**

**Processing**

Other Extrusion

**Delivery form**

Granules

**Special Characteristics**

High impact or impact modified

**Regional Availability**

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

**Product Attributes**

Flexible

**Automotive**

Air intake systems, Cooling and climate control

**Electricals & Electronics**

Cables & Tubes

**Industry & Consumer goods**

Hydraulics & Pneumatics, Mechanical Engineering, Power transmission

**Chemical Media Resistance**

**Acids**

- 😊 Acetic Acid (5% by mass) (23°C)
- 😊 Citric Acid solution (10% by mass) (23°C)
- 😊 Lactic Acid (10% by mass) (23°C)
- 🚫 Hydrochloric Acid (36% by mass) (23°C)
- 🚫 Nitric Acid (40% by mass) (23°C)
- 🚫 Sulfuric Acid (38% by mass) (23°C)
- 🚫 Sulfuric Acid (5% by mass) (23°C)
- 🚫 Chromic Acid solution (40% by mass) (23°C)

**Bases**

- 😊 Sodium Hydroxide solution (35% by mass) (23°C)
- 😊 Sodium Hydroxide solution (1% by mass) (23°C)
- 😊 Ammonium Hydroxide solution (10% by mass) (23°C)

**Alcohols**

- 😊 Isopropyl alcohol (23°C)

**Grilon BRZ 334 H**

PA6

EMS-GRIVORY | a unit of EMS-CHEMIE AG

 Methanol (23°C)

 Ethanol (23°C)

**Hydrocarbons**

 n-Hexane (23°C)


 Toluene (23°C)

 iso-Octane (23°C)

**Ketones**

 Acetone (23°C)

**Ethers**


 Diethyl ether (23°C)

**Mineral oils**


 SAE 10W40 multigrade motor oil (23°C)


 SAE 10W40 multigrade motor oil (130°C)


 SAE 80/90 hypoid-gear oil (130°C)


 Insulating Oil (23°C)


**Standard Fuels**


 ISO 1817 Liquid 1 (60°C)


 ISO 1817 Liquid 2 (60°C)

 ISO 1817 Liquid 3 (60°C)

 ISO 1817 Liquid 4 (60°C)

 Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)

 Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)


 Diesel fuel (pref. ISO 1817 Liquid F) (23°C)


 Diesel fuel (pref. ISO 1817 Liquid F) (90°C)


 Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)


**Salt solutions**

 Sodium Chloride solution (10% by mass) (23°C)

 Sodium Hypochlorite solution (10% by mass) (23°C)


 Sodium Carbonate solution (20% by mass) (23°C)

 Sodium Carbonate solution (2% by mass) (23°C)


 Zinc Chloride solution (50% by mass) (23°C)

**Other**


 Ethyl Acetate (23°C)


 Hydrogen peroxide (23°C)


 DOT No. 4 Brake fluid (130°C)


 Ethylene Glycol (50% by mass) in water (108°C)

 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)

 50% Oleic acid + 50% Olive Oil (23°C)

 Water (23°C)

 Deionized water (90°C)

 Phenol solution (5% by mass) (23°C)