

Grivory HT2V-3H

PA6T/66-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG

Product Texts

Product designation according to ISO 1874:

PA6T/66, MH, 14-110, GF30

Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	11000 / 11000	MPa	ISO 527-1/-2
Stress at break	175 / 165	MPa	ISO 527-1/-2
Strain at break	2 / 2	%	ISO 527-1/-2
Charpy impact strength (+23°C)	45 / 45	kJ/m ²	ISO 179/1eU
Charpy impact strength (-30°C)	40 / 40	kJ/m ²	ISO 179/1eU
Charpy notched impact strength (+23°C)	9 / 9	kJ/m ²	ISO 179/1eA
Charpy notched impact strength (-30°C)	9 / 8	kJ/m ²	ISO 179/1eA

Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Ball indentation hardness	270 / 250	MPa	ISO 2039-1

Thermal properties	dry / cond	Unit	Test Standard
Melting temperature (10°C/min)	310 / -	°C	ISO 11357-1/-3
Temp. of deflection under load (1.80 MPa)	280 / -	°C	ISO 75-1/-2
Temp. of deflection under load (8.00 MPa)	200 / -	°C	ISO 75-1/-2
Coeff. of linear therm. expansion (parallel)	20 / -	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion (normal)	70 / -	E-6/K	ISO 11359-1/-2
Burning Behav. at thickness h	HB / -	class	IEC 60695-11-10
Thickness tested	0.8 / -	mm	IEC 60695-11-10
Max. usage temperature (long term)	140	°C	ISO 2578
Max. usage temperature (short term)	270	°C	EMS

Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	1E10 / 1E10	Ohm*m	IEC 60093
Surface resistivity	- / 1E12	Ohm	IEC 60093
Electric strength	38 / 38	kV/mm	IEC 60243-1
Comparative tracking index	- / 600	-	IEC 60112

Other properties	dry / cond	Unit	Test Standard
Water absorption	5 / -	%	Sim. to ISO 62
Humidity absorption	1.8 / -	%	Sim. to ISO 62
Density	1420 / -	kg/m ³	ISO 1183

Rheo/Phys properties	dry / cond	Unit	Test Standard
Molding shrinkage (parallel)	0.1 / -	%	ISO 294-4, 2577
Molding shrinkage (normal)	0.8 / -	%	ISO 294-4, 2577


Diagrams

Grivory HT2V-3H


PA6T/66-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG


Viscosity-shear rate

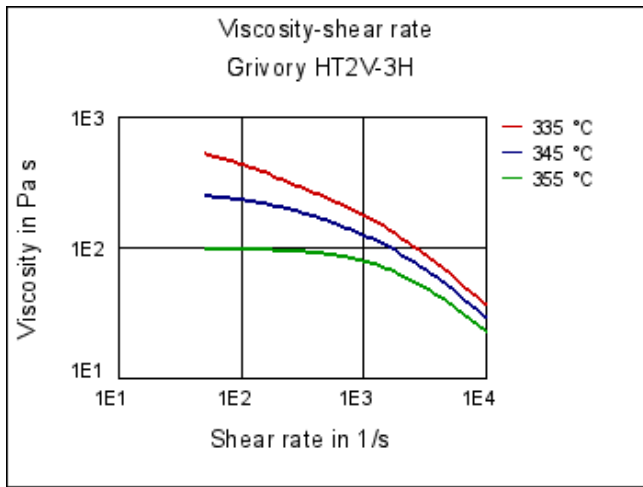


Shearstress-shear rate

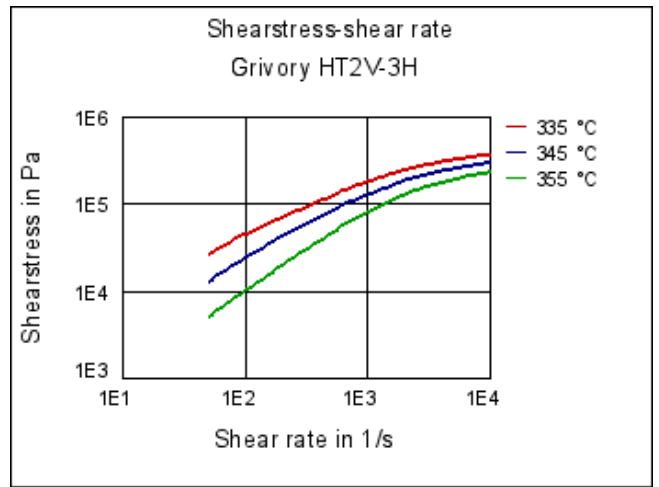

Dynamic Shear modulus-temperature

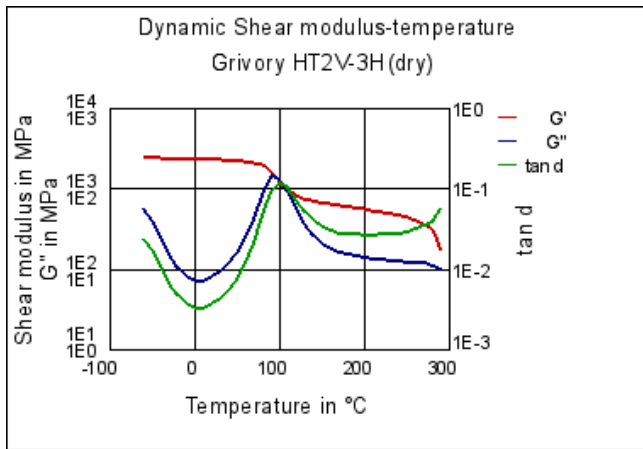

Dynamic Shear modulus-temperature

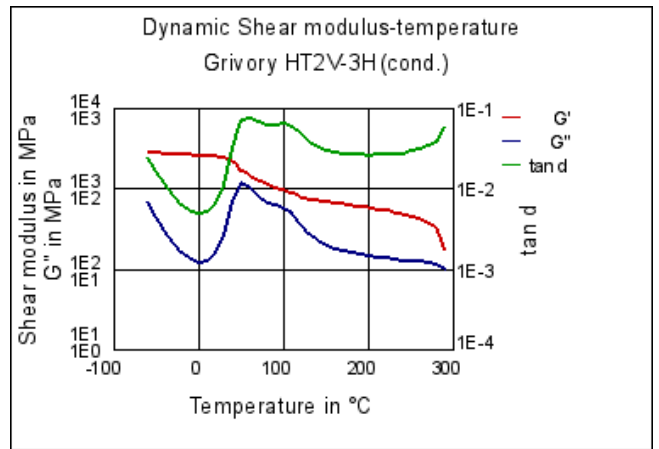


Grivory HT2V-3H


PA6T/66-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG


Stress-strain

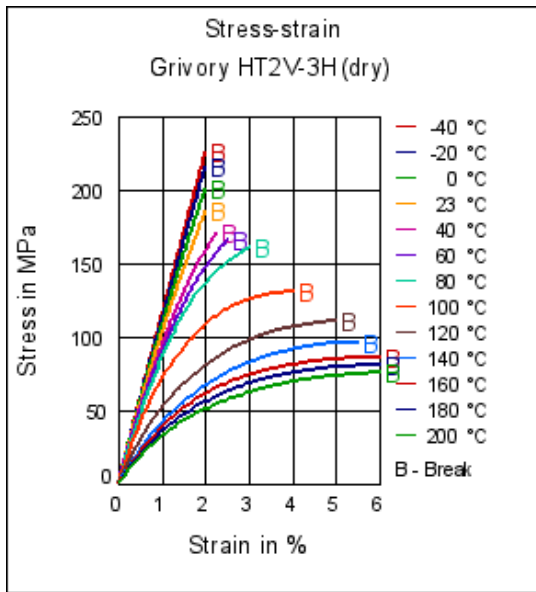


Stress-strain

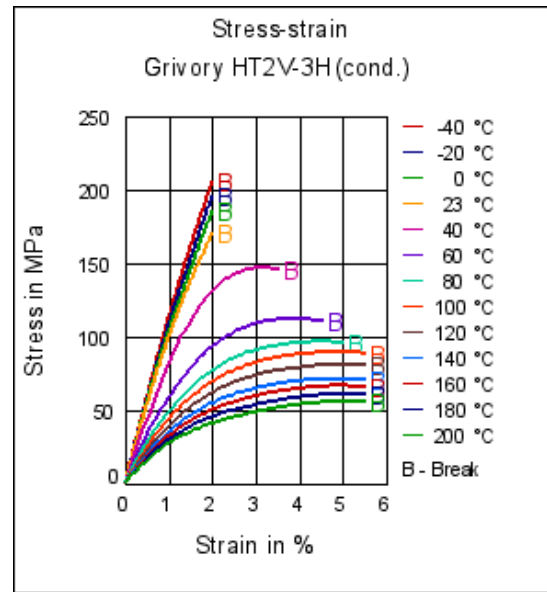

Secant modulus-strain

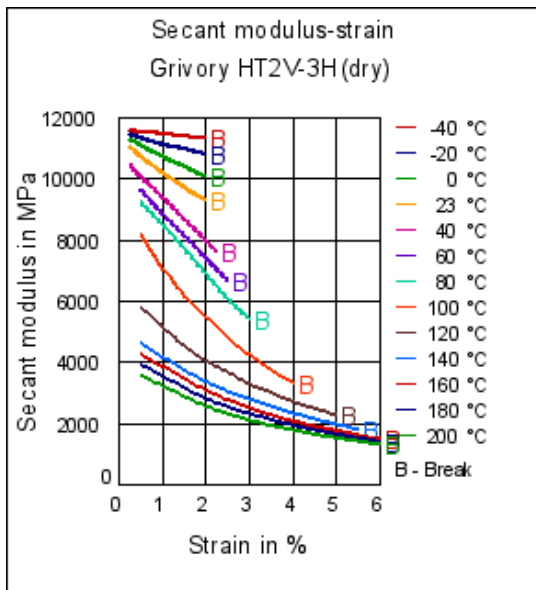

Secant modulus-strain

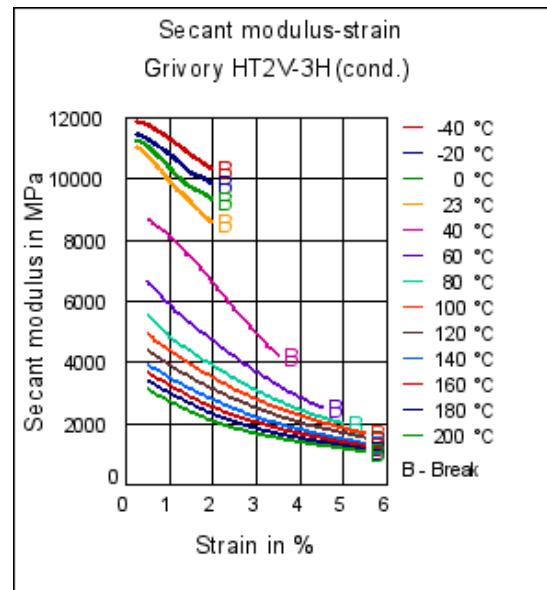


Grivory HT2V-3H


PA6T/66-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG


Stress-strain (isochronous) 23°C

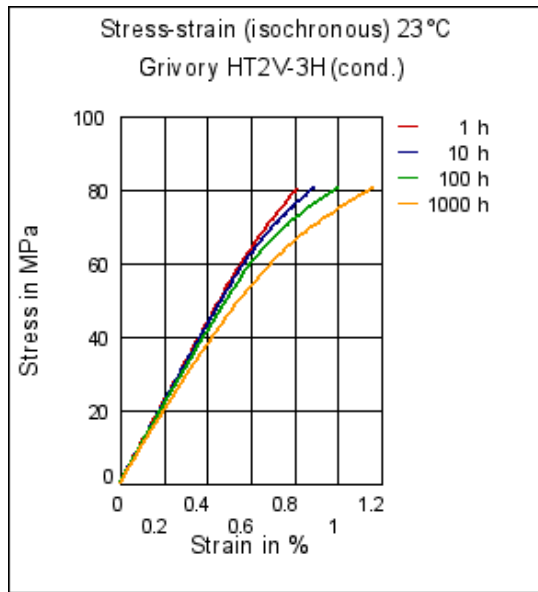


Creep curve °C

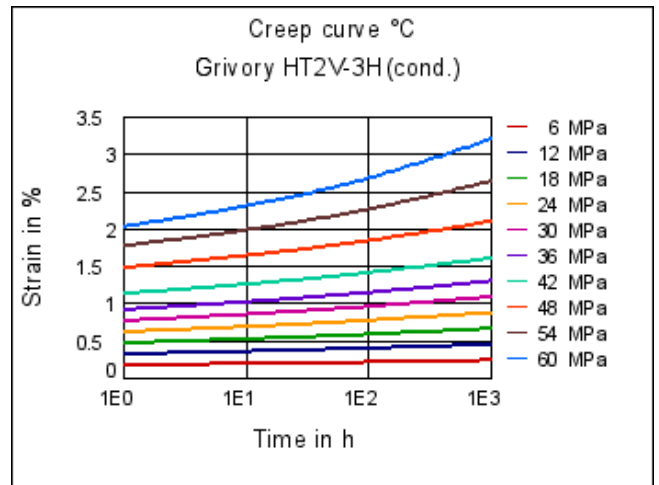

Creep modulus-time 23°C

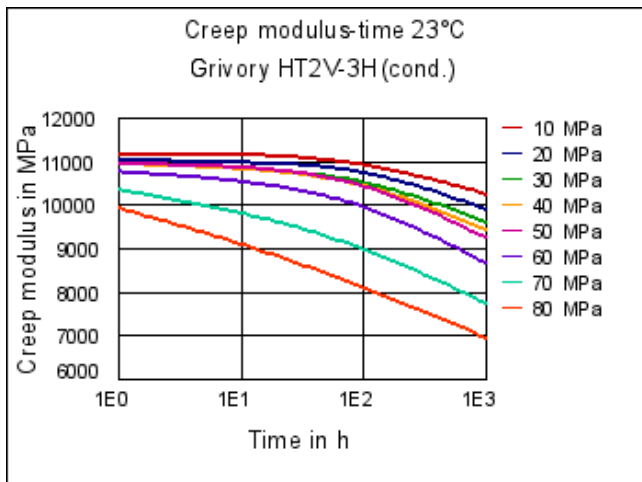

Stress-strain (isochronous) 80°C

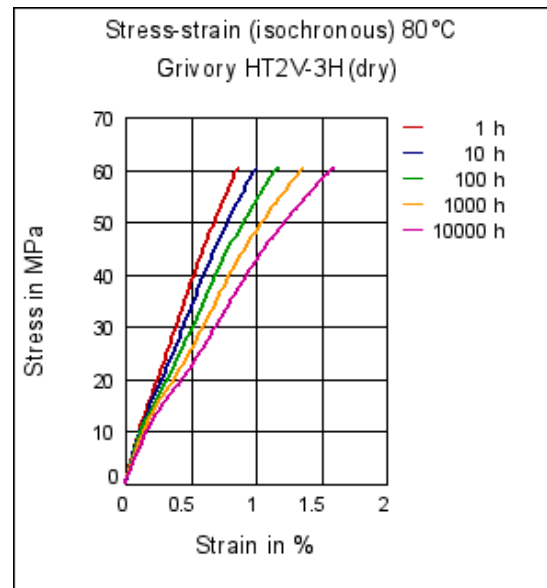


Grivory HT2V-3H


PA6T/66-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG


Creep modulus-time 80°C

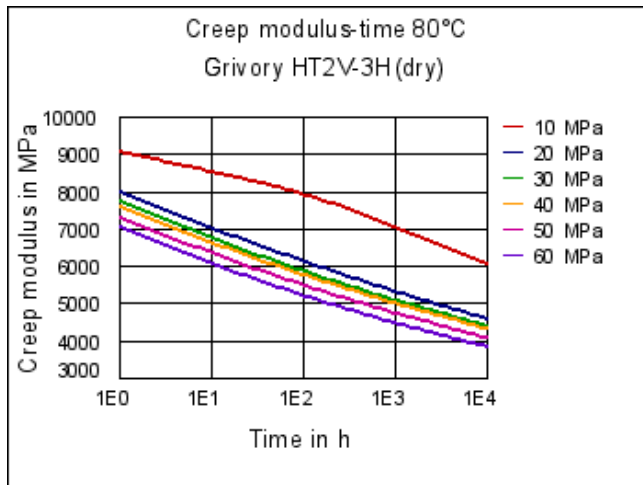


Specific volume-temperature (pvT)

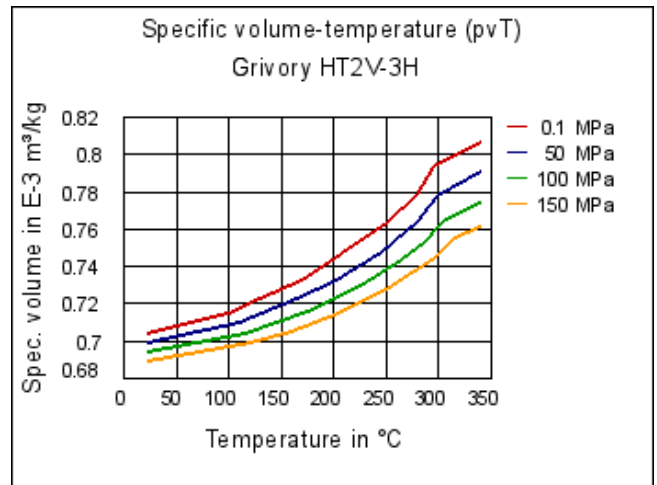

Tensile modulus-temperature

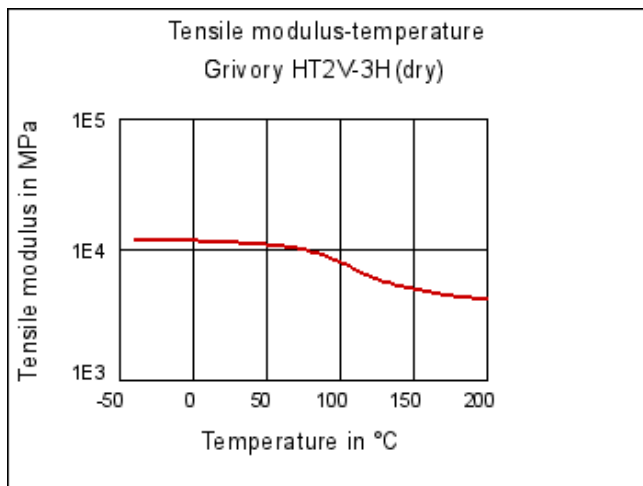

Tensile modulus-temperature

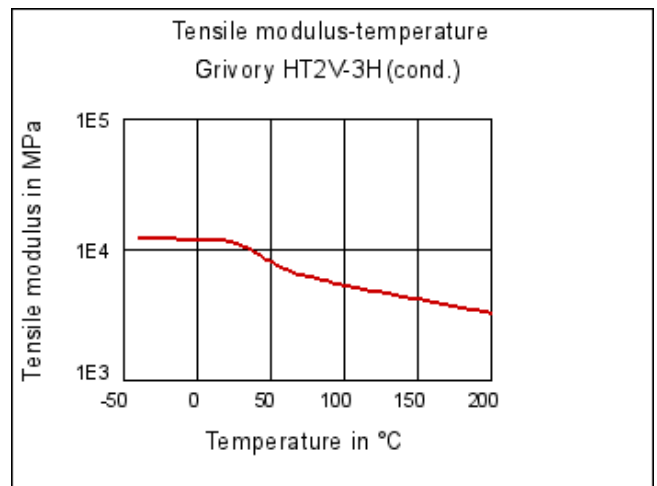

Characteristics

Processing

Injection Molding

Delivery form

Granules

Special Characteristics

Improved UV resistance (outdoor use), Improved heat resistance

Regional Availability

North America, Europe, Asia Pacific, South and Central America, Near East/Africa

Chemical Media Resistance

Automotive

Fuel systems, Powertrain and Chassis , Interior, Exterior

Electricals & Electronics

Connectors, Mobile phones and other portable devices

Industry & Consumer goods









Housewares, Hydraulics & Pneumatics, Mechanical Engineering, Power transmission, Sports & Leisure, Tools & Accessories

Grivory HT2V-3H




PA6T/66-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG




Acids

-  Acetic Acid (5% by mass) (23°C)
-  Citric Acid solution (10% by mass) (23°C)
-  Lactic Acid (10% by mass) (23°C)
-  Hydrochloric Acid (36% by mass) (23°C)
-  Nitric Acid (40% by mass) (23°C)
-  Sulfuric Acid (38% by mass) (23°C)
-  Sulfuric Acid (5% by mass) (23°C)
-  Chromic Acid solution (40% by mass) (23°C)




Bases

-  Sodium Hydroxide solution (35% by mass) (23°C)
-  Sodium Hydroxide solution (1% by mass) (23°C)
-  Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

-  Isopropyl alcohol (23°C)
-  Methanol (23°C)
-  Ethanol (23°C)


Hydrocarbons

-  n-Hexane (23°C)
-  Toluene (23°C)
-  iso-Octane (23°C)





Ketones

-  Acetone (23°C)










Ethers

-  Diethyl ether (23°C)

Mineral oils

-  SAE 10W40 multigrade motor oil (23°C)
-  SAE 10W40 multigrade motor oil (130°C)
-  SAE 80/90 hypoid-gear oil (130°C)
-  Insulating Oil (23°C)

Standard Fuels

-  ISO 1817 Liquid 1 (60°C)
-  ISO 1817 Liquid 2 (60°C)
-  ISO 1817 Liquid 3 (60°C)
-  ISO 1817 Liquid 4 (60°C)
-  Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
-  Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
-  Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

Grivory HT2V-3H

PA6T/66-GF30

EMS-GRIVORY | a unit of EMS-CHEMIE AG

- ☹️ Sodium Chloride solution (10% by mass) (23°C)
- ☹️ Sodium Hypochlorite solution (10% by mass) (23°C)
- ☹️ Sodium Carbonate solution (20% by mass) (23°C)
- ☹️ Sodium Carbonate solution (2% by mass) (23°C)
- ☹️ Zinc Chloride solution (50% by mass) (23°C)

Other

- ☹️ Ethyl Acetate (23°C)
 - ☹️ Hydrogen peroxide (23°C)
 - ☹️ DOT No. 4 Brake fluid (130°C)
 - ☹️ Ethylene Glycol (50% by mass) in water (108°C)
 - ☹️ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
 - ☹️ 50% Oleic acid + 50% Olive Oil (23°C)
 - ☹️ Water (23°C)
 - ☹️ Deionized water (90°C)
 - 🚫 Phenol solution (5% by mass) (23°C)
-