

# HOSTAFORM® C 13021

## HOSTAFORM®

Chemical abbreviation according to ISO 1043-1: POM Molding compound ISO 29988- POM-K, M-GNR, 04-002 POM copolymer Easy flowing Injection molding type for precision molded parts and thin-walled molded parts with high rigidity, hardness and toughness; good chemical resistance to solvents, fuel and strong alkalis as well as good hydrolysis resistance; high resistance to thermal and oxidative degradation. Monomers and additives are listed in EU-Regulation (EU) 10/2011 FDA compliant according to 21 CFR 177.2470 UL-registration for all colours and a thickness more than 1.5 mm as UL 94 HB, temperature index UL 746 B electrical 110 °C, mechanical 90 °C. Burning rate ISO 3795 and FMVSS 302 < 75 mm/min for a thickness more than 1 mm. Ranges of applications: automotive engineering, precision engineering, electric and electrical industry, domestic appliances. FDA = Food and Drug Administration (USA) UL = Underwriters Laboratories (USA) FMVSS = Federal Motor Vehicle Safety Standard (USA)

### Product information

Resin Identification	POM	ISO 1043
Part Marking Code	>POM<	ISO 11469

### Rheological properties

Melt volume-flow rate	12 cm <sup>3</sup> /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage, parallel	2.0 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.8 %	ISO 294-4, 2577

### Typical mechanical properties

Tensile modulus	2900 MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	65 MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	9 %	ISO 527-1/-2
Nominal strain at break	28 %	ISO 527-1/-2
Flexural modulus	2750 MPa	ISO 178
Flexural stress at 3.5%	72 MPa	ISO 178
Tensile creep modulus, 1h	2500 MPa	ISO 899-1
Tensile creep modulus, 1000h	1300 MPa	ISO 899-1
Charpy impact strength, 23°C	200 kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	200 kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	6.5 kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	6 kJ/m <sup>2</sup>	ISO 179/1eA
Ball indentation hardness, H 358/30	143 MPa	ISO 2039-1
Poisson's ratio	0.37 <sup>[C]</sup>	

[C]: Calculated

### Thermal properties

Melting temperature, 10°C/min	166 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	106 °C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	110 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.155 W/(m K)	ISO 22007-2

# HOSTAFORM® C 13021

## HOSTAFORM®

### Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	3 mm	IEC 60695-11-10
UL recognition	yes	UL 94

### Electrical properties

Relative permittivity, 100Hz	4	IEC 62631-2-1
Relative permittivity, 1MHz	4	IEC 62631-2-1
Dissipation factor, 100Hz	20 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	50 E-4	IEC 62631-2-1
Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	35 kV/mm	IEC 60243-1
Comparative tracking index	600	IEC 60112

### Physical/Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.65 %	Sim. to ISO 62
Density	1410 kg/m <sup>3</sup>	ISO 1183

### Injection

Drying Recommended	no
Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	200 °C
Min. melt temperature	190 °C
Max. melt temperature	210 °C
Screw tangential speed	≤0.3 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	80 °C
Max. mould temperature	120 °C
Hold pressure range	60 - 120 MPa
Back pressure	4 MPa
Ejection temperature	130 °C

### Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent

# HOSTAFORM® C 13021

HOSTAFORM®

## Additional information

Injection molding

### Preprocessing

General drying is not necessary due to low moisture absorption of the resin.

In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended.

Max. Water content 0,2 %

### Processing

Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.

### Postprocessing

Conditioning e.g. moisturizing is not necessary.

### Pre-Drying

Drying is not normally required. If material has come in contact with moisture through improper storage or handling or through regrind use, drying may be necessary to prevent splay and odor problems.

### Storage

The product can then be stored in standard conditions until processed.

Processing Notes

## Automotive


OEM	STANDARD	ADDITIONAL INFORMATION
BMW	GS93016	
Bosch	N28 BN22-O024	Colors Made in Frankfurt
Continental	TST N 055 54.07	
Ford	WSK-M4D635-A2	Natural
Ford	WSK-M4D635-A2	Black 12
Mercedes-Benz	DBL5403	(5403.00)
Mercedes-Benz	DBL5405	(5405.01)
Mercedes-Benz	DBL5405-06-POM-C	Natural
Mercedes-Benz	DBL5406	(5406.00)

# HOSTAFORM® C 13021

## HOSTAFORM®

Mercedes-Benz	DBL5410	(5410.00)
Mercedes-Benz	DBL5420	(5420.00)
Renault	F 1605006/ 4901502, No Spec, Special Part Approval, See Your CE Account Manager.	
Renault	UB03f, PMR2020, No Spec, Special Part Approval, See Your CE Account Manager.	


### Viscosity-shear rate

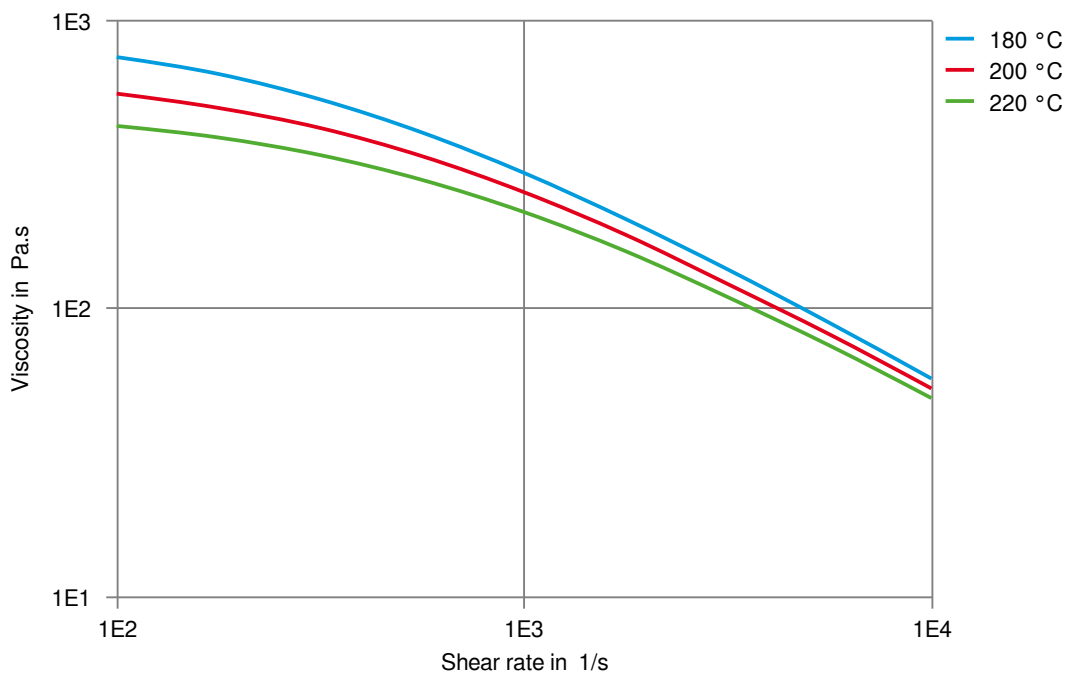

# HOSTAFORM® C 13021

HOSTAFORM®


Shearstress-shear rate

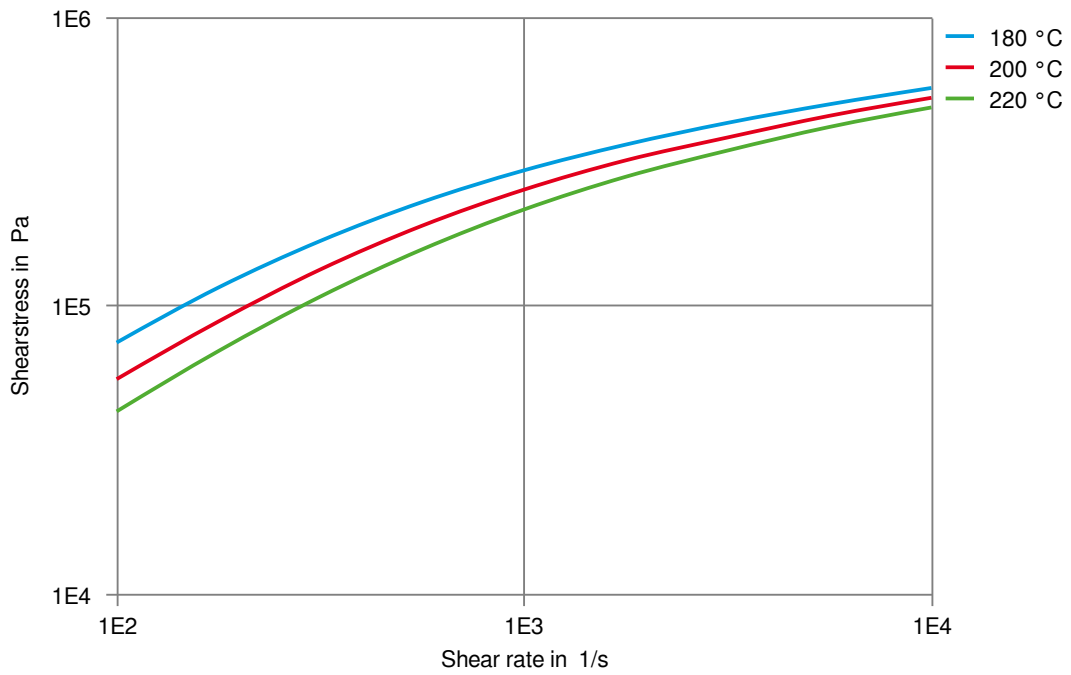

# HOSTAFORM® C 13021

HOSTAFORM®


## Stress-strain

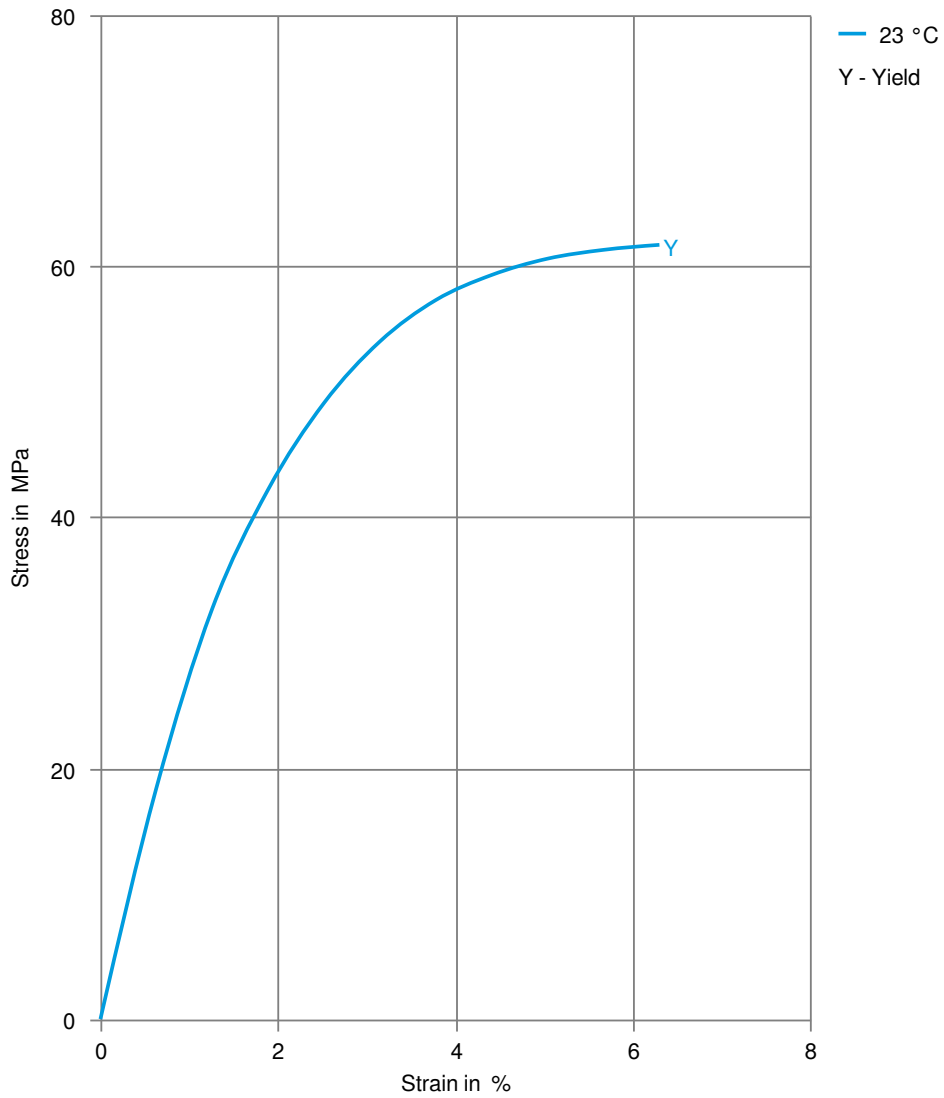

# HOSTAFORM® C 13021

HOSTAFORM®


## Secant modulus-strain

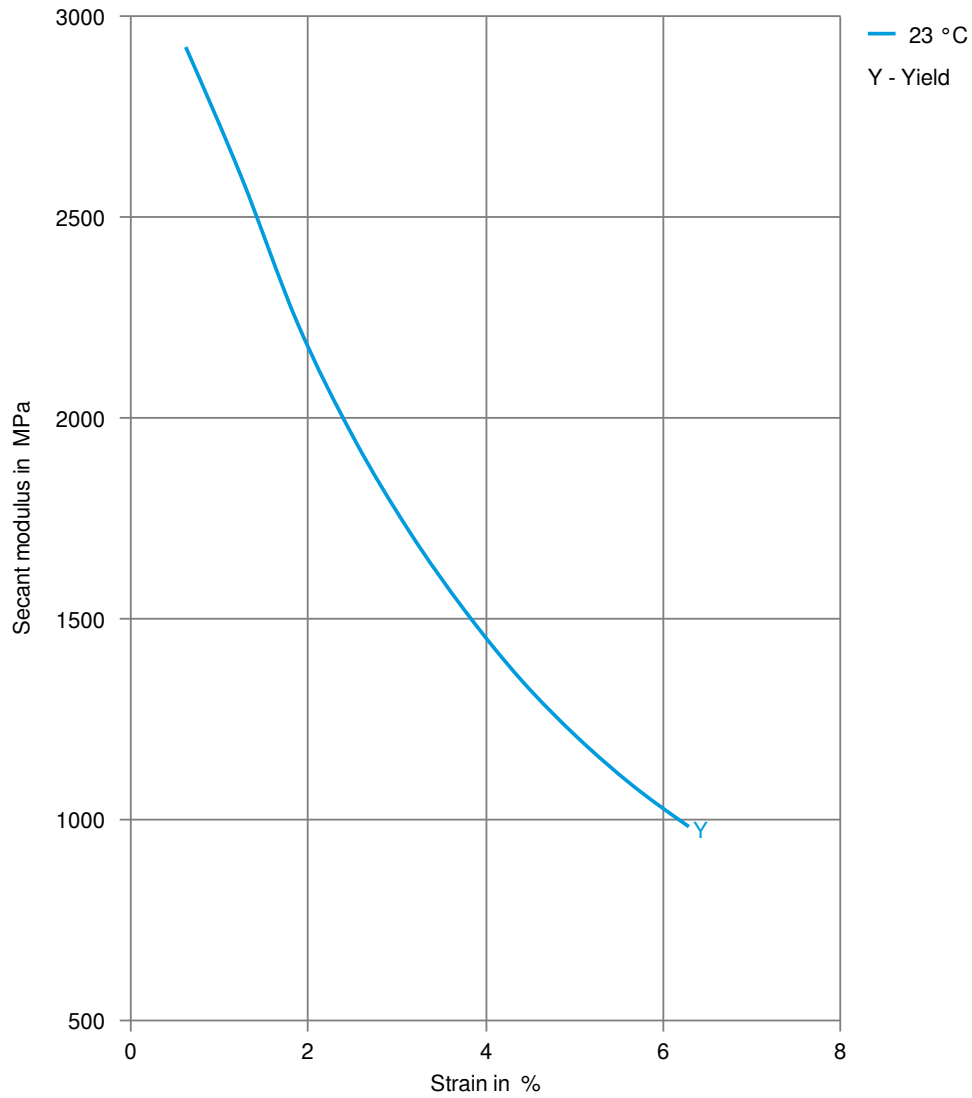

# HOSTAFORM® C 13021

HOSTAFORM®

Stress-strain, 50mm/min

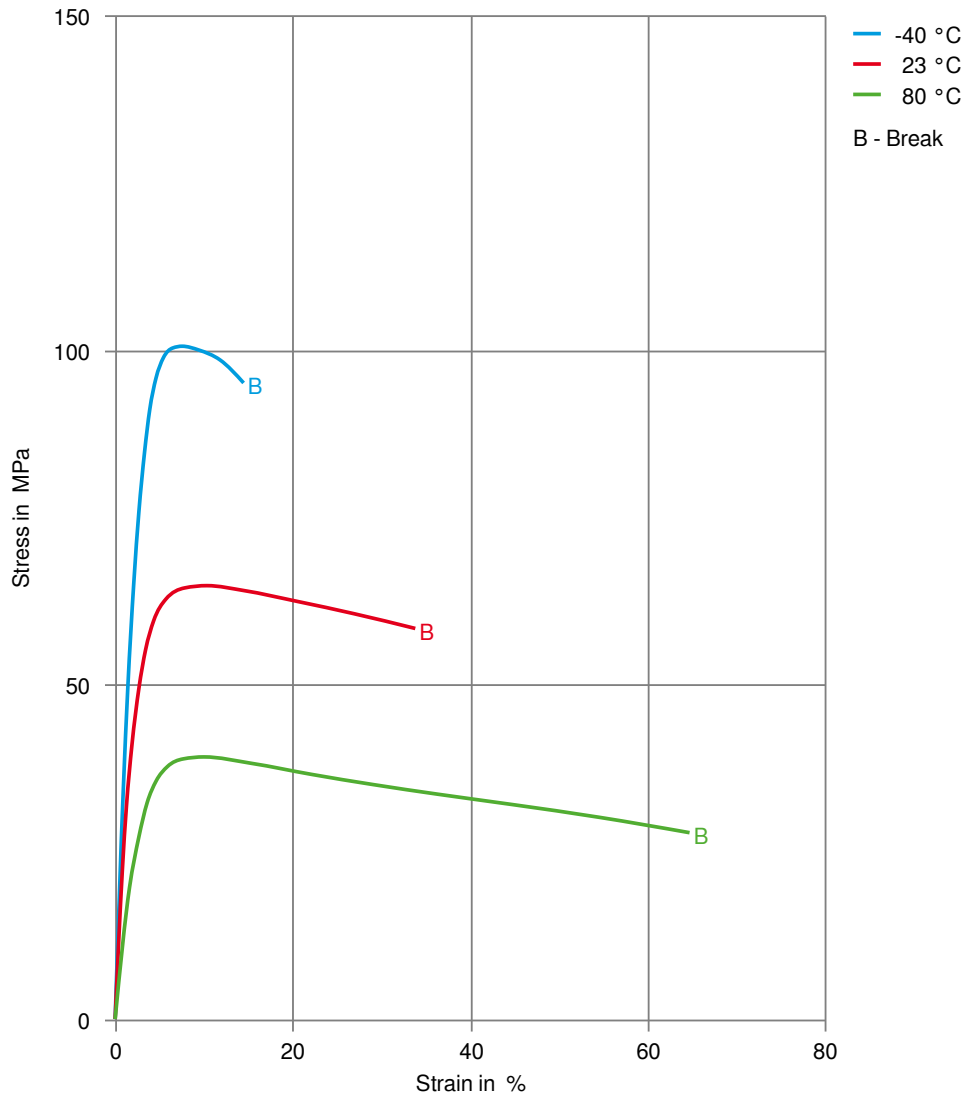

# HOSTAFORM® C 13021

HOSTAFORM®

Secant modulus-strain, 50mm/min

