

HOSTAFORM® C 9021 XAP®

Low Emission
 POM copolymer

Product with reduced emissions especially for automotive interior application. Good properties of the standard-injection molding grades like high rigidity, hardness and toughness; good chemical resistance to solvents, fuel and strong alkalis as well as good hydrolysis resistance; high resistance to thermal and oxidative degradation are maintained

Emission according to VDA 275 < 10 mg/kg (natural grades)

Monomers and additives are listed in EU-Regulation (EU) 10/2011 FDA compliant according to 21 CFR 177.2470

Burning rate ISO 3795 and FMVSS 302 < 75 mm/min for a thickness more than 1 mm.

FDA = Food and Drug Administration (USA) FMVSS = Federal Motor Vehicle Safety Standard (USA)

Rheological properties

Melt volume-flow rate	8 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage range, parallel	2.0 %	ISO 294-4, 2577
Moulding shrinkage range, normal	1.9 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	2850 MPa	ISO 527-1/-2
Yield stress, 50mm/min	64 MPa	ISO 527-1/-2
Yield strain, 50mm/min	9 %	ISO 527-1/-2
Nominal strain at break	30 %	ISO 527-1/-2
Flexural Modulus	2700 MPa	ISO 178
Tensile creep modulus, 1h	2500 MPa	ISO 899-1
Tensile creep modulus, 1000h	1300 MPa	ISO 899-1
Charpy impact strength, 23 °C	220 ^[P] kJ/m ²	ISO 179/1eU
Charpy impact strength, -30 °C	220 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23 °C	6.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30 °C	6 kJ/m ²	ISO 179/1eA
Ball indentation hardness, H 358/30	144 MPa	ISO 2039-1

[P]: Partial Break

Thermal properties

Melting temperature, 10 °C/min	166 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	104 °C	ISO 75-1/-2
Vicat softening temperature, 50 °C/h, 50N	150 °C	ISO 306
Coeff. of linear therm. expansion, parallel	110 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.155 W/(m K)	Internal
Eff. thermal diffusivity	4.85E-8 m ² /s	Internal
Spec. heat capacity of melt	2210 J/(kg K)	Internal

HOSTAFORM® C 9021 XAP®

Electrical properties

Relative permittivity, 100Hz	4	IEC 62631-2-1
Relative permittivity, 1MHz	4	IEC 62631-2-1
Dissipation factor, 100Hz	20 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	50 E-4	IEC 62631-2-1
Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	35 kV/mm	IEC 60243-1
Comparative tracking index	PLC 0 PLC	UL 746A

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.65 %	Sim. to ISO 62
Density	1410 kg/m ³	ISO 1183
Density of melt	1200 kg/m ³	Internal

Injection

Drying Temperature	100 - 120 °C	
Drying Time, Dehumidified Dryer	3 - 4 h	
Processing Moisture Content	0.15 %	
Screw tangential speed	0.2 - 0.21 m/s	
Max. mould temperature	80 - 120 °C	
Back pressure	4 MPa	
Injection speed	slow-medium	
Ejection temperature	140 °C	Internal

Characteristics


Additives Release agent

Additional information

Injection molding Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.


HOSTAFORM® C 9021 XAP®

Viscosity-shear rate

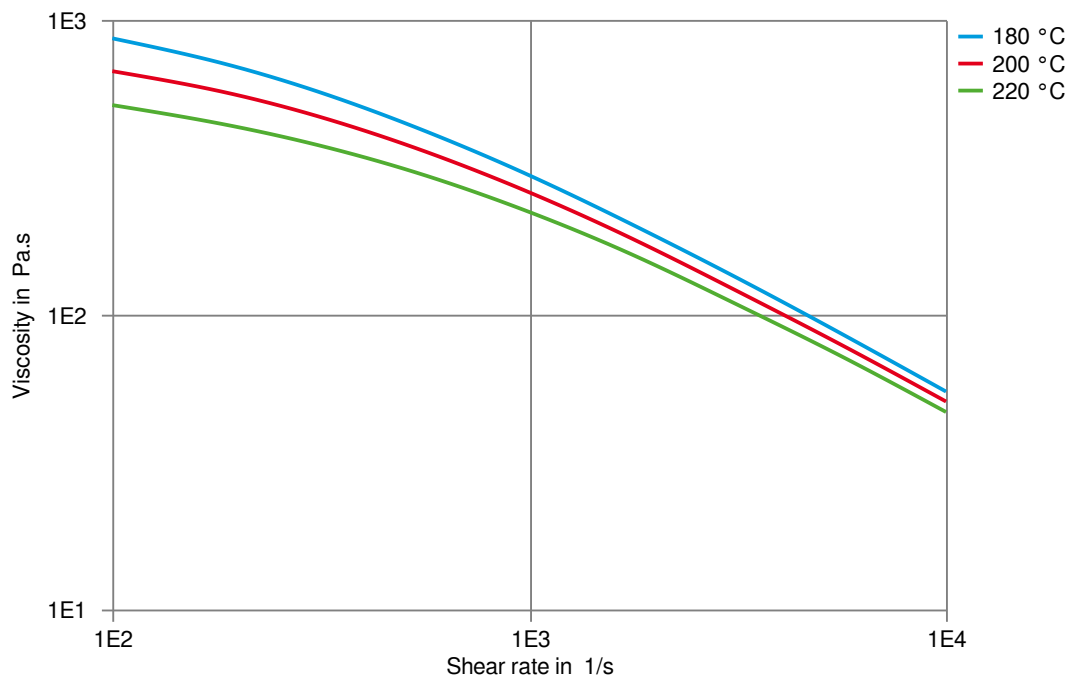


HOSTAFORM® C 9021 XAP®

Shearstress-shear rate

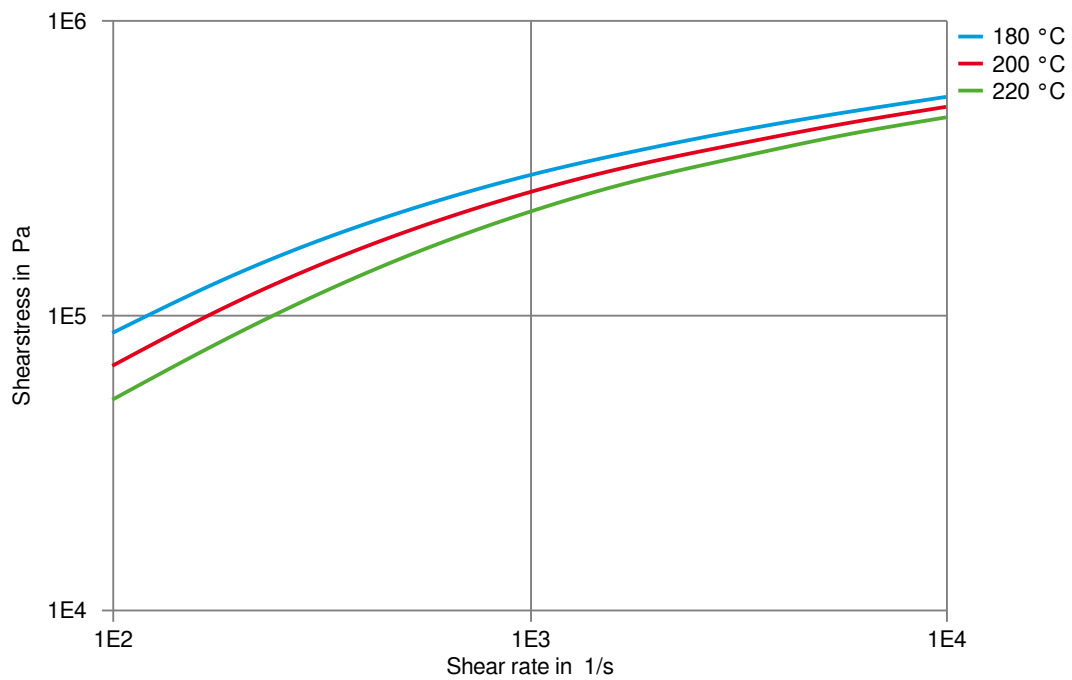


HOSTAFORM® C 9021 XAP®

Stress-strain

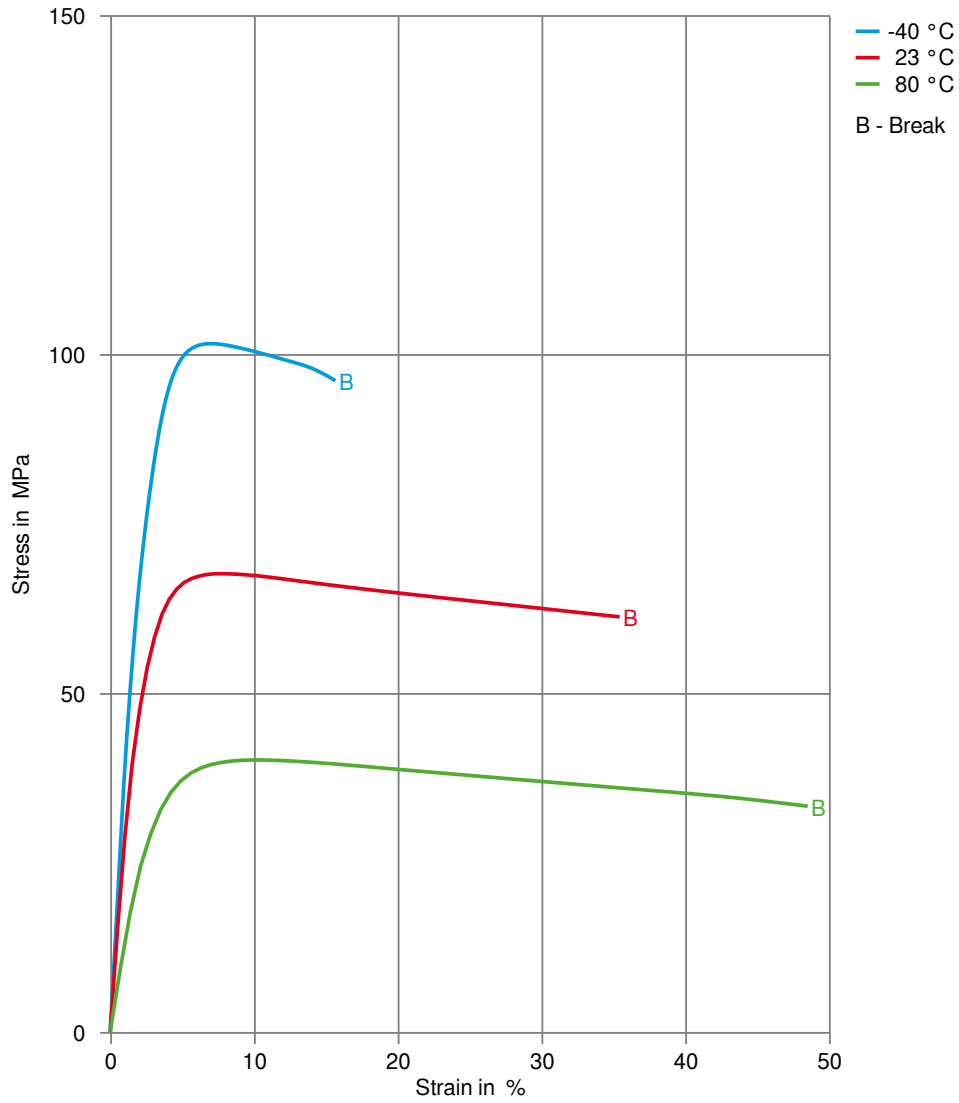


HOSTAFORM® C 9021 XAP®

Secant modulus-strain

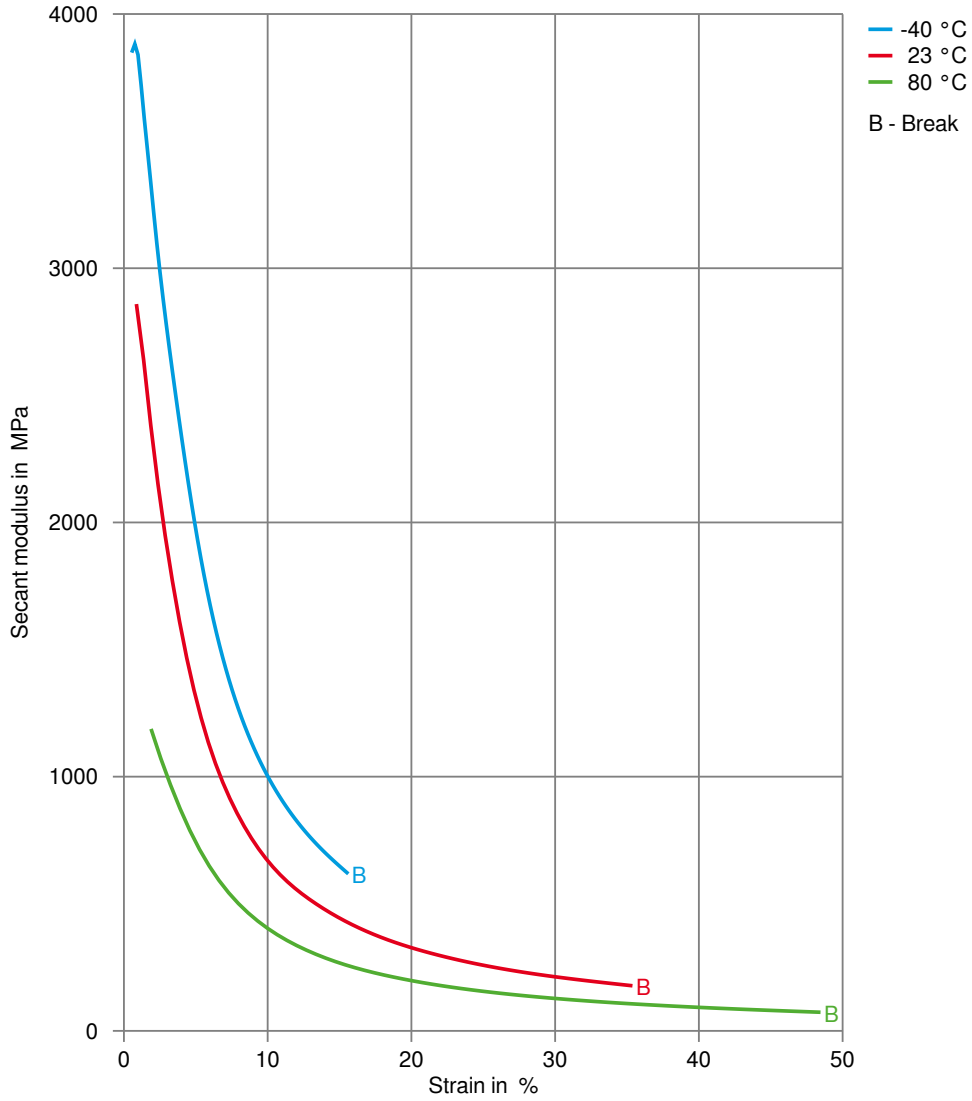


HOSTAFORM® C 9021 XAP®

Stress-strain (isochronous) 23°C

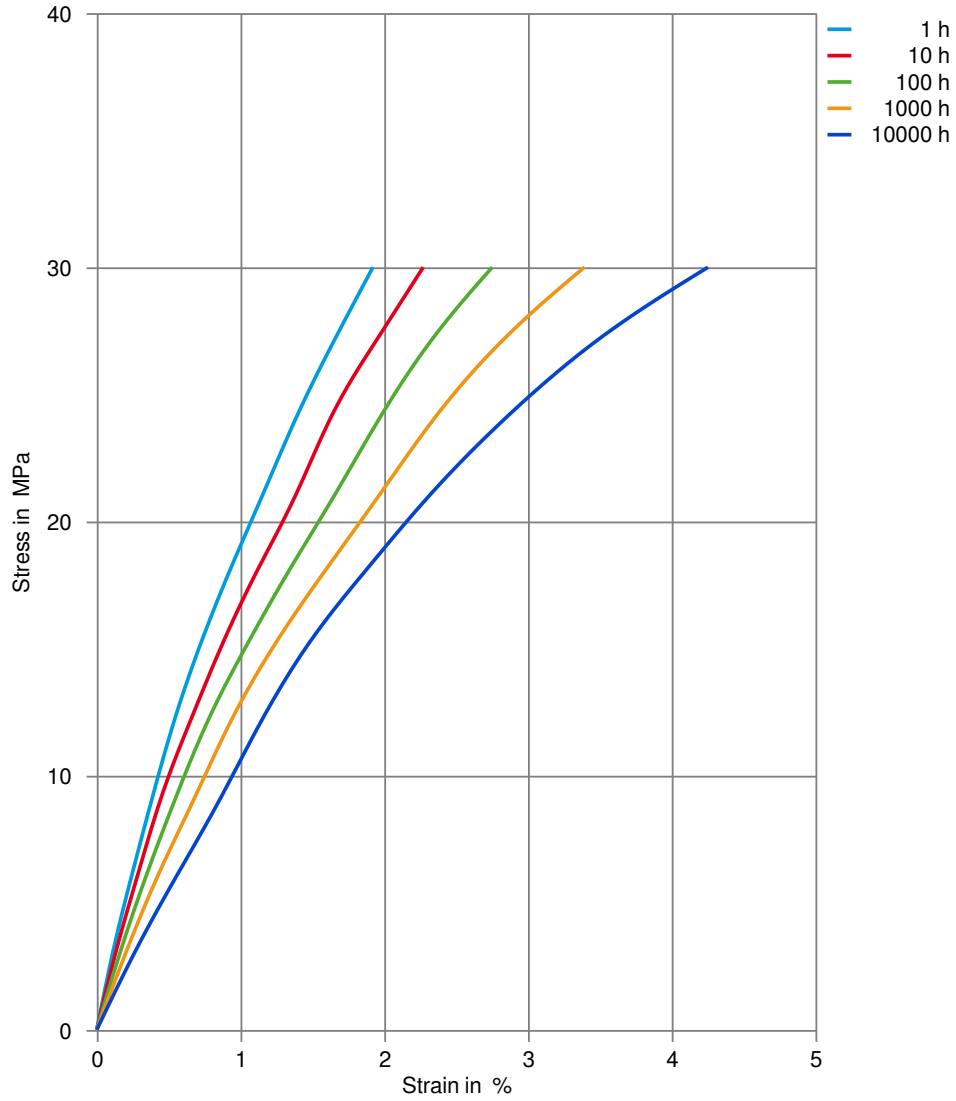


HOSTAFORM® C 9021 XAP®

Creep modulus-time 23°C

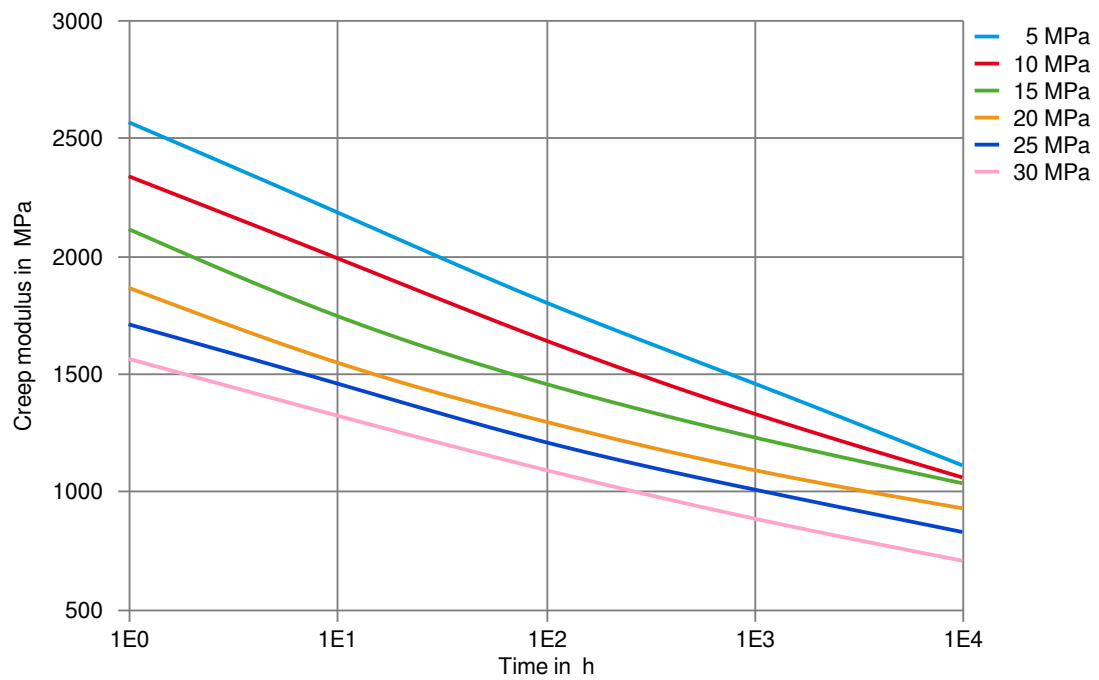

HOSTAFORM® C 9021 XAP®

True stress-strain

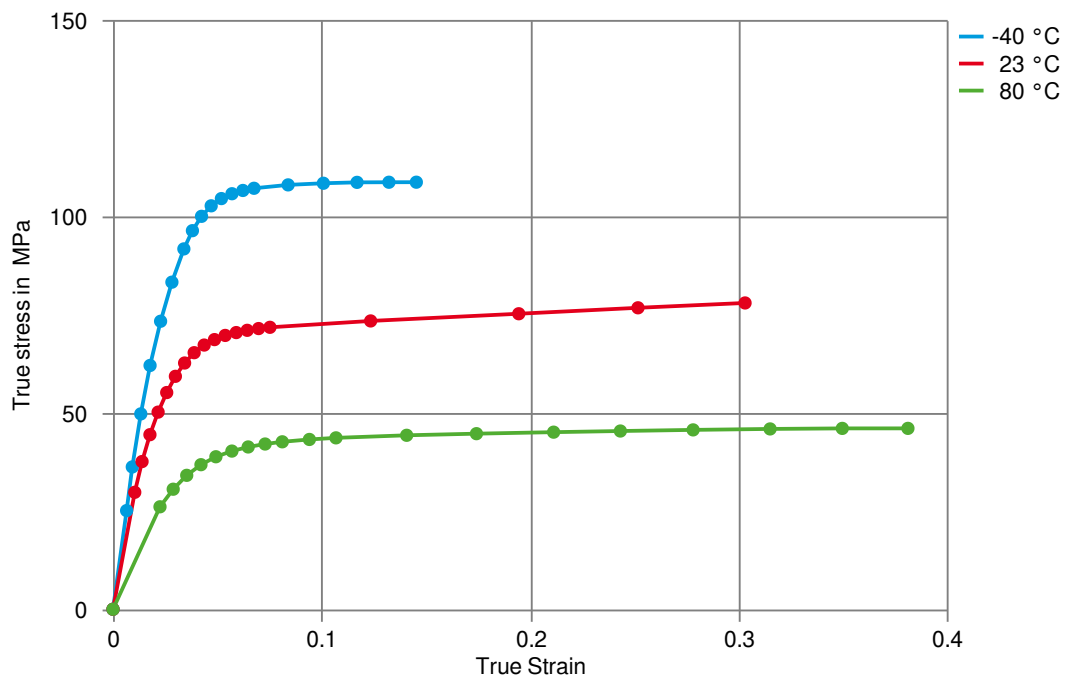

HOSTAFORM® C 9021 XAP®

Processing Texts

Pre-drying	It is normally not necessary to dry HOSTAFORM. However, should there be surface moisture (condensate) on the molding compound as a result of incorrect storage, drying is required. A circulating air drying cabinet can be used for this purpose if the granul
Longer pre-drying times/storage	The product can then be stored in standard conditions until processed.
Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
Injection molding Preprocessing	To achive low emission values pre drying using a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended. Max. Water content 0,1 %
Injection molding Postprocessing	Conditioning e.g. moisturizing is not necessary.

Other Approvals

Other Approvals

OEM	Specification	Additional Information
GM	GMW22P-POM-C2D	Natural & Black