

# HOSTAFORM® C 9021

## HOSTAFORM®

Chemical abbreviation according to ISO 1043-1: POM Molding compound ISO 29988- POM-K, M-GNR, 03-002 POM copolymer Medium viscosity molding grade with high rigidity, hardness and toughness; good chemical resistance to solvents, fuel and strong alkalis as well as good hydrolysis resistance; high resistance to thermal and oxidative degradation. Monomers and additives are listed in EU-Regulation (EU) 10/2011 FDA compliant according to 21 CFR 177.2470 UL-registration for all colours and a thickness more than 1.5 mm as UL 94 HB, temperature index UL 746 B electrical 110 °C, mechanical 90 °C. Burning rate ISO 3795 and FMVSS 302 < 75 mm/min for a thickness more than 1 mm. Ranges of applications: automotive engineering, precision engineering, electric and electronical industry, domestic appliances. FDA = Food and Drug Administration (USA) FMVSS = Federal Motor Vehicle Safety Standard (USA) UL = Underwriters Laboratories (USA)

### Product information

|                      |       |           |
|----------------------|-------|-----------|
| Resin Identification | POM   | ISO 1043  |
| Part Marking Code    | >POM< | ISO 11469 |

### Rheological properties

|                              |                          |                 |
|------------------------------|--------------------------|-----------------|
| Melt volume-flow rate        | 8 cm <sup>3</sup> /10min | ISO 1133        |
| Temperature                  | 190 °C                   |                 |
| Load                         | 2.16 kg                  |                 |
| Moulding shrinkage, parallel | 2.0 %                    | ISO 294-4, 2577 |
| Moulding shrinkage, normal   | 1.9 <sup>[1]</sup> %     | ISO 294-4, 2577 |
| [1]: @ 195 °C                |                          |                 |

### Typical mechanical properties

|  |                                      |              |
|--|--------------------------------------|--------------|
| Tensile modulus                        | 2850 MPa                             | ISO 527-1/-2 |
| Tensile stress at yield, 50mm/min      | 64 MPa                               | ISO 527-1/-2 |
| Tensile strain at yield, 50mm/min      | 9 %                                  | ISO 527-1/-2 |
| Nominal strain at break                | 30 %                                 | ISO 527-1/-2 |
| Flexural modulus                       | 2700 MPa                             | ISO 178      |
| Flexural strength                      | 89 MPa                               | ISO 178      |
| Flexural stress at 3.5%                | 72 MPa                               | ISO 178      |
| Compressive stress at 1% strain        | 24 MPa                               | ISO 604      |
| Tensile creep modulus, 1h              | 2500 MPa                             | ISO 899-1    |
| Tensile creep modulus, 1000h           | 1300 MPa                             | ISO 899-1    |
| Charpy impact strength, 23 °C          | 220 <sup>[P]</sup> kJ/m <sup>2</sup> | ISO 179/1eU  |
| Charpy impact strength, -30 °C         | 220 kJ/m <sup>2</sup>                | ISO 179/1eU  |
| Charpy notched impact strength, 23 °C  | 6.5 kJ/m <sup>2</sup>                | ISO 179/1eA  |
| Charpy notched impact strength, -30 °C | 6 kJ/m <sup>2</sup>                  | ISO 179/1eA  |
| Ball indentation hardness, H 358/30    | 144 MPa                              | ISO 2039-1   |
| Poisson's ratio                        | 0.399                                |              |

[P]: Partial Break

### Thermal properties

|  |           |                |
|--|-----------|----------------|
| Melting temperature, 10 °C/min                           | 166 °C    | ISO 11357-1/-3 |
| Temperature of deflection under load, 1.8 MPa            | 104 °C    | ISO 75-1/-2    |
| Temperature of deflection under load, 0.45 MPa           | 160 °C    | ISO 75-1/-2    |
| Coefficient of linear thermal expansion (CLTE), parallel | 110 E-6/K | ISO 11359-1/-2 |
| Coefficient of linear thermal expansion (CLTE), normal   | 110 E-6/K | ISO 11359-1/-2 |

# HOSTAFORM® C 9021

## HOSTAFORM®

|                              |               |             |
|------------------------------|---------------|-------------|
| Thermal conductivity of melt | 0.155 W/(m K) | ISO 22007-2 |
|------------------------------|---------------|-------------|

### Flammability

|                                      |          |                 |
|--------------------------------------|----------|-----------------|
| Burning Behav. at 1.5mm nom. thickn. | HB class | IEC 60695-11-10 |
| Thickness tested                     | 1.5 mm   | IEC 60695-11-10 |
| Burning Behav. at thickness h        | HB class | IEC 60695-11-10 |
| Thickness tested                     | 3 mm     | IEC 60695-11-10 |
| UL recognition                       | yes      | UL 94           |

### Electrical properties

|   |            |                 |
|---|------------|-----------------|
| Relative permittivity, 100Hz                                | 4          | IEC 62631-2-1   |
| Relative permittivity, 1MHz                                 | 4          | IEC 62631-2-1   |
| Dissipation factor, 100Hz                                   | 20 E-4     | IEC 62631-2-1   |
| Dissipation factor, 1MHz                                    | 50 E-4     | IEC 62631-2-1   |
| Volume resistivity  | 1E12 Ohm.m | IEC 62631-3-1   |
| Surface resistivity   | 1E14 Ohm   | IEC 62631-3-2   |
| Electric strength   | 35 kV/mm   | IEC 60243-1     |
| Comparative tracking index                                  | 600        | IEC 60112       |
| Relative permittivity, printed circuits and boards, 2.5 GHz | 3          | IEC 61189-2-721 |
| Relative permittivity, printed circuits and boards, 10 GHz  | 3.2        | IEC 61189-2-721 |
| Dissipation factor, printed circuits and boards, 2.5 GHz    | 466 E-4    | IEC 61189-2-721 |
| Dissipation factor, printed circuits and boards, 10 GHz     | 144 E-4    | IEC 61189-2-721 |

### Physical/Other properties

|                          |                        |                |
|--------------------------|------------------------|----------------|
| Humidity absorption, 2mm | 0.2 %                  | Sim. to ISO 62 |
| Water absorption, 2mm    | 0.65 %                 | Sim. to ISO 62 |
| Density                  | 1410 kg/m <sup>3</sup> | ISO 1183       |

### Injection

|                                 |              |
|---------------------------------|--------------|
| Drying Recommended              | no           |
| Drying Temperature              | 100 °C       |
| Drying Time, Dehumidified Dryer | 3 - 4 h      |
| Processing Moisture Content     | ≤0.2 %       |
| Melt Temperature Optimum        | 200 °C       |
| Min. melt temperature           | 190 °C       |
| Max. melt temperature           | 210 °C       |
| Screw tangential speed          | ≤0.3 m/s     |
| Mold Temperature Optimum        | 100 °C       |
| Min. mould temperature          | 80 °C        |
| Max. mould temperature          | 120 °C       |
| Hold pressure range             | 60 - 120 MPa |
| Back pressure                   | 4 MPa        |
| Ejection temperature            | 127 °C       |

# HOSTAFORM® C 9021

## HOSTAFORM®

### Characteristics

|               |  |
|---------------|--|
| Processing    | Injection Moulding, Film Extrusion, Extrusion, Sheet Extrusion, Other Extrusion, Blow Moulding |
| Delivery form | Pellets  |
| Additives     | Release agent  |

### Additional information

Injection molding

#### Preprocessing

General drying is not necessary due to low moisture absorption of the resin.

In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended.

Max. Water content 0,2 %

#### Processing

Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.

#### Postprocessing

Conditioning e.g. moisturizing is not necessary.

Film extrusion

#### Preprocessing

General drying is not necessary due to low moisture absorption of the resin.

In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended.

Max. Water content 0,2 %

#### Processing

Standard extruders with grooved feed zone and short compression screws (minimum 25 D) will fit.

Melt temperature 180-190 °C

# HOSTAFORM® C 9021

HOSTAFORM®

## Postprocessing

Conditioning e.g. moisturizing is not necessary.

In case of very thick wall thickness profiles after-annealing it is recommended to reduce internal stress.

Annealing temperature 130-140 °C  
Annealing time 10 min/mm thickness

Other extrusion

## Preprocessing

General drying is not necessary due to low moisture absorption of the resin.

In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended.

Max. Water content 0,2 %

## Processing

Standard extruders with grooved feed zone and short compression screws (minimum 25 D) will fit.

Melt temperature 180-190 °C

## Postprocessing

Conditioning e.g. moisturizing is not necessary.

In case of very thick wall thickness profiles after-annealing it is recommended to reduce internal stress.

Annealing temperature 130-140 °C  
Annealing time 10 min/mm thickness

Sheet extrusion

## Preprocessing

General drying is not necessary due to low moisture absorption of the resin.

In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended.

# HOSTAFORM® C 9021

HOSTAFORM®

Max. Water content 0,2 %

## Processing

Standard extruders with grooved feed zone and short compression screws (minimum 25 D) will fit.

Melt temperature 180-190 °C

## Postprocessing

Conditioning e.g. moisturizing is not necessary.

In case of very thick wall thickness profiles after-annealing it is recommended to reduce internal stress.

Annealing temperature 130-140 °C  
Annealing time 10 min/mm thickness

## Processing Notes

## Pre-Drying

Drying is not normally required. If material has come in contact with moisture through improper storage or handling or through regrind use, drying may be necessary to prevent splay and odor problems.

## Storage

The product can then be stored in standard conditions until processed.

## Automotive


| OEM            | STANDARD        | ADDITIONAL INFORMATION |
|----------------|-----------------|------------------------|
| BAIC           | Q-BJEV 01.59    |                        |
| BMW            | GS93016         |                        |
| Bosch          | N28 BN22-O010   | Colors                 |
| Continental    | SN 57914-7      |                        |
| Continental    | TST N 055 54.07 |                        |
| Ford           | WSK-M4D635-A2   | Natural                |
| Ford           | WSK-M4D635-A2   | Black 14               |
| General Motors | GMW22P-POM-C2   | Natural                |
| Hyundai        | MS237-14 Type A |                        |

# HOSTAFORM® C 9021

## HOSTAFORM®

|                       |                              |                                   |
|-----------------------|------------------------------|-----------------------------------|
| Mercedes-Benz         |                              | Door Lock Parts                   |
| Mercedes-Benz         | DBL5405-06-POM-C             | 'Polyoxymethylene Copolymer'      |
| Nissan                | EP03-3                       |                                   |
| Nissan                | UB15b                        |                                   |
| Stellantis            | MS.502xx / POM-C.2400F.5C.MF | 01994_14_00056, CPN 1532, CPN1586 |
| Stellantis - Chrysler | MS.50095 / CPN-1532          | Natural                           |
| Tesla                 | TM-1001-TMEP 3082            | 14 BLACK-IPH                      |
| VW Group              | TL 526 36A                   |                                   |
| VW Group              | TL 526 36C                   |                                   |


### Viscosity-shear rate

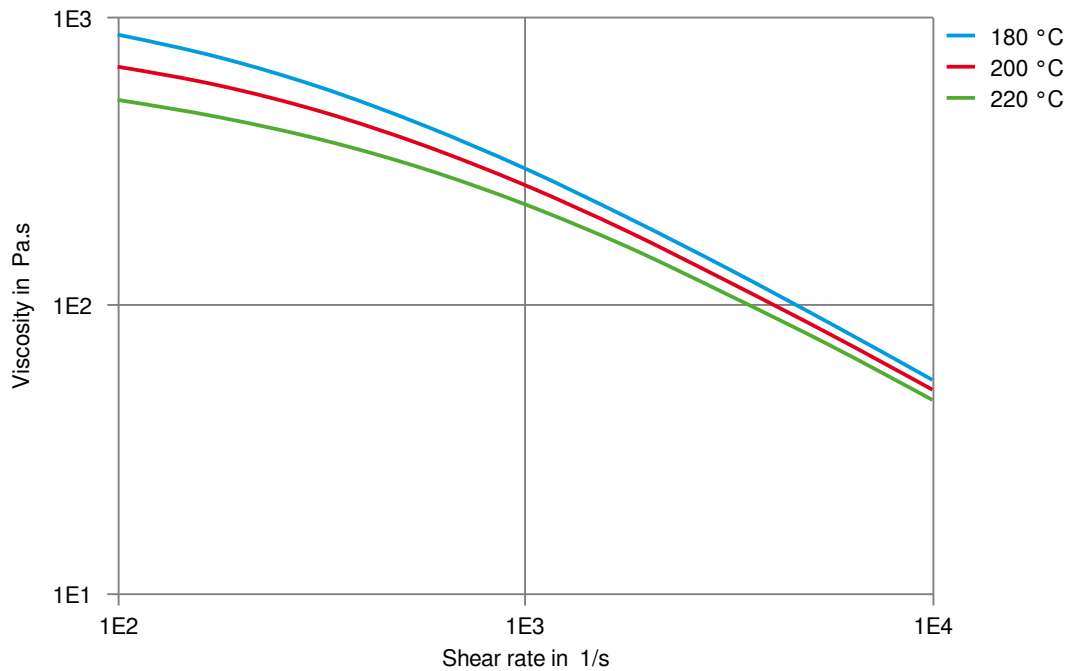

# HOSTAFORM® C 9021

HOSTAFORM®


Shearstress-shear rate

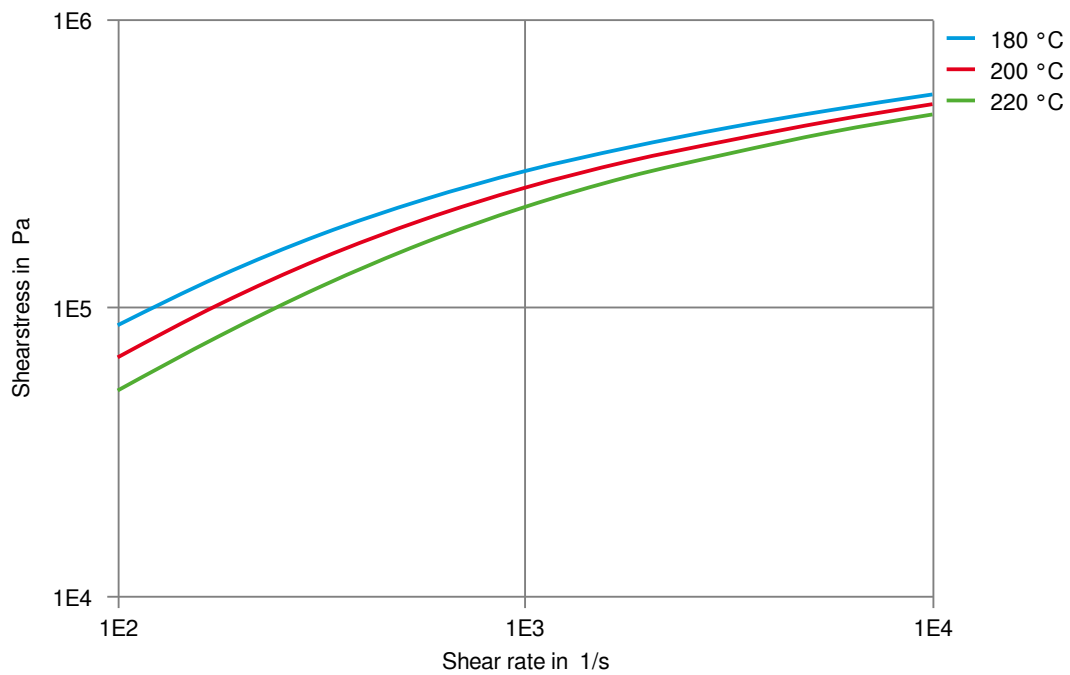

# HOSTAFORM® C 9021

HOSTAFORM®


## Stress-strain

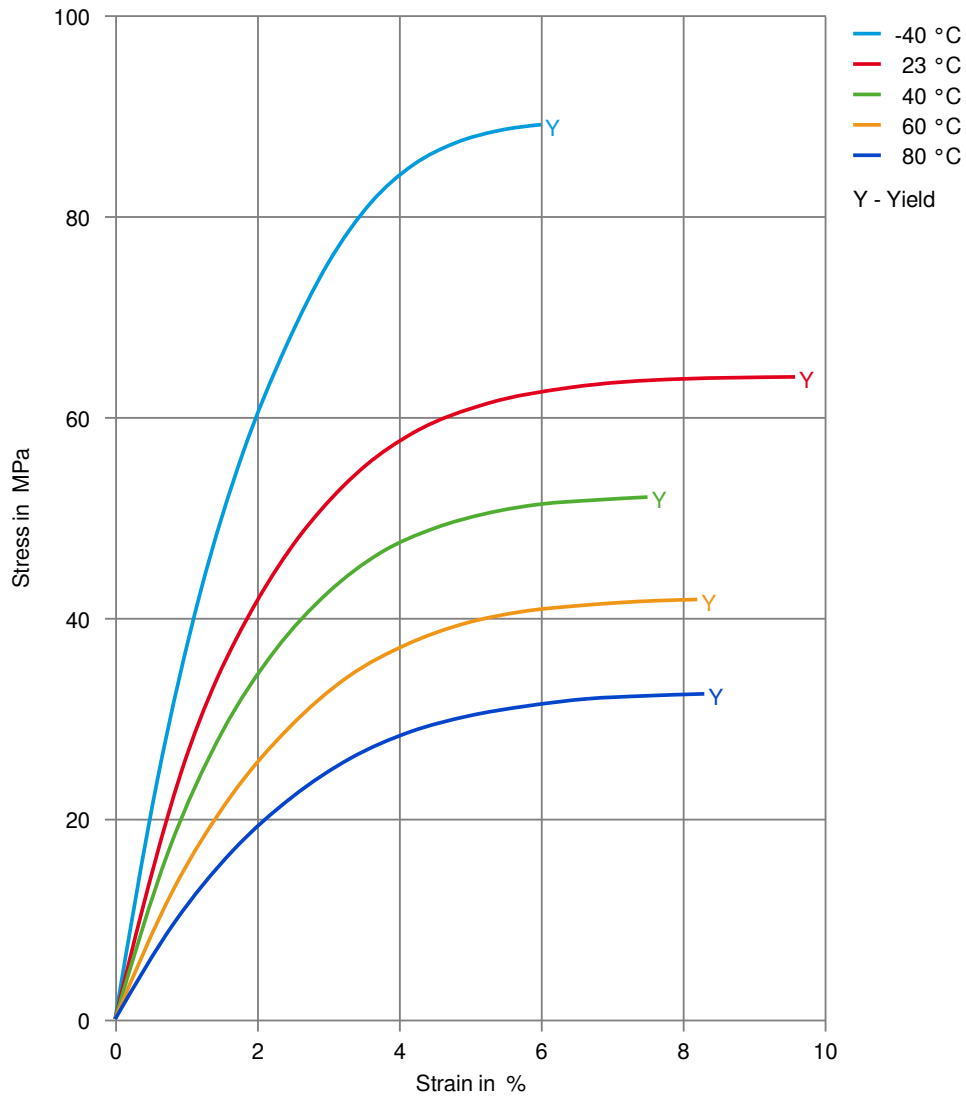

# HOSTAFORM® C 9021

HOSTAFORM®


## Secant modulus-strain

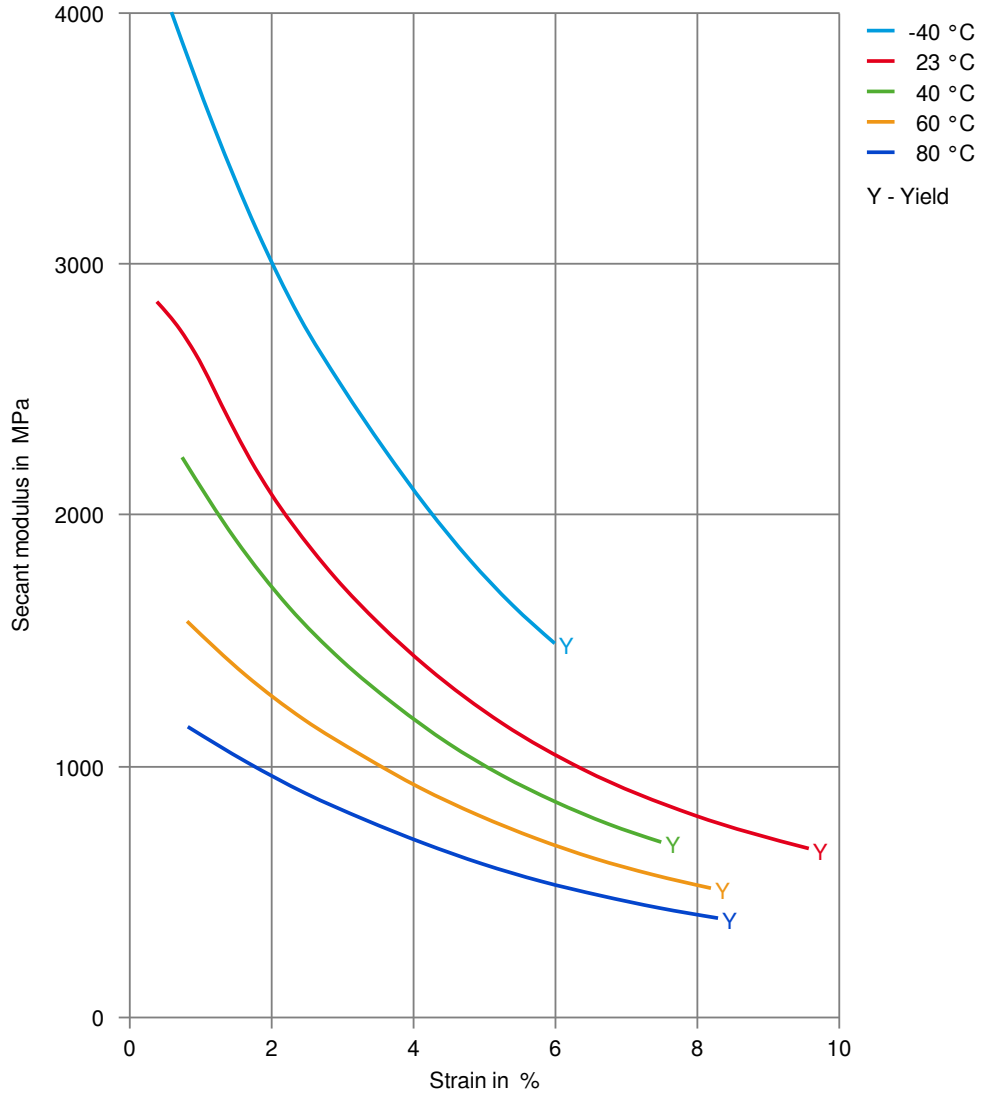

# HOSTAFORM® C 9021

HOSTAFORM®


Stress-strain, 50mm/min

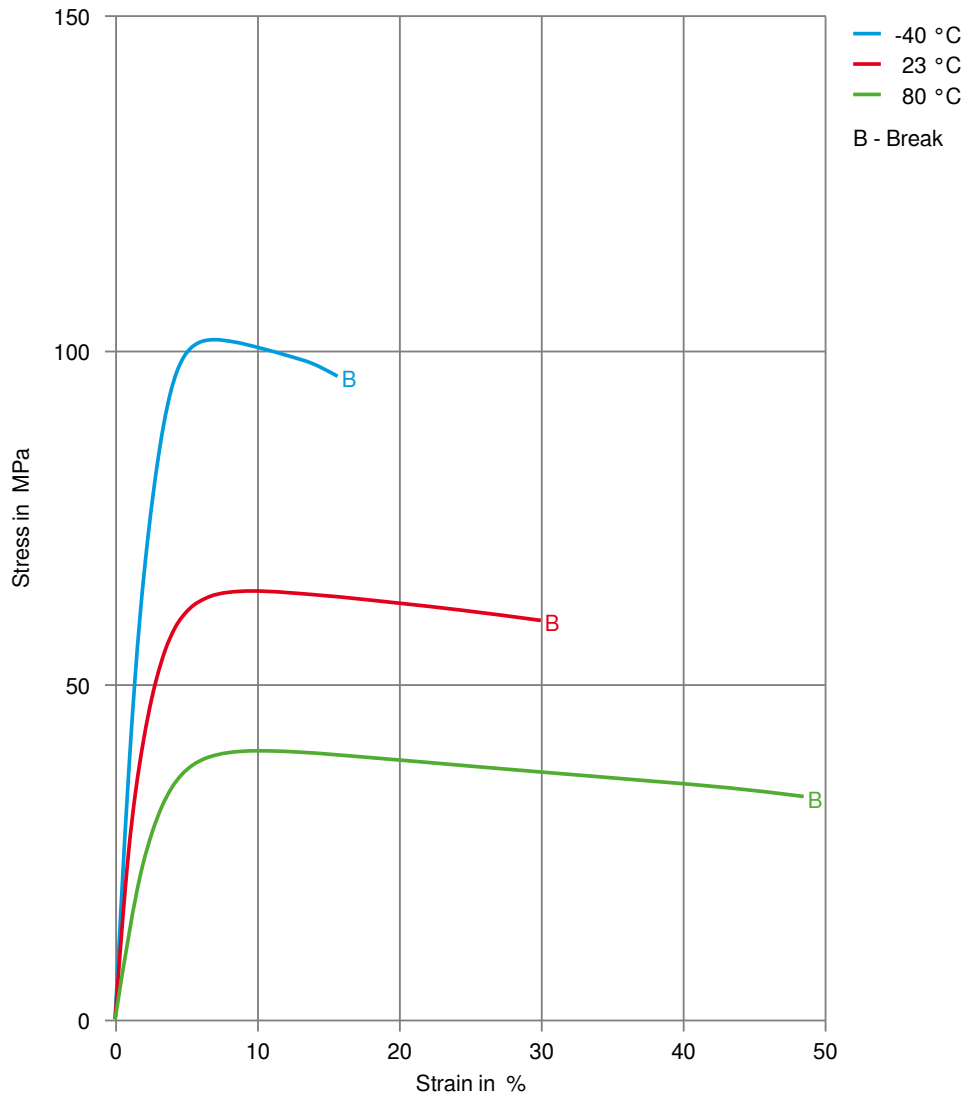

# HOSTAFORM® C 9021

HOSTAFORM®


Secant modulus-strain, 50mm/min

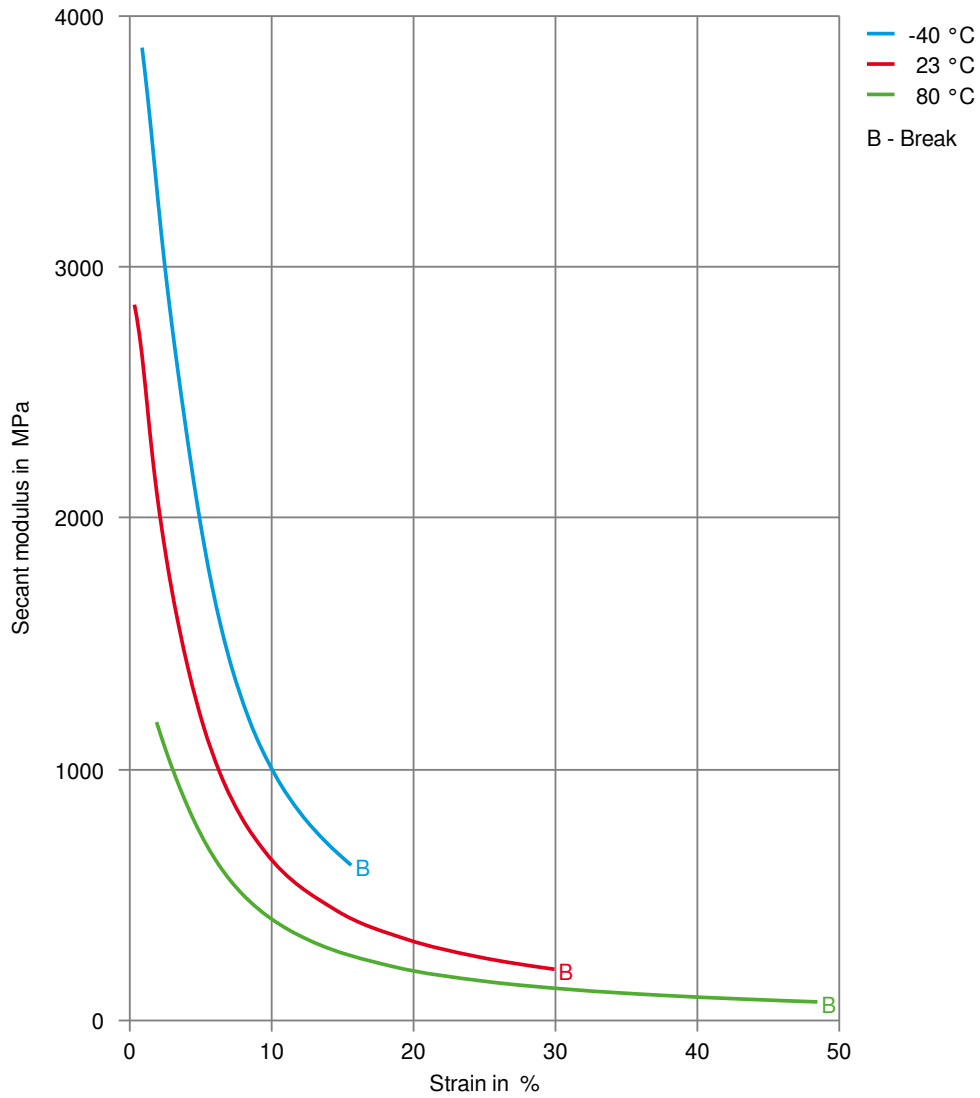

# HOSTAFORM® C 9021

HOSTAFORM®


Creep modulus-time 60°C

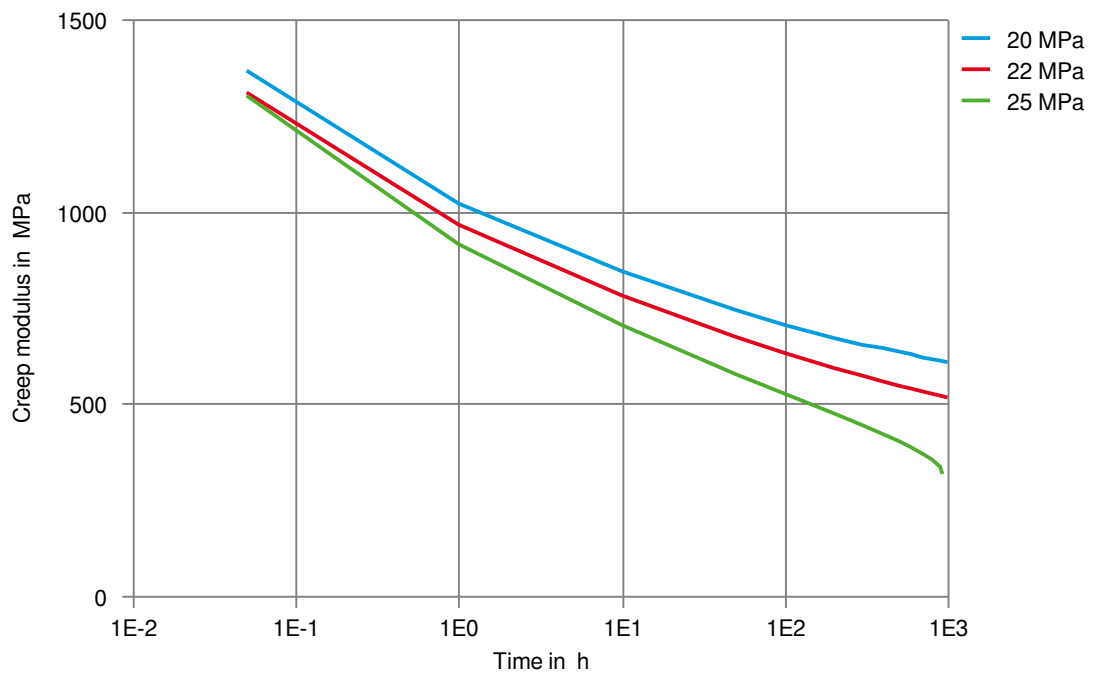

# HOSTAFORM® C 9021

HOSTAFORM®


Creep strain-time 60°C

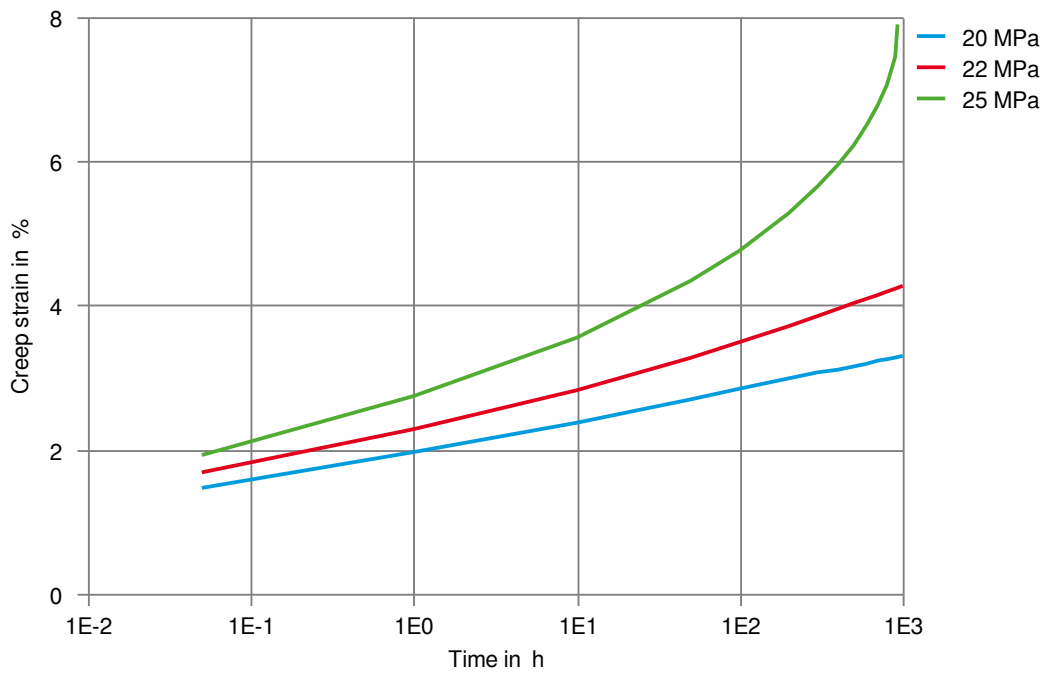

# HOSTAFORM® C 9021

HOSTAFORM®

Creep modulus-time 90°C

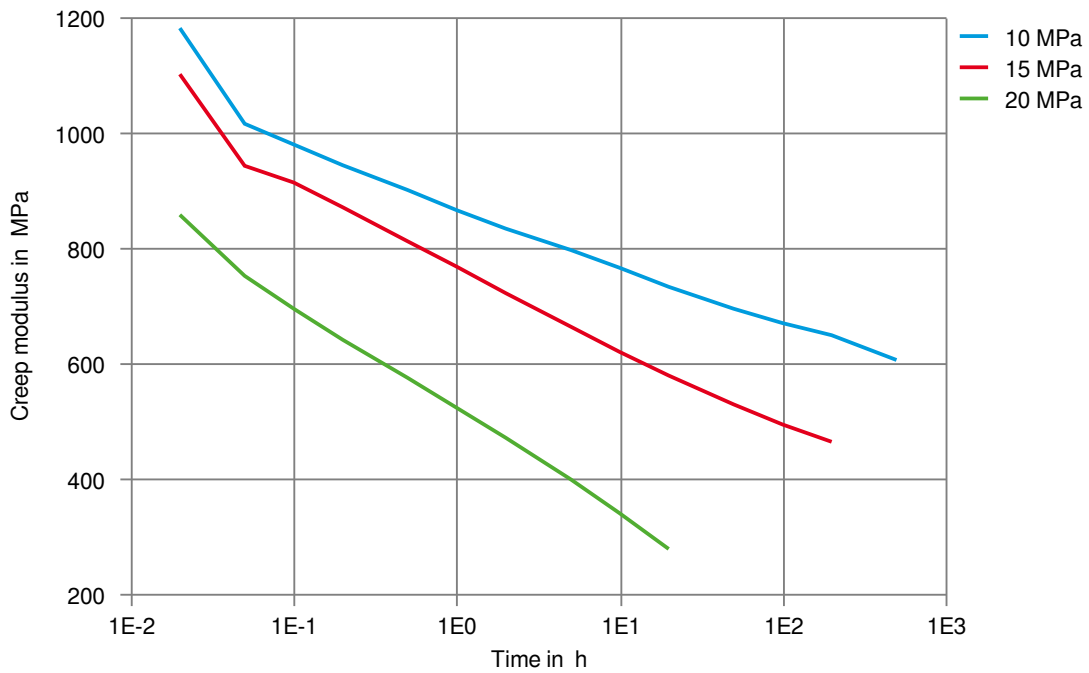

# HOSTAFORM® C 9021

HOSTAFORM®

Creep strain-time 90°C

