

HOSTAFORM® UV140LG XAP®

HOSTAFORM®

Hostaform® acetal copolymer grade UV140LG XAP® is a specialty grade of acetal copolymer formulated to provide good flow with a low gloss finish and a UV stability necessary for interior automotive applications. In addition, Hostaform® UV140LG XAP® exhibits low emissions for automotive interiors. Low emission Performance [VDA 275] <10 PPM

Product information

Resin Identification	POM	ISO 1043
Part Marking Code	>POM<	ISO 11469

Rheological properties

Melt volume-flow rate	13 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage, parallel	2.0 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.8 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	2100 MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	48 MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	10 %	ISO 527-1/-2
Charpy notched impact strength, 23°C	3.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	4 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.4 ^[C]	

[C]: Calculated

Thermal properties

Melting temperature, 10°C/min	168 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	85 °C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	147 °C	ISO 75-1/-2

Physical/Other properties

Density	1370 kg/m ³	ISO 1183
---------	------------------------	----------

Injection

Drying Recommended	no
Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	190 °C
Min. melt temperature	180 °C
Max. melt temperature	195 °C
Screw tangential speed	≤0.3 m/s
Mold Temperature Optimum	90 °C
Min. mould temperature	80 °C
Max. mould temperature	105 °C
Hold pressure range	60 - 120 MPa
Back pressure	4 MPa

HOSTAFORM® UV140LG XAP®

HOSTAFORM®

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Special characteristics	U.V. stabilised or stable to weather, Reduced gloss, Low emissions

Additional information

Processing Notes

Pre-Drying

Predrying is required before processing to ensure a low gloss finish.


Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
General Motors	GMW16657P-POM	Natural

HOSTAFORM® UV140LG XAP®

HOSTAFORM®

Stress-strain

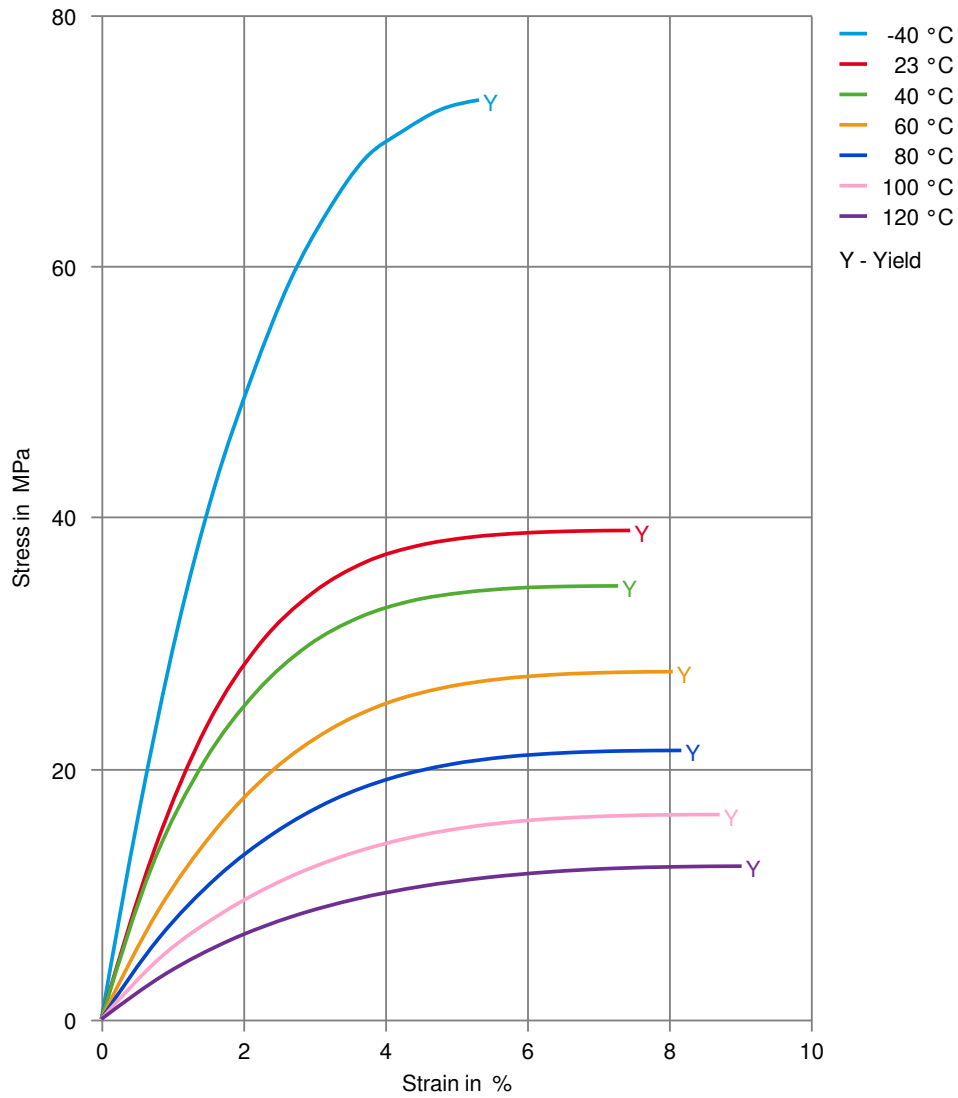

HOSTAFORM® UV140LG XAP®

HOSTAFORM®

Secant modulus-strain

